



Monkey Toe[®] Modular Fixed Platform System

The Monkey Toe[®] Fixed Platform mounting system ensures, tidy installation of Series of Condenser units, larger Package units and other heavier pieces of Plant. All fixings are through the Monkey Toe[®] roofing clips which ensure excellent roof protection from incompatible materials, incorrect fixing procedures, debris traps and blocked roofing pans. Platforms can be fully meshed to provide safe durable maintenance areas or can be of a skeletal construction to provide support for the unit only. Platforms supported on fully welded trusses fabricated to suit the roof pitch and purlin spacing's. Handrails and Louver supports can be simply fixed to the Monkey Toe[®] Fixed Platform system to further enhance the presentation of the installation if it is visible from public areas or a fall by a service man of greater than 1000mm is possible.

Features

- Prefabricated modular componentry ensures easy on site assembly
 - No welding required
- Lightweight, high strength aluminum construction
- Able to support up to 1800Kg (indicative only)
- Able to be installed by one or two men
- Low maintenance and neat appearance
- Suits many varied applications and locations

Specification Summary

Supply and install the proprietary Monkey Toe[®] Fixed Platform system as per Manufacturer Monkey Toe Systems Ltd specifications and Project Drawings. Platforms designed and manufactured to suit each individual application. Contact Monkey Toe Systems Ltd for details regarding platform design. No galvanized fixings or components may be connected to the Monkey Toe[®] Fixed Platform system.

System Applications

- Ideally suited as a service platform for a series of Condenser units, fans or other roof mounted equipment
- Landings for roof area entry and exit
- Viewing decks
- Platforms for reception equipment
- Platforms for Larger Package units

Technical Data

Material

All componentry and accessories manufactured from high grade structural aluminum with options for powder coating.

Design

Platforms designed to suit each individual installation by Monkey Toe Systems Ltd designers and contract engineers.

Fixings


Monkey Toe[®] roof connections

Inspection and Maintenance


Visual inspection for any damage or loose fixings must be done periodically and prior to use. No certified maintenance is required. Basic wear and tear preventative maintenance is recommended.

Important Note

Failure to supply and/or install proprietary product in accordance with above specification and installation/ usage guidelines voids complete system certification and/or warranty.

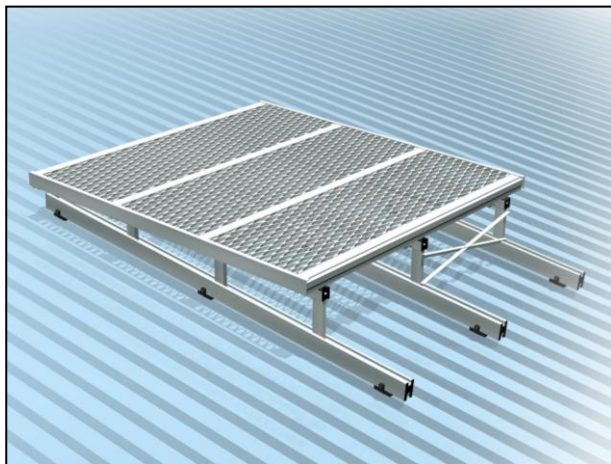

Mesh Platform

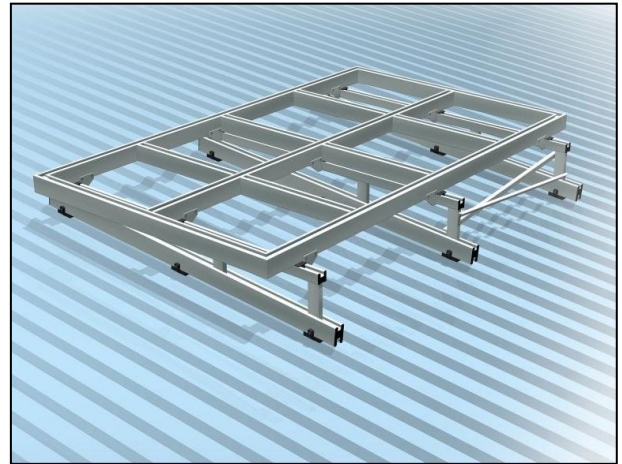

Skeletal Platform