


#### Name Your Color...Name Your Look. Call It...

# **ENDURA**®



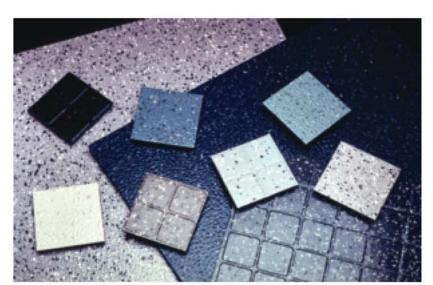

Since 1981, Endura flooring products have been specified for their excellent aesthetic appeal, no-wax maintenance, durability and slip-resistance.

Today, Endura is used worldwide in thousands of commercial, institutional and industrial facilities.

Colors Endura products are available in hundreds of colors that complement any interior or design.


- > SprintStock® Colors Solid and Flecksibles® colors available with low minimums.
- > SpectraColors® 200+ special colors (2,500 s.f. minimums)
- **Custom Colors** Endura can be color-matched to any fabric, carpet or finish (2,500 s.f. minimums)

Patterns Endura tiles come in a variety of surface patterns, including SimplySmooth®, Round, Square, Sculptured, Bison, Domino, EcoScore™ and SRT. Endura stair tread patterns include Round, Square, Diamond, Safety and One-Step® Sculptured.

Safety Highly slip-resistant, Endura products help mitigate the risk of slips and falls in high traffic areas and exceed ADA slip-resistance recommendations.

Durability Endura is backed by a 10 year wear warranty and is one of the best life-cycle flooring values available.

Care Endura's built-in waxes produce a natural luster that requires no waxing or stripping and lowers maintenance costs. Oil, grease and other spills are easily removed without harsh chemicals that can damage the environment.

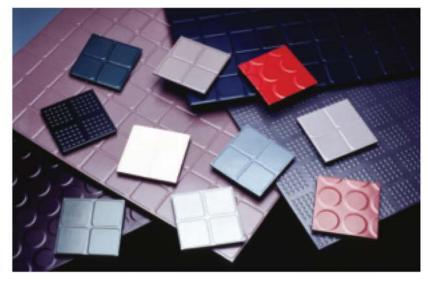










# **NEW** from Endura for 2005...



- Multifunctional Athletic Rubber Flooring
- 67% Post-Consumer Recycled Content
- Eligible for LEED™ Points
- 10 Year Wear Warranty
- High Slip-Resistance

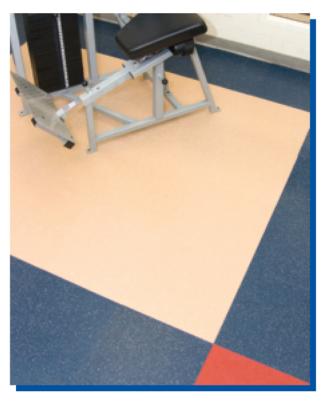

# Simply Smooth.

- Smooth sheet flooring benefits... without the drawbacks
- 35½" x 35½" tiles... easy to handle and install
- Seam-weldable
- No pattern matching
- Cove up walls
- Flecksibles and SpectraColors palettes
- No-wax maintenance










# **Typical Applications**


Endura has been installed worldwide in hundreds of stadiums and arenas, sports and entertainment facilities, schools and universities, government and military sites, as well as in healthcare, industrial, justice and correctional, museum, commercial, office, retail and transportation facilities.

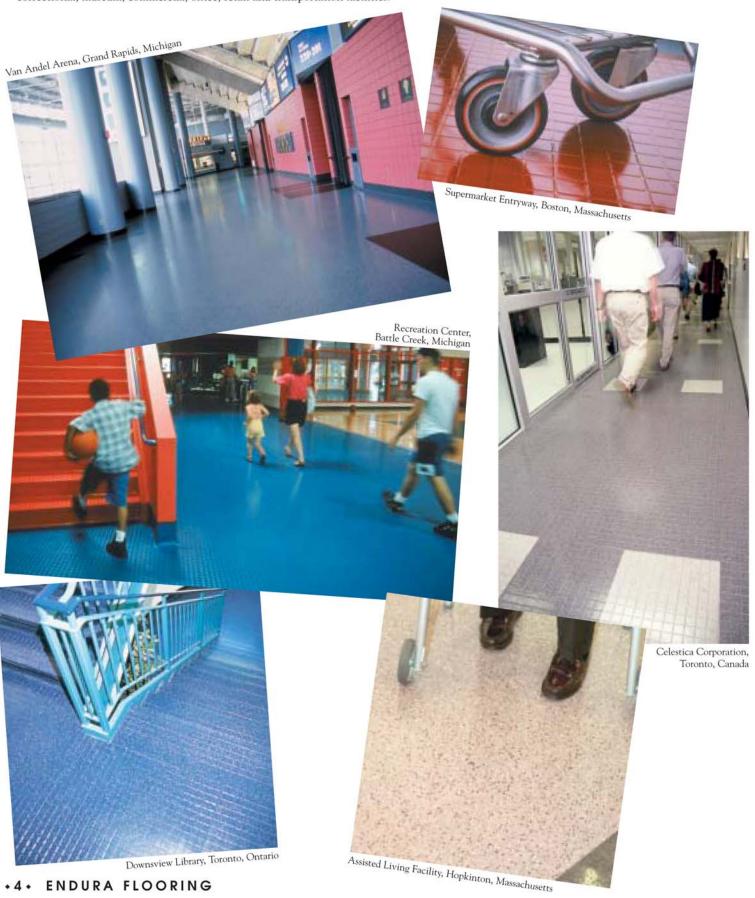



# Floor Tile Surface Patterns and Dimensions

Endura **Standard Pattern** tiles are available in SprintStock colors with low square foot minimums. Endura **Special Pattern** tiles are available with 2,500 square foot minimums.

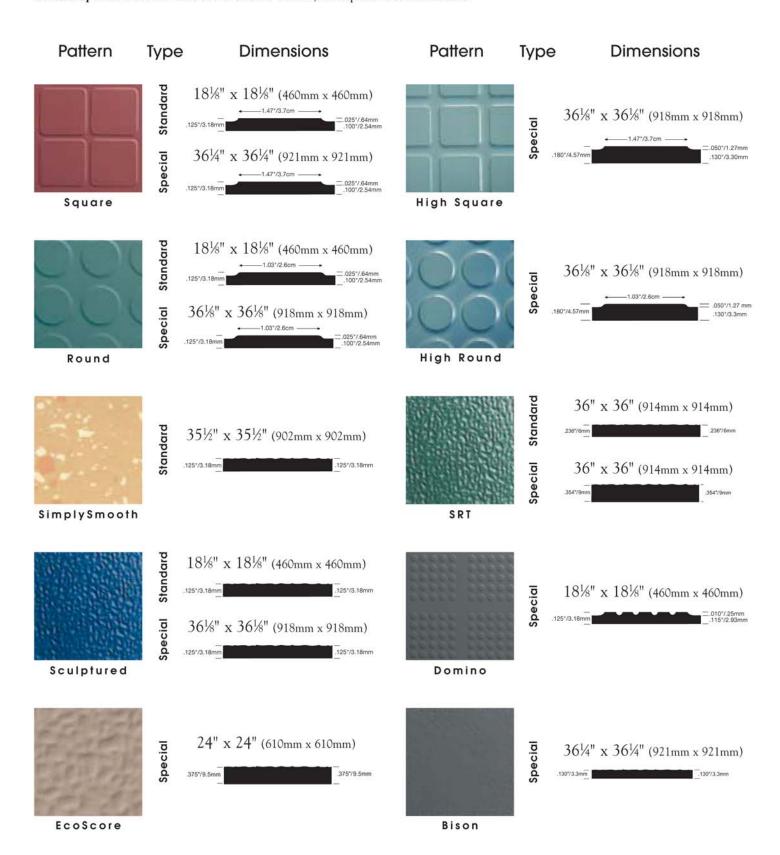

# **Standard Colors and Availability**

		TILES							TREADS						BASE	
SOLIDS		SIMPLY	ROUND	SQUARE	SCULPTURED	SRT SCULPTURED	ECOSCORE	OGR SCULPTURED	ROUND	SQUARE	ONE-STEP SCULPTURED	VISUAL ALERT	NOSING	RISERS	4" COVE BASE	
	01 Malibu Sand		•	•					•	•		•	•	•	•	
	22 Cyanara						•									
	37 Fog		•	•			•		•	•	•	•	•	•	•	
	39 Aspen Blue		•	•					•	•		•	•	•	•	
	60 Alpine Green					•	•									
	66 Toucan Red						•	•								
	68 Purple Shadow		•	•					•	•		•	•	•	•	
	72 Black		•	•		•	•	•	•	•	•	•	•	•	•	
	73 Charcoal Gray		•	•		•	•	•	•	•	•	•	•	•	•	
	75 Night Blue		•	•		•	•		•	•		•	•	•	•	
	78 Teal		•	•					•	•		•		•	•	
	82 Burgundy		•	•						•		•	•	•	•	
	91 Taupe		•	•		***************************************			•	•		•		•	•	
	95 Brook Pebble		•	•			•		•			•		•	•	
	97 Redware		•	•		***************************************				•		•	•	•	•	
	99 Hazard Yellow							•								
FLECKSIBLES														Use S	olids:	
	08 Newsprint						•									
	09 Sandy Beach						•									
	10 Shale Gray	•		•	•		•			•	•	•		37, 72	or 73	
	11 Sahara Beige	•		•	•		•			•		•		01, 91 or 95		
	12 Starlight Blue	•		•	•		•			•	•	•		39 o	r 75	
	13 Spruce Blue	•		•	•		•			•		•		37, 39	or 75	
	14 Granite Gray	•		•	•		•			•	•	•		37 or 72		
	18 Clay Taupe	•		•	•					•		•		91 or 95		
	19 Barley Beige	•		•	•		•			•		•		01, 91	or 95	
100	20 Rose Gray	•		•	•					•		•		72, 73	or 82	


Colors above reproduced as close as possible to actual colors as printing processes allow. Use sample or strike-off of color before placing order.

## **SpectraColors®**

Endura SpectraColors® consist of over 170 exciting Flecksibles® and Solid colors that complement contract interior color and design trends. The minimum order size for each SpectraColor or custom color is only 2,500 square feet. Minimums can be less under certain circumstances; call Endura for details. Matching SpectraColor cove base (3,000 linear feet minimum), stair treads and risers are also available. To request an individual sample of any SpectraColor, contact Endura or an Endura distributor. SpectraColor strike-off samples are usually sent within five to seven business days of request. SpectraColors shown below are reproduced as closely as possible to actual product colors as printing processes allow. Color accuracy may vary. Endura assumes no responsibility for differences between colors shown and actual product colors. Not all Flecksibles patterns shown are to the same scale.

**Custom Colors** For a minimum order of only 2,500 square feet, Endura tiles and stair treads can be custom color-matched to any color fabric, carpet, paint or other finish. Custom color options include solid colors and Endura Flecksibles. Custom Flecksibles colors can include any solid base color of your choice, except white, and up to three different color "chips" made from Endura's solid base color selection. Production minimums apply (see above). Call for details on submitting custom color-matched specs.

#### **SpectraFlecks**

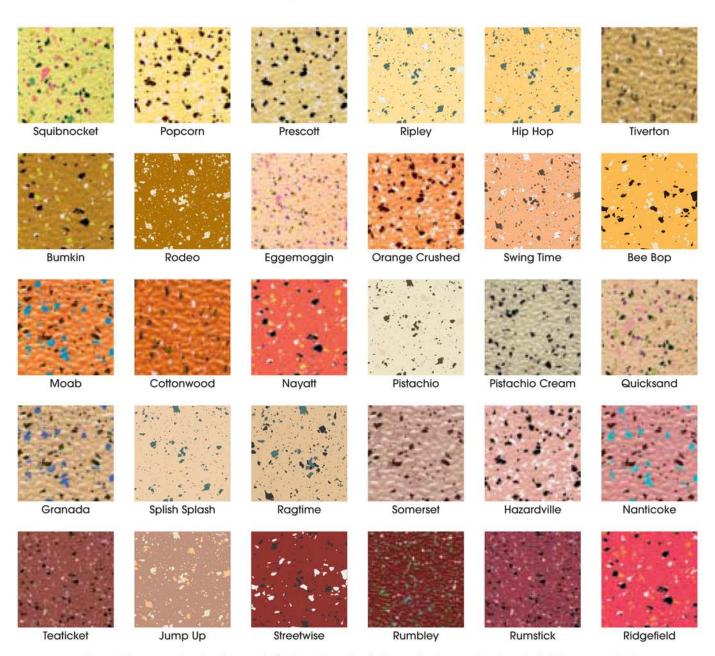


The minimum order size for each Endura SpectraColor or Custom color is only 2,500 square feet

## **SpectraFlecks**



The minimum order size for each Endura SpectraColor or Custom color is only 2,500 square feet

#### **SpectraFlecks**

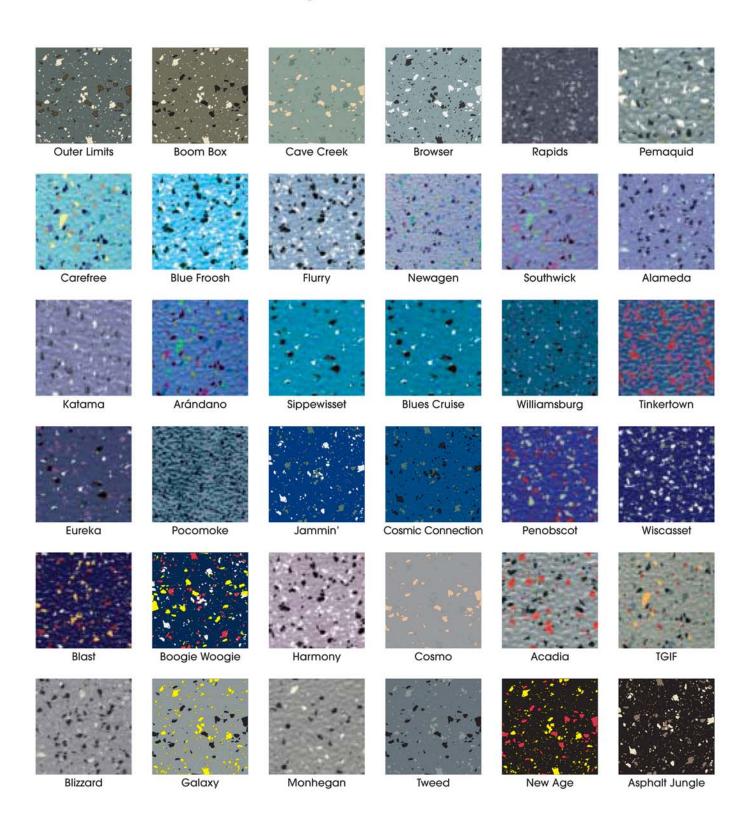

## **SpectraSolids**



## **Stair Treads**



Vista Detention Center, Vista, California



Endura One-Step™ Single-Piece Stair Tread

#### NEW!

Endura One-Step™ Single-Piece Stair Tread Endura's One-Step™ single-piece stair tread speeds installation, reduces maintenance and provides a uniform, seamless and contoured look. One-Step automatically adjusts for stair tread depths from 9.5 inches to over 13 inches, as well as for varying riser heights. Available in Endura's Sculptured pattern only.

Endura stair treads are designed to withstand heavy traffic, reduce noise, provide sure-footed slip-resistance and feature the same no-wax maintenance as Endura tiles. Unlike other stair treads, Endura stair treads do not require expensive nose caulking compound. Endura stair treads come with fully-sanded backs to promote secure adhesive bonding to stair steps. Endura treads, risers, cove base and accessories are designed to be part of a complete color-coordinated system. Endura is the only U.S.-based manufacturer to provide a stair tread warranty against both excessive wear for 10 years and against breakage at the stair tread nose (the most common point of stair tread failure) for five years (see Endura stair tread warranty for details).

Endura stair treads are available in Round, Square, Diamond, Safety and One-Step™ Sculptured patterns (see page 7 for colors and availability). Endura's Visual Alert safety feature complies with California Disabled Access Regulations Title 24 and is available in five contrasting color abrasive strips including black, beige, white, safety yellow and dark gray. The Visual Alert safety feature is available on each Endura stair tread pattern. Endura Round, Square and One-Step Sculptured pattern stair treads are available in lengths from 48" to 72" in 6" increments and in custom lengths. Diamond and Safety stair treads are available in 48" lengths only.

#### **PATTERNS**

Lengths: 4' to 6' in 6" increments



Length: 4'

#### **Accessories**

Endura offers a complete coordinated line of accessories, including stair nosing, riser and cove base.

Nosing .

Length: 12' (3.66M) Height: 2.0" (50.8mm)

Recommended in place of stair treads on landings for a cleaner, more streamlined look.

Riser

Lengths: 48" (1.22M) and 72" (1.83 M)


Height: 7" (178mm) Thickness: .125" (3.2mm)

Cove Base

Length: 48" (1.22M) Height: 4" (101.6mm) Thickness: .125" (3.2mm)

Coiled, straight, butt toe and 6" height base

are also available on special order. -



#### **Adhesives**

Endura adhesives are essential for a successful Endura installation. All Endura adhesives are solvent-free and non-flammable. Use of Endura adhesives is required for Endura warranties to remain in effect. Complete installation information is available from Endura and Endura distributors.

*Endurabond* 700<sup>™</sup> *Epoxy Adhesive* Specially formulated to be compatible with Endura's rubber compound, it is resistant to high-impact fractures and topical moisture.

Endurathane 600™ Urethane Adhesive Will cure at subfloor temperatures to 50°F (7°C) and can be used where traces of old asphalt adhesive remain in slab pores.

Endura 118™ Stair Tread Adhesive Modified acrylic aqueous-based stair tread adhesive with a drying time of approximately 30 minutes at normal room temperatures and humidity levels. For use in installing Endura rubber stair treads and risers.

#### Endura Insta-Step<sup>TM</sup> Installation Tape System

A fast, easy, cost-effective and permanent alternative to Endura's standard stair tread adhesive. Use with Endura stair treads, nosings, riser and landing tiles in areas requiring immediate walk-on or where odor-sensitivity presents a challenge. VOC-free and odorless, Insta-Step reduces stair tread installation time and costs.



## **Maintenance**

Built-in migrating waxes in Endura tiles and stair treads produce a beautiful natural luster. Endura requires no waxing, topcoating or stripping and none is recommended. Oil, grease and other spills are easily removed without the use of harsh chemicals. Endura offers a complete self-mixing detergent dispenser system for controlled dilution mixing and excellent cost control.


Endura products can best be maintained by using a deck brush or automatic scrubber and a neutral pH (7 to 8) detergent. Let the solution work for three to five minutes, then vacuum or mop up and let air dry. For an outstanding luster, dry buff. Full maintenance instructions are included with every Endura product. They are also available on Endura's website (www.endura-flooring.com) or from Endura and its distributors.

## **Special Products**



#### Endura EcoScore™ Athletic Tile\*

Ecoscore is designed for multifunctional use in athletic facilities. Its two-ply construction consists of a 1/8" wear layer of 100% virgin rubber vulcanized to 1/4" performance layer of post-consumer recycled rubber and meets LEED™ requirements for recycled content. EcoScore is durable, has a cushioned antifatigue feel, reduces noise and provides excellent ball-bounce and impact-resistance. Its Sculptured, no-wax, abrasion-resistant surface is also highly slip-resistant. EcoScore 24" x 24" tiles are available in Square (permanent) and Interlocking (temporary) styles. Colors include eight Solids, eight Flecksibles® and over 200 SpectraColors® (2,500 s.f. minimum). Custom EcoScore logos and designs are also available.





#### Endura SRT® Spike & Skate Resistant Tile\*

SRT withstands wear caused by spike and cleated athletic footwear and skate blades. It does not rip like carpeting or crumble or retain odors like recycled products.



#### Endura OGR® Oil & Grease Resistant Tile\*

OGR resists petroleum-based oil and grease and is used extensively in oil change and automotive facilities to improve safety and comfort. No Endura product should be used in commercial kitchens or in areas where exposure to cooking oils, vegetable fats, etc. is likely to occur.


Endura UV® Ultra-Violet Light Resistant Tile\* Endura's UV formulation reduces the impact of ultra-violet rays on Endura products exposed to direct sunlight. Minimums apply.

**Endura FR® Fire Retardant Tile\*** Endura's FR formulation increases the fire retardance of Endura to a Class A rating when tested in accordance with the ASTM E-84 fire test. *Minimums apply*.

\*Endura EcoScore, Endura SRT, Endura OGR, Endura FR and Endura UV are covered by the terms of Endura's standard warranties. Additional warranty provisions and limitations for each of these products may also apply. Contact Endura for details.

## **Logos and Designs**











# **Specifications**

#### Architectural Specifications-Short Form

Complete long form or short form specifications are available at www.endura-flooring.com.

Rubber Floor Tile All Endura Rubber Floor tile [specify: solid color, Flecksibles multi-color or SpectraColor (subject to stated minimums)] shown on the finish schedule or otherwise listed shall be furnished by Endura Rubber Flooring, a division of Burke Industries. All Endura Rubber Flooring products shall meet ASTM F-1344, ADA slip-resistance recommendations and all other requirements as indicated in Endura literature. All Endura rubber solid color floor tile shall be [specify: Round, Square, Sculptured, Domino, Bison, High-Square, High-Round] and/or Flecksibles [specify: Sculptured, SimplySmooth or Square] pattern.

Rubber Stair Treads and Riser Tile All Endura Rubber Stair Treads [specify: solid color, Flecksibles multi-color or SpectraColor (subject to stated minimums] shown on the finish schedule or otherwise listed shall be furnished by Endura Rubber Flooring, a division of Burke Industries. All Endura Rubber Stair Treads shall meet ASTM F-2169, ADA slip-resistance recommendations and all other requirements as indicated in Endura literature. All Endura solid color stair treads shall be [specify: Round, Square, Diamond, Safety, One-Step] [specify: with, without] optional Visual Alert safety feature and/or Flecksibles [specify: Square or One-Step] pattern with [specify: Round or Square in 48", 54", 60", 66" or 72" lengths] or Diamond or Safety [specify: 48"] tread lengths.

Cove Base All Endura Cove Base shown on the finish schedule or otherwise listed shall be furnished by Endura Rubber Flooring, a division of Burke Industries. All Endura Cove Base shall meet ASTM F-1861; Type TP, Group 1, Style B. All Endura Cove Base shall be 4" height by 48" lengths with toe for application over resilient tile and/or carpet. Colors shall be [specify: standard color or SpectraColor (subject to stated minimums)].

## **Environment**

In keeping with Endura's policy to protect our natural resources, all Endura products are environmentally safe and are manufactured with high quality components to minimize waste and the need for disposal. If Endura products need to be removed for any reason, depending upon local landfill policies and regulations, they can be easily disposed of at landfills. In contrast to many other flooring materials, from raw materials to production to installation to disposal, Endura products contain no harmful substances, such as halogens, formaldehyde, asbestos and CFCs, and remain inert. Whatever disposal methods are used, they should be in compliance with local, state and federal regulations and practices.

# More @ www.endura-flooring.com

- · Colors
- · Color Swatch Downloads
- · Surface Patterns
- CSI-Format Specifications
- Literature Downloads
- · Questionable Applications
- · Job References/Photographs by Market
- Life-Cycle Cost Comparisons
- · Sample and Information Requests
- · Warranties
- · Environmental Impact
- · New Products
- Maintenance Instructions
- · Installation Instructions
- ASTM Test Results









Burke Industries, Inc. 2250 South Tenth Street San Jose, CA 95112 800-447-8442

www.endura-flooring.com • info@endura-flooring.com











