



The surface finish is made of synthetic EPDM rubber with an "orange-peel" like finish for good grip and excellent durability. Logos, agility and functional zone markings can be in-laid in to the surface for maximum effectiveness and usability.



cardio areas, freestyle areas or suspension training activities.

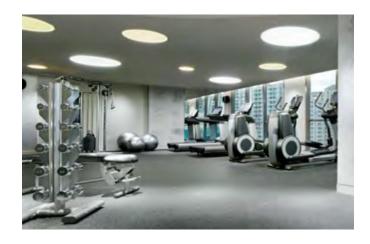

Specifications.





Property	Standard	Result
Thickness		8 - 30 mm
Size		1000 mm x 1000 mm
Shore Hardness	ASTM D 2240	60°
Resilience	DIN 18032-2	40%
Tear Strength Top Layer	ASTM D 624	0.91 MPa
Tear Strength Base Layer	ASTM D 624	0.70 MPa
Taber Abrasion	ASTM C 504	0.66 gr
Remaining Indentation	DIN 53960	0.05 mm
Flammability	EN 13501-1	C _{ii} -s1
Coefficient of Friction	ASTM D 2047-97	Dry: 1.03 Wet: 0.97

All in one, easily installed format.

Neoflex™ Natural Series REPtiles are supplied in 1m x 1m tiles, that are easy to install.







with graphics



WWW.REPHOUSE.COM




NTRL 1002






NTRL 1003

NTRL 1004










NTRL 1005


NTRL 1006 NTRL 1007

NTRL 1008











NTRL 1009

NTRL 1010

NTRL 1011

NTRL 1012









NTRL 1015

NTRL 1016