

↑ SPA & PALMS BALLROOM ↑

SafeScape® T2000

Fire Rating

Max Width

Max Height

180 minutes

18 metres


UNLIMITED

SafeScape® T2000 Series



A vertical coiling fire and smoke rated door system that incorporates either one or two deployable complying egress swing doors. Flush mounted in an adjacent wall, these complying egress swing doors deploy and lock into position at the command of an alarm condition. Once in place the integral egress doors and frames serve as side guides to accommodate the 3-hour roll down door assembly that descends at a governed rate.

Within seconds a 3-hour opening protective with single or dual egress swing doors stands ready to stop fire and smoke.

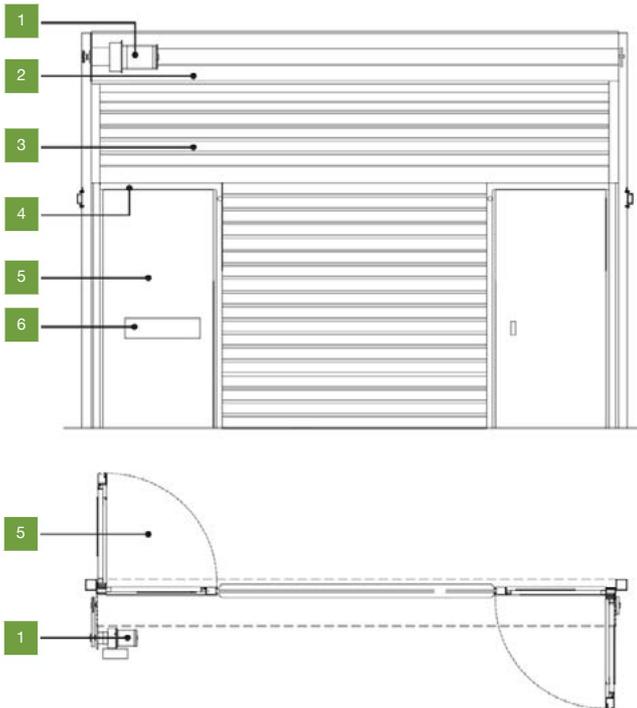

- | | | | |
|---|--------------------------|---|-----------------------|
| 1 | Fire Door Motor Operator | 4 | Door Closer |
| 2 | Hood | 5 | Swinging Egress Doors |
| 3 | Curtain Slats | 6 | Fire Exit Hardware |

Ratings

3-hour rated to UL 10B
 90-minute rated assembly with a 340°C over 30 minute Temperature Rise rating when required
 Smoke & Draft labeled UL 1784

Egress

Available with up to 2 complying egress swing doors. Doors at concealed at 90° or 180° to the door in the adjacent wall.

Egress doors only swing in one direction.
 Maximum swing door width is 1220mm

Finishes

McKeon Sterling Gray
 Powdercoated to RAL colour
 Stainless steel


Model	Open	Self-Close	Egress
T2000	Auto-Set® Operator	Fail-Safe Mechanical	1 Complying Swing Door
T2500	Auto-Set® Operator	Fail-Safe Mechanical	2 Complying Swing Doors

Benefits

- Compliant swing egress doors
- Compact side pocket space and compact overhead requirements
- Robust and durable construction can be used for frequent use
- Removes the requirement for fixed construction fire doors

Operation

Auto-Set® automatic resetting
 Fail-Safe Design - automatic self-closing mechanism does not require power operation



(02) 9526 3100