

**NEW IMPROVED!**



# TITAN

## SERIES

ML-TN20x2  
neutral white

ML-TN40x2  
neutral white

**20W**  
TN20x2

**41W**  
TN40x2

**120°**  
BEAM ANGLE

**40,000**  
HRS LIFE

**3**  
YEARS WARRANTY

The NEW tough Titan range has been overhauled and now features a slimline body, full opaque diffuser and quicker installation time.

Now available in standard, microwave and emergency models.

Featuring a **smarter microwave** sensor with both time and sensitivity adjustments, the new TITAN fittings also include 'standby' mode which reduces the output when no movement is being detected. This allows for areas to remain partially illuminated and safe while consuming minimal power (from 41W down to as little as 6W). This sensor is uniquely designed for M-Elec's TITAN range.

**UP TO 50% ENERGY SAVINGS\***

**REDUCED PRICE POINT**


**EASY INSTALLATION**

Technical Information	ML-TN20x2	ML-TN40x2
Total power consumed:	20W**	41W**
Lumen output:	2100lm	4000lm
Colour temperature:	4000K	4000K
IP rating:	IP65	IP65
CRI:	70+	70+
Efficacy:	105lm/W	97lm/W
Beam angle:	120	120
Dimmable:	No	No
Power Supply:	240V AC	240V AC
Average life:	40,000 hrs***	40,000 hrs***
Warranty:	3 years (4 years for PLI)	3 years (4 years for PLI)
Materials (diffuser and body):	Polycarbonate	Polycarbonate
Operating temperature:	-25°C to +55°C	-25°C to +55°C
Length   Width   Height	668 mm   150 mm   95 mm	1268 mm   150 mm   95 mm

\*\* Total power consumed including driver  
\*\*\*Average life of LED driver

Options: Dali driver, vandal proof clips

\*Energy savings by switching from fluorescent to LED.

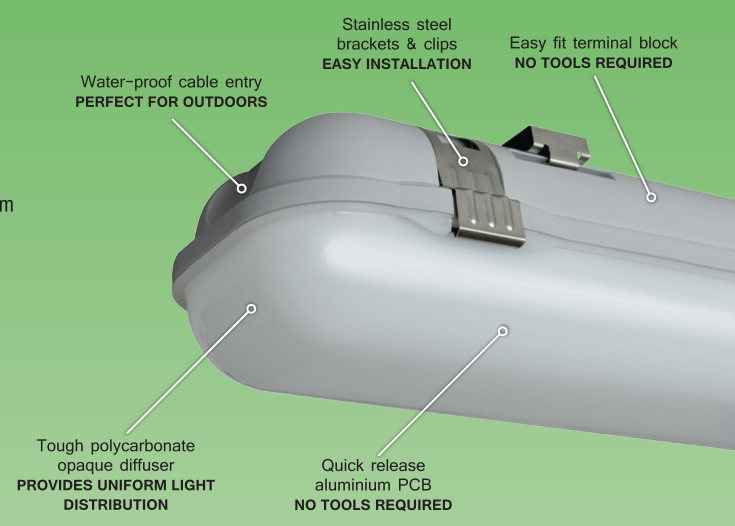

DESIGN // FUNCTION // TRUST  
phone: 1300 222 445 | www.melec.com.au