
Rinnai

Collectors have highly selective surfaces

Minimised heat loss and maximise efficiency

Manufactured in Australia for our varying conditions

Electric Boosted Solar

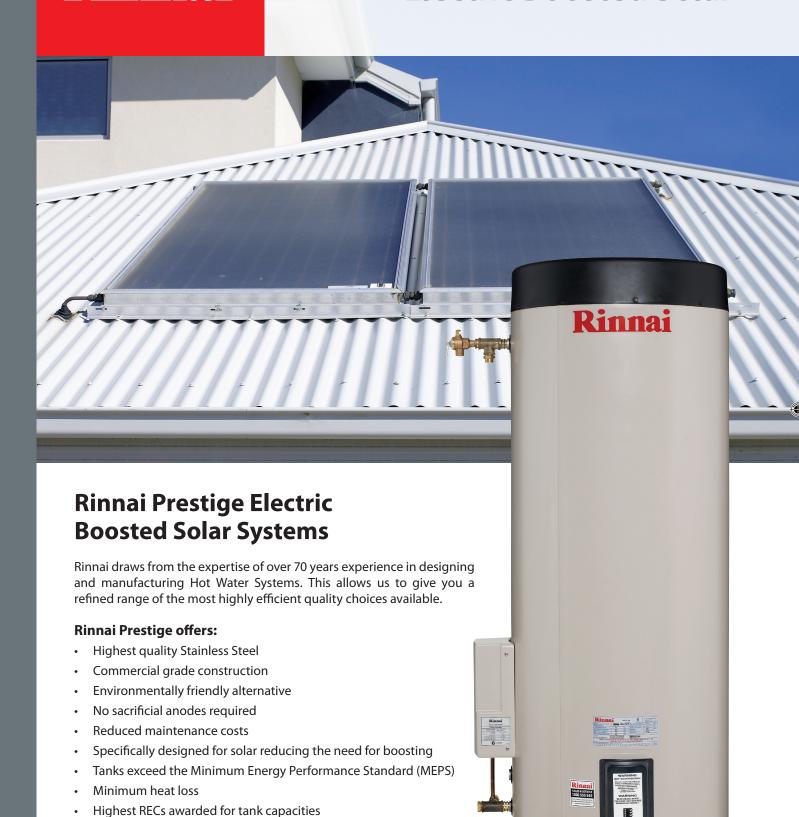



Rinnai

Rinnai Electric Solar Hot Water Systems

Close Coupled Systems

A close coupled system is where the Storage Cylinder and the Solar Collectors are coupled together and the installation is on the roof.

Rinnai Close Coupled Solar System use a thermo-syphoning principle (i.e. hot water rises because it is less dense) to circulate the water through the Collectors and then to the Storage Cylinder without the need for a pump.

Supplementary heating from the electric element will generally turn on overnight to bring the water up to temperature if insufficient heat is available from the sun (such as during cloudy or rainy weather or during winter months).

Features

- · Low heat loss due to greater insulation
- · Supplied standard in Titanium colour
- Wide range of Colorbond® colours available including Silver Prestige. Ask your Rinnai Solar consultant for the full colour selection





Benefits

- Technically very efficient, economical to install and low maintenance
- No recirculating pumps and pipe runs reducing heat losses and improving running efficiencies
- No electricity required to operate pumps to recirculate the water through the collectors
- Space saving in that it eliminates the need for a storage tank at ground level ideal for courtyard homes or small blocks

Split Systems

A split system is where the Storage Cylinder and the Solar Collectors are split and installed separately.

A solar control unit ensures the water circulates via a pump between the Solar Collectors and the Storage Cylinder. This transfers heat from the Collectors to the water in the cylinder if enough heat is available from the sun. The electric element will boost the water stored in the Cylinder overnight if necessary.

Features

- Rinnai Prestige improved insulation levels
- Streamlined appearance minimal impact on the aesthetics of your roofline with only the Collectors visible

Benefits

- Easy installation on roofs
- Split Systems do not require reinforcement of the roof structure, as the weight associated with water storage is at ground level
- Split System Cylinder can be installed internally or externally
- Collectors and the Cylinder do not need to be installed at the same time
- Ideal system for construction of new homes and major renovations







Solar Collectors

Excelsior Solar Collectors

- Highly efficient all copper Collector with a selective surface maximising energy from the sun
- 10 Riser tubes per panel for effective transfer of the solar energy to heat the water
- · Full aluminium casing for corrosion resistance
- Also available in a Frost Tolerant (FTC)

E-Frost Solar Collectors

- Exclusive Rinnai patented technology delivering true protection against frost and freezing
- Suitable and warranted for operating temperatures down to -12°C
- · Designed for Rinnai Split System solar hot water heaters
 - not compatible with Close Coupled Systems
- Mandatory installation required by Post Code in NSW,
 VIC & ACT. Ask your Rinnai Solar Specialist or see rinnai.com.au





Solar Rebates

 $^{\scriptsize{\scriptsize{\scriptsize{\scriptsize{\scriptsize{\scriptsize{\scriptsize{\scriptsize{\scriptsize{\scriptsize{}}}}}}}}}}}$

REC's and Rinnai Solar Systems

Rinnai offer the following popular combinations however if your particular system is not shown, please ask your Rinnai Solar Specialist who can further advise.

Rinnai Prestige Electric Solar Systems		Cylinder Electric Size Booster	Electric Booster	No of Collectors	RECs Zones Excelsior & Excelsior FTC Collectors				RECs Zones E-Frost Collectors			
Electric Solar S	ystems	Size	booster	Collectors	1	2	3	4	1	2	3 30 29 33	4
Split System Electric	System F	250L	3.6kW	2	32	31	32	26	30	29	30	25 (1)
	System G	315L	3.6kW	2	32	31	32	26	29	29	29	24 ⁽¹⁾
	System H	315L	3.6kW	3	35	33	35	30	33	32	33	29
Close Coupled Electric	System I	180L	3.6kW	1	21	21	21	17 (1) (2)	Not available for use with Close Coupled Systems			
	System J	330L	2.4kW	2	35	33	35	30				
	System K	330L	3.6kW	2	35	33	35	30				

(1) Not suitable for Victorian 5 Star homes (3 or more bedroom criteria). (2) Not eligible for Federal Government Electric to Solar Rebate Scheme

Government Rebates

The Australian Greenhouse Office awards Renewable Energy Certificates (RECs) according to how much energy each Rinnai Solar system saves compared with a conventional electric water heater. The Federal Government legislation states that RECs are applicable when a solar system is installed in a new home or replaces an existing hot water system.



You may also be eligible for State Government rebates. To assist with the eligibility and calculation of rebates, we have produced an online calculator. Simply go to www.rinnai.com.au and click on the Solar Rebate Estimator icon.



The Environment

Gas is one of the most greenhouse friendly fuel sources available. By choosing a Rinnai gas boosted Solar System you can make a difference! Gas Boosted Solar hot water has substantial benefits and assists with the reduction of our carbon footprint. Solar systems are awarded Renewable Energy Certificates (RECs) based on measured environmental savings. Even electric boosted systems show considerable savings and are highly awarded RECs. Rinnai systems lead the way being amongst the highest in the industry.



Rinnai also offer Gas boosting as an alternative to Electric Systems. LPG boosters are available in area's where Natural Gas is not available. Ask your Rinnai Solar Specialist about the benefits of a Gas boosted system.

Solar Hot Water Warranty		Continuous Flow Models S20 and models convert	mpatible w Water Heaters d S26 and other ed by Rinnai for cations ^{(1) (3)}	Storage Cylinder Prestige Stainless Steel Range	Solar Collectors Excelsior & E-Frost	Components (2) (5)	
		Heat Exchanger	All other components				
Domestic	Parts	10 Years	3 Years ⁽⁴⁾	10 Years	7 Years	1 Year (4) (5)	
Use	Labour	3 Years	3 Years	3 Years	1 Year	1 Year	
Commercial Use	Parts	5 Years	1 Year	5 Years	5 years	1 Year	
	Labour	1 Year	1 Year	1 Year	1 Year	1 Year	

⁽¹⁾ The continuous flow models in this column are suitable only for solar hot water applications. Any failure or service issue when installed in a non solar hot water application is not covered by warranty. (2) Components include pumps, system controllers, sensors, thermostats, valves, electric heating elements and anodes where applicable. (3) Some other models can be converted for solar applications by Rinnai by order request. (4) For Victorian installations only - 5 year warranty on the solar circulating pump, solar controller and components within the continuous flow water heater in order to comply with State legislation where applicable. (5) For Queensland installations only - 2 Year warranty on the solar circulating pump in order to comply with State legislation where applicable.

Please note:

For full definitions of Domestic and Commercial use, along with the full conditions and exclusions, please refer to **www.rinnai.com.au** Rinnai Australia Pty Ltd reserves the right to make modifications and change specifications without notice.



RINNAI AUSTRALIA PTY. LTD

ABN 74 005 138 769

10-11 Walker Street Braeside VIC 3195 For further information visit www.rinnai.com.au or call 1300 555 545

Deal	ler	De	ta	ils

