



Karndean
Designflooring



Karndean
LooseLay


Karndean LooseLay
Commercial



Karndean LooseLay gives you intricate designs and durability in a format that can be installed quickly and easily in any space.

Its friction grip backing secures the flooring firmly in place, making it a preferred alternative to carpet tiles and other flooring tiles.

Karndean LooseLay is 4.5mm thick with a 0.5mm wear layer.

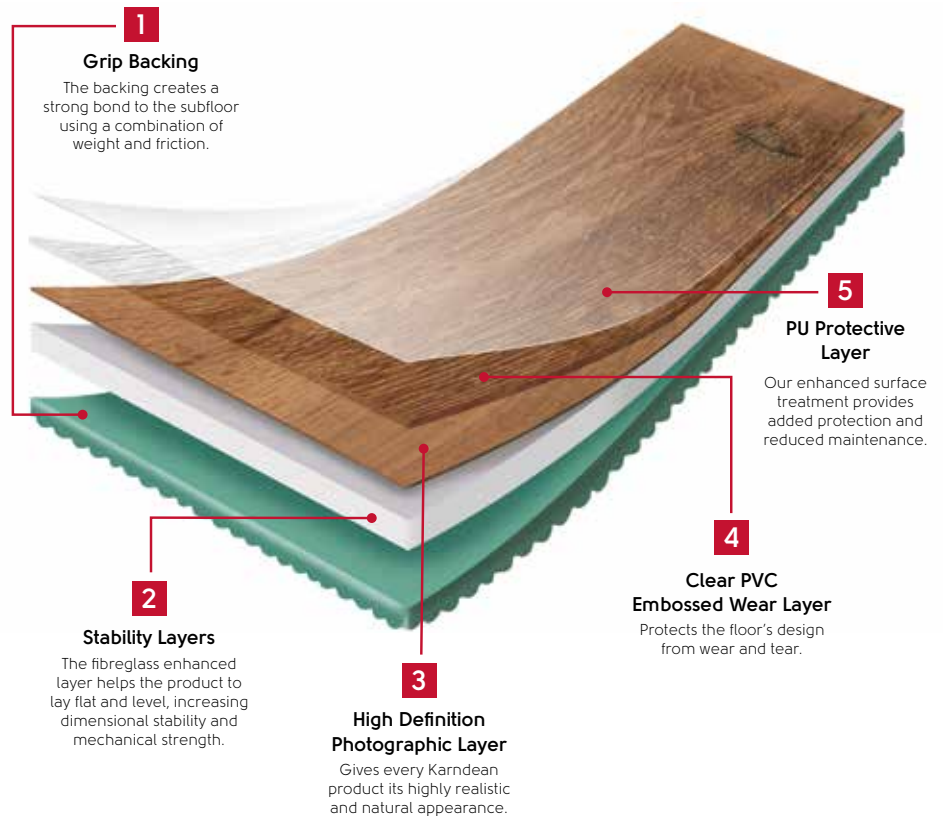

Why Karndean LooseLay?



Retail

With the highest abrasion wear rating (Group T) and availability in a wide range of colours and designs, you can create interesting retail flooring designs that are not only stylish, but also durable to withstand heavy footfall.

Multi-Res Buildings

Karndean LooseLay's wave backing reduces noise transmission and therefore does not require a separate acoustic underlay reducing installation time as well as cost.

It also conforms to the Building Code of Australia for multi-residential dwellings as per ISO140-6.



Offices

Karndean LooseLay is an ideal option for office flooring, creating a space that's comfortable, inspiring and practical. It can also be used where access is required to in-floor electricity and network cables.

Health & Aged Care

Karndean LooseLay is an excellent solution for busy health and aged care environments where cleanliness and durability are of paramount importance. It is softer under foot than many hard floors, providing a more comfortable and quieter environment for residents.



LLT206

Education

Karndean LooseLay's durability and ease of maintenance makes it an appealing, resilient and pragmatic solution for universities, colleges, schools and community centres. Its acoustic properties make it a good choice for music rooms.



LLP109

Leisure & Hospitality

Karndean LooseLay is a versatile, well-established and proven choice for the demands of gyms, hotels, restaurants and leisure facilities where the look, resilience and ease of keeping floors clean is vital.



Acoustic qualities

Karndean LooseLay is perfect for projects where you want to reduce noise levels such as multi-res buildings, retail, office and education environments.



Comfortable underfoot

Our products are softer and warmer underfoot than natural wood and stone flooring. With additional cushioning in the backing, Karndean LooseLay is ideal for commercial settings where staff are constantly on their feet.



Individually replaceable

Should you need to replace a piece, simply lift the damaged plank or tile and replace with a new one.



Quick & easy to install

All you need is a sound, smooth, dry and dust free subfloor. Karndean LooseLay can be fitted over most existing hard floors*.

* Adhesive may be required for some applications, please refer to installation instructions.



Durable

Karndean LooseLay is extremely hardwearing. Unlike real wood and stone, it won't splinter, warp or crack.



Low maintenance

We use PU technology to ensure that there is no need to apply an additional surface treatment following installation. It also works as a barrier against scuff marks, stains and fine scratches.



Realistic designs

Available in contemporary larger scale planks and tiles, Karndean LooseLay is available in a variety of colour tones and styles.



100% recyclable

Karndean LooseLay Wood

1050mm x 250mm (41.3" x 9.85")



Ashland LLP95 (Series Two) pg 16



Hudson LLP99 (Series Two) pg 16



Newport LLP94 (Series Two) pg 16



Stamford LLP109 (Series Three) pg 22



Country Oak VGW92T-7LLST (Series One) pg 10



Hartford LLP112 (Series Three) pg 22



Boston LLP111 (Series Three) pg 22



Burnt Ginger VG5-7LLST (Series One) pg 10



Merbau VGW91T-7LLST (Series One) pg 10



Cambridge LLP113 (Series Three) pg 22



Providence LLP108 (Series Three) pg 22



Tasmanian Wattle VGW38T-7LLST (Series One) pg 10



Winchester LLP97 (Series Two) pg 16



Antique Karri VGW39T-7LLST (Series One) pg 10



Copper Gum VGW33T-7LLST (Series One) pg 10



Burlington LLP110 (Series Three) pg 22



Salem LLP96 (Series Two) pg 16



Dover LLP93 (Series Two) pg 16

Karndean LooseLay Stone

500mm x 610mm (19.7" x 24")



Indiana LLT202 (Series One) pg 12



Georgia LLT206 (Series Two) pg 18



Colorado LLT201 (Series One) pg 12



Texas LLT207 (Series Two) pg 18



Arizona LLT200 (Series One) pg 12



Madison LLT203 (Series One) pg 12

Karndean LooseLay Textile

500mm x 610mm (19.7" x 24")



Pennsylvania LLT204 (Series Two) pg 18



Nevada LLT205 (Series Two) pg 18

Colour and Pattern Reproduction

We are careful to make sure our brochures are accurate and printed to very high standards, but photography and printing cannot always create a perfect representation of our products. For this reason we strongly recommend that you look at a sample of any product you are considering before placing your order.

All of our products are inspired by things we have seen in the natural world. Just as variation in colour and detail is part of the unique beauty of natural materials, it is also a feature of many of our designs. This means that with some of our products you will see natural variation when your floor is laid. If in doubt, ask your retailer to show you a larger sample of the product.

We love developing new ideas and improving on our existing designs. This does mean that sometimes products are withdrawn at short notice. We hate to disappoint, and will always try to work with you to find an alternative design that you love just as much.



was the student who
Robert Tindem was
General Foreman. Gene
Woolley was the best
friend for the job
the roof was finished
and the bell tower was
built in Baldwin just
at the entrance - finished
the building and set
the top with a crane
Gene Woolley drove all
the way signed and the
building of the tower
was a success by
the



Karndean LooseLay Series One

The first **Karndean LooseLay** series was inspired by trends seen in natural wood and stone products: distressed and rustic timbers, poured concrete and travertine tiles.

Featuring enhanced acoustic properties and excellent environmental credentials, **Karndean LooseLay** is quick and easy to install making it ideal when commercial downtime is an issue.

LLT203



VGW92T-7LLST Country Oak 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R10	12 planks/3.15m ²	Yes



VG5-7LLST Burnt Ginger 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R10	12 planks/3.15m ²	Yes



VGW33T-7LLST Copper Gum 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R10	12 planks/3.15m ²	Yes



VGW38T-7LLST Tasmanian Wattle 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R10	12 planks/3.15m ²	Yes



VGW39T-7LLST Antique Karri 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R10	12 planks/3.15m ²	Yes



VGW91T-7LLST Merbau 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R10	12 planks/3.15m ²	Yes

	Standard	Result
Thickness	4.5 mm	
Wear layer	0.5 mm	
Warranty	Commercial Residential	10 years wear* Limited Lifetime wear*
Bevelled edge	No	
Standards	EN 649 ASTM F1700	Pass Pass
Classification		Commercial heavy duty use Domestic heavy duty use
Reaction to fire	AS NZS ISO 9239.1:2003	Plank CRF: 8.0kW/m ² Tile 9.4 kW/m ² Smoke value: 105% min 164% min
Staining resistance	EN 423 ASTM F925	Class 0 Pass
Colour fastness to light	ISO 105-B02 ASTM F1515	≥7 <8
Abrasion resistance	EN 660-2 ASTM D3884	Group T Pass

Dimensional stability	EN 434 ASTM F2199	≤ 0.10% Pass
Electrical behaviour body voltage	EN 1815 AATCC 134-1996	Pass Pass
Slip resistance	AS/NZS 4586:2004	See individual product
Acoustic impact noise reduction	ISO 140-6 Normalized Impact Sound Insulation ISO 140-8 Improved Impact Sound Insulation ASTM E492-09 Impact Insulation Class	L _{n,w} (C1)59dB ΔL _w = 14dB IIC 56dB
	Suitable for use on upper floors of residential high-rise apartment buildings without the need for a separate acoustic underlay.	
Indentation - residual	EN 433 ASTM F1914	≤ 0.1 mm <8%
Castor chair continuous use	EN 425	Pass
Thermal conductivity	ISO 8302 Suitable for underfloor heating	0.0245 m ² K/W Max 27°C
Adhesive	Please refer to our installation instructions	
Recycling	Suitable	

* Full details of the terms and conditions of the Karndean LooseLay residential limited and commercial wear guarantees are available by contacting Karndean International.
Freecall: 1800 428 963 Fax: 1800 431 048 or Email: customerservice@karndean.com.au.



VGW92T-7LLST



VG5-7LLST



VGW91T-7LLST



LLT200 Arizona 500mm x 610mm (19.7" x 24")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R9	10 tiles/3.05m ²	Yes



LLT201 Colorado 500mm x 610mm (19.7" x 24")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R9	10 tiles/3.05m ²	Yes



LLT202 Indiana 500mm x 610mm (19.7" x 24")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R9	10 tiles/3.05m ²	Yes



LLT203 Madison 500mm x 610mm (19.7" x 24")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R9	10 tiles/3.05m ²	Yes



	Standard	Result
Thickness	4.5 mm	
Wear layer	0.5 mm	
Warranty	Commercial Residential	10 years wear* Limited Lifetime wear*
Bevelled edge	No	
Standards	EN 649 ASTM F1700	Pass Pass
Classification		Commercial heavy duty use Domestic heavy duty use
Reaction to fire	AS NZS ISO 9239.1:2003	Plank CRF: 8.0kW/m ² Tile 9.4 kW/m ² Smoke value: 105% min 164% min
Staining resistance	EN 423 ASTM F925	Class 0 Pass
Colour fastness to light	ISO 105-B02 ASTM F1515	≥7 <8
Abrasion resistance	EN 660-2 ASTM D3884	Group T Pass

Dimensional stability	EN 434 ASTM F2199	≤ 0.10% Pass
Electrical behaviour body voltage	EN 1815 AATCC 134-1996	Pass Pass
Slip resistance	AS/NZS 4586:2004	See individual product
Acoustic impact noise reduction	ISO 140-6 Normalized Impact Sound Insulation	L _{n,w} (C1)59dB
	ISO 140-8 Improved Impact Sound Insulation	ΔL _w = 14dB
	ASTM E492-09 Impact Insulation Class	IIC 56dB
	Suitable for use on upper floors of residential high-rise apartment buildings without the need for a separate acoustic underlay.	
Indentation - residual	EN 433 ASTM F1914	≤ 0.1 mm <8%
Castor chair continuous use	EN 425	Pass
Thermal conductivity	ISO 8302 Suitable for underfloor heating	0.0245 m ² K/W Max 27°C
Adhesive	Please refer to our installation instructions	
Recycling	Suitable	

* Full details of the terms and conditions of the Karndean LooseLay residential limited and commercial wear guarantees are available by contacting Karndean International.
Freecall: 1800 428 963 Fax: 1800 431 048 or Email: customerservice@karndean.com.au.



LLT203 & LLT201



LLT200



LLT202



LLT203



flowers

08446522

BLOOM OFFERS

TULIPS 2.99
ROSES 3.99
LILIES 5.00

FREE
DELIVERY



Karndean LooseLay Series Two

Our Series Two wood effect planks reflect the trend for delicate oaks, worn wood and distressed patterns, whilst our Series Two stone designs replicate the striking look of natural slate. The collection also includes two linear textile patterns for a distinct modern look.

Each **Karndean LooseLay** plank or tile is individually replaceable, making it easy and economical to repair.



LLP93 Dover 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R9	12 planks/3.15m ²	Yes



LLP94 Newport 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R9	12 planks/3.15m ²	Yes



LLP95 Ashland 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R9	12 planks/3.15m ²	Yes



LLP96 Salem 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R9	12 planks/3.15m ²	Yes



LLP97 Winchester 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R9	12 planks/3.15m ²	Yes



LLP99 Hudson 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R9	12 planks/3.15m ²	Yes

	Standard	Result
Thickness	4.5 mm	
Wear layer	0.5 mm	
Warranty	Commercial Residential	10 years wear* Limited Lifetime wear*
Bevelled edge	No	
Standards	EN 649 ASTM F1700	Pass Pass
Classification		Commercial heavy duty use Domestic heavy duty use
Reaction to fire	AS NZS ISO 9239.1:2003	Plank Tile
		CRF: 8.0kW/m ² 9.4 kW/m ²
		Smoke value: 105% min 164% min
Staining resistance	EN 423 ASTM F925	Class 0 Pass
Colour fastness to light	ISO 105-B02 ASTM F1515	≥7 <8
Abrasion resistance	EN 660-2 ASTM D3884	Group T Pass

Dimensional stability	EN 434 ASTM F2199	≤ 0.10% Pass
Electrical behaviour body voltage	EN 1815 AATCC 134-1996	Pass Pass
Slip resistance	AS/NZS 4586:2004	See individual product
Acoustic impact noise reduction	ISO 140-6 Normalized Impact Sound Insulation	L _{n,w} (C1)59dB
	ISO 140-8 Improved Impact Sound Insulation	ΔL _w = 14dB
	ASTM E492-09 Impact Insulation Class	IIC 56dB
	Suitable for use on upper floors of residential high-rise apartment buildings without the need for a separate acoustic underlay.	
Indentation - residual	EN 433 ASTM F1914	≤ 0.1 mm <8%
Castor chair continuous use	EN 425	Pass
Thermal conductivity	ISO 8302 Suitable for underfloor heating	0.0245 m ² K/W Max 27°C
Adhesive	Please refer to our installation instructions	
Recycling	Suitable	

* Full details of the terms and conditions of the Karndean LooseLay residential limited and commercial wear guarantees are available by contacting Karndean International.
Freecall: 1800 428 963 Fax: 1800 431 048 or Email: customerservice@karndean.com.au.



LLP93



LLP97



LLP95



LLP94



LLP96



LLP99



LLT204 Pennsylvania 500mm x 610mm (19.7" x 24")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R9	10 tiles/3.05m ²	Yes



LLT205 Nevada 500mm x 610mm (19.7" x 24")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R9	10 tiles/3.05m ²	Yes



LLT206 Georgia 500mm x 610mm (19.7" x 24")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R9	10 tiles/3.05m ²	Yes



LLT207 Texas 500mm x 610mm (19.7" x 24")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R9	10 tiles/3.05m ²	Yes



	Standard	Result
Thickness	4.5 mm	
Wear layer	0.5 mm	
Warranty	Commercial Residential	10 years wear* Limited Lifetime wear*
Bevelled edge	No	
Standards	EN 649 ASTM F1700	Pass Pass
Classification		Commercial heavy duty use Domestic heavy duty use
Reaction to fire	AS NZS ISO 9239.1:2003	Plank CRF: 8.0kW/m ² Tile 9.4 kW/m ² Smoke value: 105% min 164% min
Staining resistance	EN 423 ASTM F925	Class 0 Pass
Colour fastness to light	ISO 105-B02 ASTM F1515	≥7 <8
Abrasion resistance	EN 660-2 ASTM D3884	Group T Pass

Dimensional stability	EN 434 ASTM F2199	≤ 0.10% Pass
Electrical behaviour body voltage	EN 1815 AATCC 134-1996	Pass Pass
Slip resistance	AS/NZS 4586:2004	See individual product
Acoustic impact noise reduction	ISO 140-6 Normalized Impact Sound Insulation ISO 140-8 Improved Impact Sound Insulation ASTM E492-09 Impact Insulation Class	L _{n,w} (C1)59dB ΔL _w = 14dB IIC 56dB
		Suitable for use on upper floors of residential high-rise apartment buildings without the need for a separate acoustic underlay.
Indentation - residual	EN 433 ASTM F1914	≤ 0.1 mm <8%
Castor chair continuous use	EN 425	Pass
Thermal conductivity	ISO 8302 Suitable for underfloor heating	0.0245 m ² K/W Max 27°C
Adhesive	Please refer to our installation instructions	
Recycling	Suitable	

* Full details of the terms and conditions of the Karndean LooseLay residential limited and commercial wear guarantees are available by contacting Karndean International.
Freecall: 1800 428 963 Fax: 1800 431 048 or Email: customerservice@karndean.com.au.



LLT204



LLT206



LLT205



LLT207





new

Karndean LooseLay Series Three

Our Series Three collection includes popular pale and warm oak tones, fashionable rustics and deep greys. Available in large scale wood look planks, **Karndean LooseLay** is perfectly placed to work in almost any commercial space.

Its friction grip backing and increased dimensional stability secures the flooring firmly in place.

LLP111



LLP108 Providence 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R10	12 planks/3.15m ²	Yes



LLP109 Stamford 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R10	12 planks/3.15m ²	Yes



LLP110 Burlington 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R10	12 planks/3.15m ²	Yes



LLP111 Boston 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R10	12 planks/3.15m ²	Yes



LLP112 Hartford 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R10	12 planks/3.15m ²	Yes



LLP113 Cambridge 1050mm x 250mm (41.3" x 9.85")

Slip Resistance (Oil-Wet Ramp)	Box Quantity	K-Guard Plus
R10	12 planks/3.15m ²	Yes

	Standard	Result
Thickness	4.5 mm	
Wear layer	0.5 mm	
Warranty	Commercial Residential	10 years wear* Limited Lifetime wear*
Bevelled edge	No	
Standards	EN 649 ASTM F1700	Pass Pass
Classification		Commercial heavy duty use Domestic heavy duty use
Reaction to fire	AS NZS ISO 9239.1:2003	Plank Tile
Staining resistance	EN 423 ASTM F925	CRF: 8.0kW/m ² 105% min 9.4 kW/m ² 164% min
Colour fastness to light	ISO 105-B02 ASTM F1515	Smoke value: 105% min 164% min
Abrasion resistance	EN 660-2 ASTM D3884	Class 0 Pass
		Group T Pass

Dimensional stability	EN 434 ASTM F2199	≤ 0.10% Pass
Electrical behaviour body voltage	EN 1815 AATCC 134-1996	Pass Pass
Slip resistance	AS/NZS 4586:2004	See individual product
Acoustic impact noise reduction	ISO 140-6 Normalized Impact Sound Insulation ISO 140-8 Improved Impact Sound Insulation ASTM E492-09 Impact Insulation Class	L _{n,w} (C1)59dB ΔL _w = 14dB IIC 56dB
	Suitable for use on upper floors of residential high-rise apartment buildings without the need for a separate acoustic underlay.	
Indentation - residual	EN 433 ASTM F1914	≤ 0.1 mm <8%
Castor chair continuous use	EN 425	Pass
Thermal conductivity	ISO 8302 Suitable for underfloor heating	0.0245 m ² K/W Max 27°C
Adhesive	Please refer to our installation instructions	
Recycling	Suitable	

* Full details of the terms and conditions of the Karndean LooseLay residential limited and commercial wear guarantees are available by contacting Karndean International.
Freecall: 1800 428 963 Fax: 1800 431 048 or Email: customerservice@karndean.com.au.



LLP109



LLP113



LLP112



LLP111



LLP112



LLP110



Useful information when installing Karndean LooseLay

Acclimatisation

At least 48 hours prior to installation, **Karndean LooseLay** must be removed from packaging, unstacked and allowed to acclimatise in the room where the installation is to take place. Room temperature should be kept between 18°C - 29°C (65°F - 85°F).

Subfloor Preparation

Subfloor preparation must comply with ASTM F710, AS/NZS 1884, BS 8203, DTU 53.2, DIN 18365 (Teil C) or other applicable National Standards and Building Codes for the installation of Resilient Flooring.

Installation

Before starting the installation remove all debris or dust and clean the floor. **Karndean LooseLay** can be installed on any subfloor that is flat, level, smooth and dry using one of the following three options:

1. Loose lay – fitted 'tightly' to the wall and each other using a suitable tackifier or pressure sensitive adhesive around the edge of the room and at thresholds.
2. Grid stick – in rooms with walls longer than 4 metres (13 feet) use a suitable tackifier or pressure sensitive adhesive around the edge of the room and at intervals across the floor in a grid pattern, again fitting **Karndean LooseLay** tightly to the wall and each other.
3. Heavy traffic / high temperature areas – we recommend installing **Karndean LooseLay** with a full coverage of Karndean Hi-Tack adhesive.

Routine Maintenance

Karndean LooseLay has a protective PU surface, which helps to protect the floor and eliminates the need to strip and seal after installation.

Regular cleaning with a pH neutral cleaner such as Karndean Clean will help keep your floor at its best.

To refresh the appearance and durability of your floor, strip the floor using the Karndean Remove solution, rinse the floor with water and seal, using the Karndean Refresh sealer.

Repair

Karndean LooseLay is not only quick and easy to fit, but in a situation where you may need to replace a damaged plank or tile, it's just as easy to replace a piece as it is to fit in the first place.



LLP111



VGW92T-7LLST

Visit us online at www.karndean.com, where you can...

View the entire range of **Karndean Designflooring**

- Browse floors by wood or stone effect – filtering by size, range and colour
- Look at product specifications – including areas of application, slip resistance ratings, sizes and features
- Find tools and resources to help you choose the right floor
- Order brochures and samples

Download the Product Selector App

- The free Product Selector App for iPad showcases more than 150 wood and stone designs from our product portfolio including full technical specifications
- Search 'Karndean Product Selector' on the App Store

Keep up-to-date with us:

- Follow us on Twitter @karndeancomm
- Sign up for our e-newsletter at www.karndean.com



Karndean LooseLay Commercial

For commercial samples, literature,
sales support and technical information call
AUS: 1800 810 920 or NZ: 0800 442 101.

Visit the **Karndean Designflooring** website at www.karndean.com/looselay
to view the full product range, download data sheets, read
case studies and request samples.

Karndean Designflooring, 835 Stud Road Knoxfield, Victoria 3180.

www.karndean.com

