



## Auto-Set® FSFD-TR

Fire Rating

Max Width

Max Height

240 minutes


24 metres

UNLIMITED

# Auto-Set® FSFD-TR

The Auto-Set® Model FSFD-TR is designed for use in areas where a Temperature Rise rating in addition to standard fire ratings is required. Available with up to a 230°C over 30 minute Temperature Rise rating when required, it meets building code requirements for fire doors used in exit enclosures and exit passageways on non-sprinkled buildings.

Openings in rated walls requiring temperature rise ratings are no longer limited to standard swing door dimensions when protected by the Model FSFD-TR, meaning greater design flexibility.

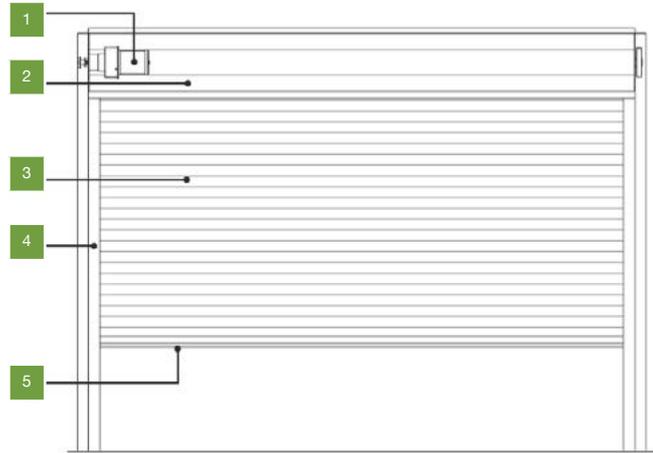

- 1 Fire Door Motor Operator
- 2 Hood
- 3 Curtain Slats
- 4 Guides
- 5 Bottom Bar

### Ratings


Up to 4- Hour rated UL 10B  
 Available with a 450° F over 30 minute temperature Rise rating when required  
 Smoke & Draft labeled UL 1784

### Egress

Not applicable

### Finishes

McKeon Sterling Gray  
 Powder coat  
 Stainless steel

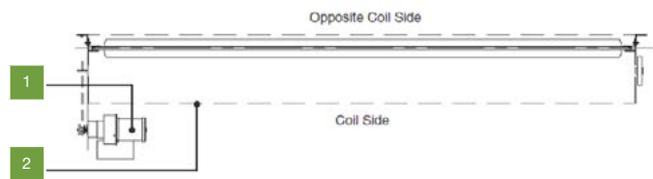

Model	Open	Self-Close	Egress	Function
FSFD-TR	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Temperature Rise Fire Door

## Benefits

- Maximum temperature rise of 230°C after 30 minutes
- Large over-size openings with fire rating up to 4 hours
- Ease of testing and reset with Auto-Set®
- Reduced ongoing maintenance costs
- Robust and durable
- Can be operated numerous times daily
- Can be used as a security shutter

## Operation

Auto-Set® automatic resetting  
 Fail-Safe Design - automatic self-closing mechanism does not require power operation  
 Based upon door size, available with hand-chain or hand-crank operation

