

1. Silkline Profile
2. Flat Profile
3. Mesa Profile

## External Walls & Facade Panel Profiles

### Panel Widths /

All facade profiles except for Metric are available in a standard width of 1200mm module. Metric Profiles are available in a standard width of 1000mm module. Variable panel widths between 600mm and 1200mm are available upon request (Subject to a minimum order quantity).

### Panel Lengths /

All panels are manufactured to length +/- 5mm, as determined by handling, design and transportation up to a maximum of 25 meters.


### Panel Thicknesses /

Standard thicknesses available range from 50mm to 250mm in multiples of 25mm.


Variable panel thicknesses are available upon request subject to minimum order quantity.



4

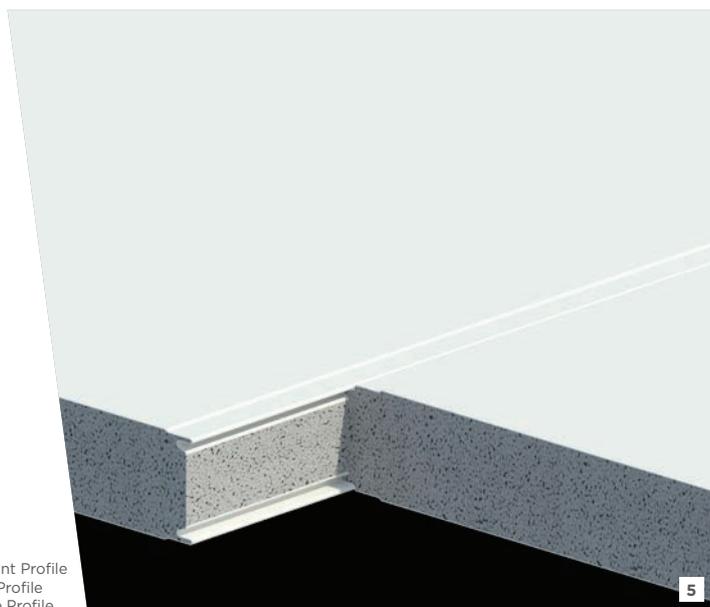

5

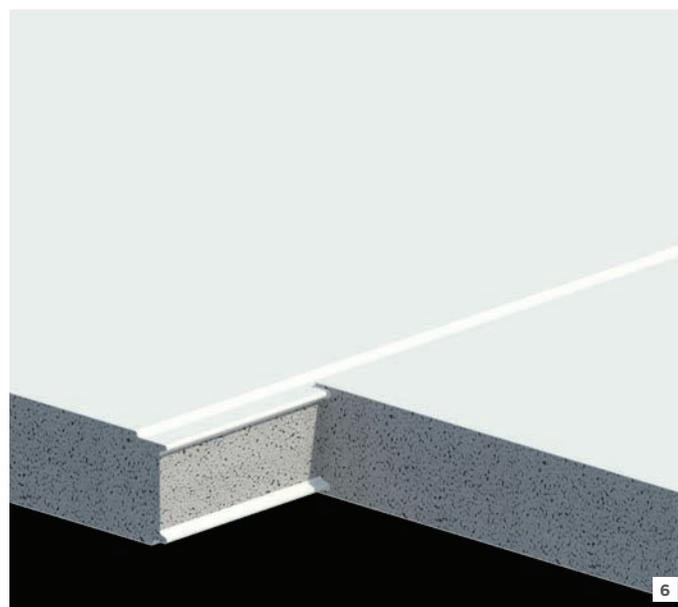

6

- 4. Express Joint Profile
- 5. Australine Profile
- 6. Shadowline Profile

## External Walls & Facade Panel Profiles

### Panel Widths /

All facade profiles except for Metric are available in a standard width of 1200mm module. Metric Profiles are available in a standard width of 1000mm module. Variable panel widths between 600mm and 1200mm are available upon request (Subject to a minimum order quantity).


### Panel Lengths /

All panels are manufactured to length +/- 5mm, as determined by handling, design and transportation up to a maximum of 25 meters.


### Panel Thicknesses /

Standard thicknesses available range from 50mm to 250mm in multiples of 25mm.


Variable panel thicknesses are available upon request subject to minimum order quantity.

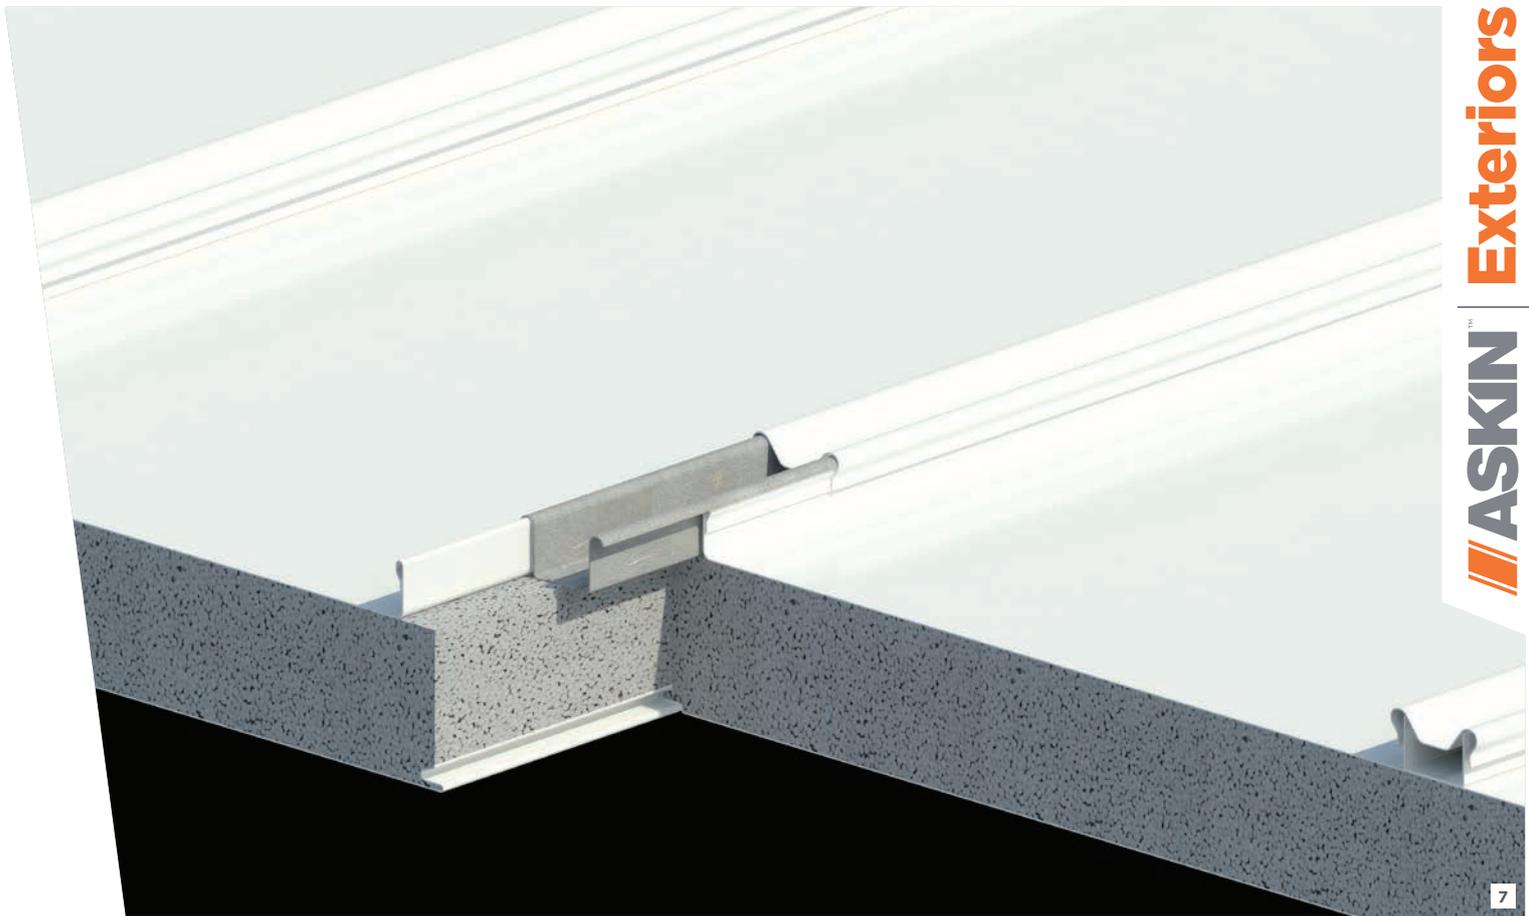

7

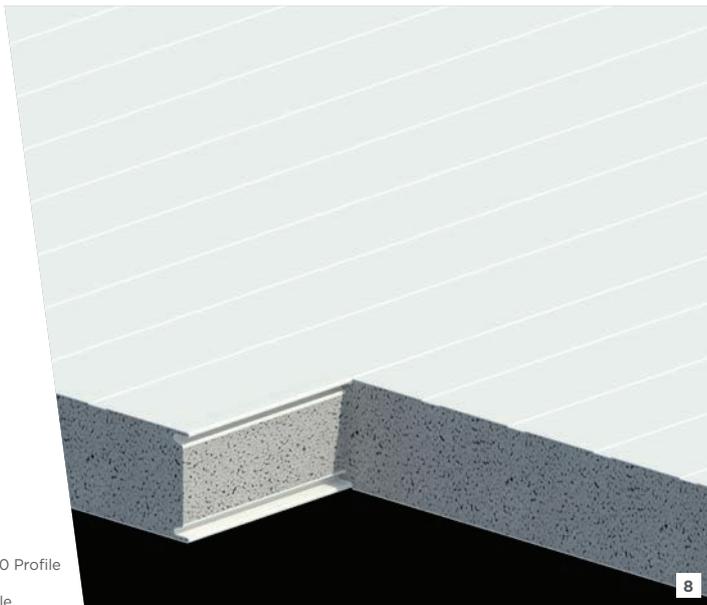

8

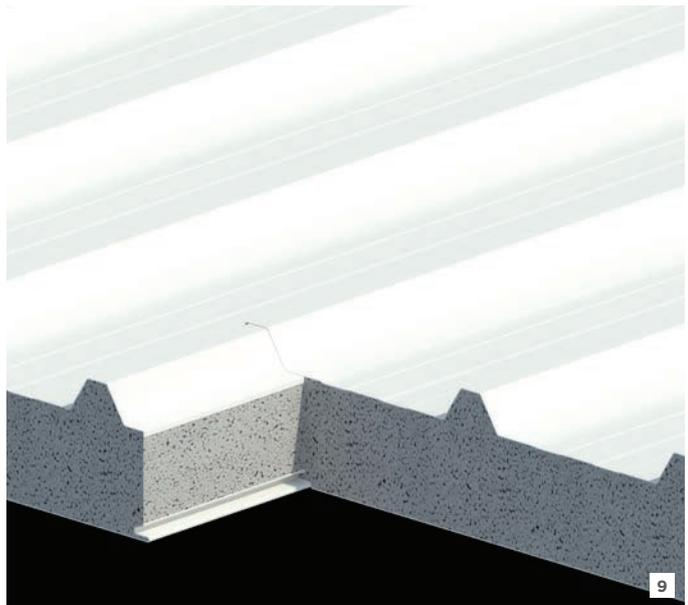

9

7. Unideck 600 Profile  
8. Rib Profile  
9. Metric Profile

## External Walls & Facade Panel Profiles

### Panel Widths /

All facade profiles except for Metric are available in a standard width of 1200mm module. Metric Profiles are available in a standard width of 1000mm module. Variable panel widths between 600mm and 1200mm are available upon request (Subject to a minimum order quantity).

### Panel Lengths /

All panels are manufactured to length +/- 5mm, as determined by handling, design and transportation up to a maximum of 25 meters.

### Panel Thicknesses /

Standard thicknesses available range from 50mm to 250mm in multiples of 25mm.

Variable panel thicknesses are available upon request subject to minimum order quantity.