

altro

Designed for possibilities.
Made for people.



Altro Orchestra™ Custom

asf.com.au

Altro Custom floors




Altro Orchestra™ Custom

Application areas:

- Restaurants / cafés / bars
- Public areas, entrances and sensory rooms in primary secondary and tertiary education
- Retail / offices / commercial building spaces where looks count
- Reception, changing rooms and food concessions in sports centres and gyms

With Altro Orchestra Custom it's possible to create a totally unique space, completely tailored to how the area will be used, and who is using it.


Choose a design from the Altro collection of images and patterns, or upload your own design using our simple step-by-step Custom service. It couldn't be simpler. Altro Orchestra Custom floors have the performance and guarantees you expect from Altro floor plus 15dB impact sound reduction and comfort underfoot.

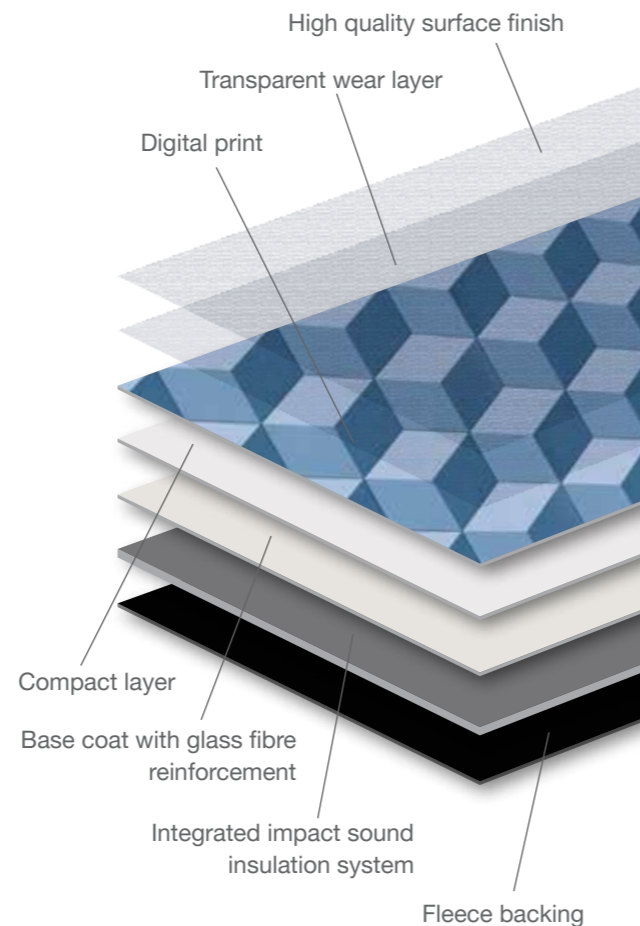

Altro Orchestra Custom - product guide

Altro Orchestra Custom is the perfect solution for creating the 'wow' factor, using the design of your choice, without compromising on the technical benefits. This floor is ideal for areas where people live, work and learn. It's perfect for areas where you want to make an impression, with the added benefit of 15dB impact sound reduction, comfort underfoot and low residual indentation.

This floor is supplied in two metre-wide rolls and has a 2.85mm thickness. It has been designed for areas where the risk of a slip is low. The minimum order volume of Altro Orchestra Custom is 40m², and then in 10m² increments. When ordering, we recommend you consider the space that the floor or wall is going into. What else is in the room? Where are the fixtures and fittings? Do you need to consider floor hatches etc? When your floor is on-site and ready to install, we recommend using the installation guidance for resilient flooring that can be found in the technical documents section of our website.

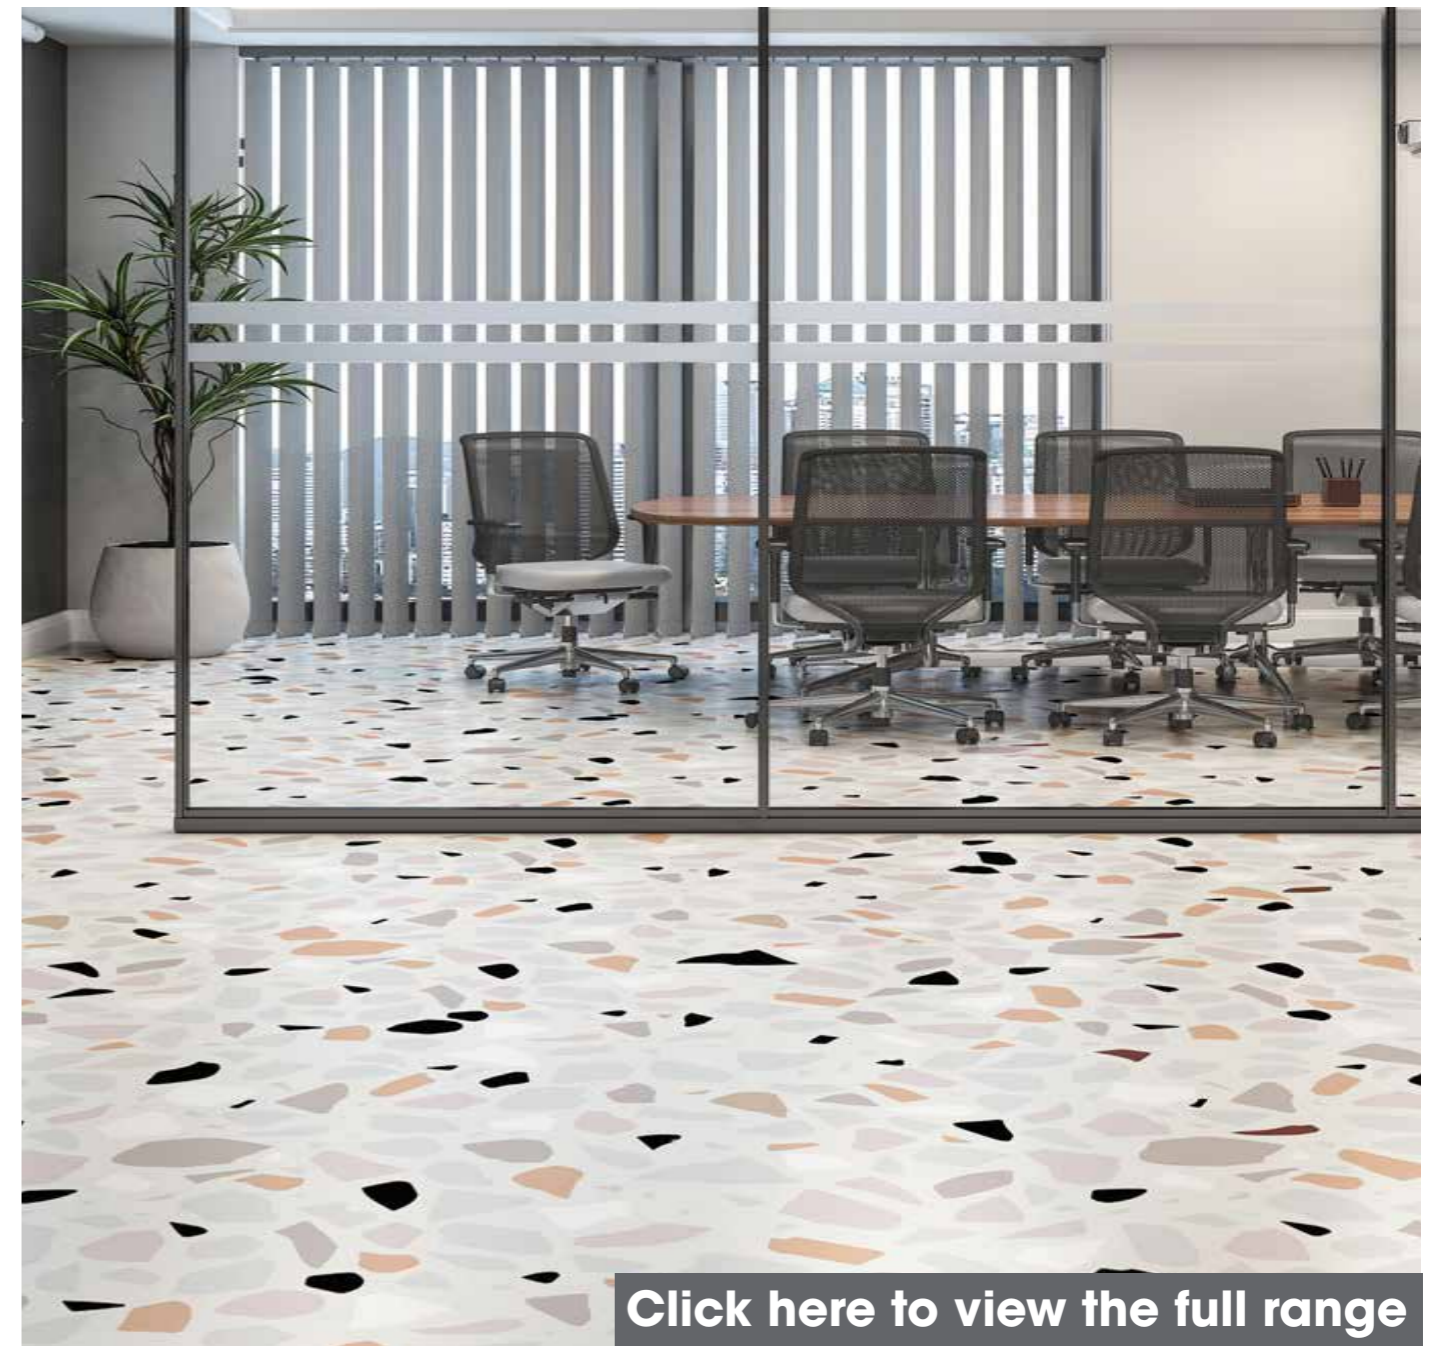

[Click here to view the full range](#)

Ready to order? Call us on 03 9764 7000



Technical information

Altro Orchestra Custom

Fire behaviour tested in acc. with	EN ISO 9239-1 EN ISO 11925-2	≥ 4.5 kW/m ² Pass
Classified in acc. with	EN 13501-1	C _{fl} -s1
Slip resistance	EN 13893 DIN 51130 / BGR 181	≥ 0.30 / DS R10 For enhanced safety, see our ranges that offer sustained slip resistance for life.
Sound insulation	EN ISO 10140	ca. 15 dB
Flooring type	EN 651	Heterogeneous floor
Thickness	EN ISO 24346	2.85 mm
Wear layer thickness	EN ISO 24340	0.7 mm
Roll dimensions	EN ISO 24341	2 m x 20 m = 40 m ²
Weight	EN ISO 23997	2.6 kg/m ²
Residual indentation	EN ISO 24343-1	≤ 0.20 mm
Classification for use	EN ISO 10874	34, 42
Flexibility	EN ISO 24344	Pass
Light fastness	EN ISO 105-B02	≥ 6
Castor chair abrasion	EN 425	Yes, type W
Wear resistance	EN 660-2	Group T
Chemical resistance	EN ISO 26987	Good
Under floor heating	EN 12524	Suitable
Electrical behaviours	EN 1815	≤ 2 kV, antistatic
VOC emissions	CDPH 1350 / Floorscore Indoor Air Comfort Gold	Approved Approved

Altro Whiterock™ wall designs



Antique Copper | 9912

Altro Orchestra™ Custom



Grass 1 | DPSCH0059

Altro Orchestra™



Maraca | CH2855U





Samples

If colour choice is critical, please request a sample of the material

☎ 03 9764 7000

✉ info@asf.com.au

asf.com.au