



*Barrington*  
Roof Shingle & Slate Tile


*Barrington*  
R O O F T I L E S

29 Stud Road  
Bayswater Victoria  
Australia 3153

T: +61 3 9720 1908  
F: +61 3 9720 6870  
E: [sales@barringtonrooftiles.com.au](mailto:sales@barringtonrooftiles.com.au)  
W: [www.barringtonrooftiles.com.au](http://www.barringtonrooftiles.com.au)

Proudly distributed by:



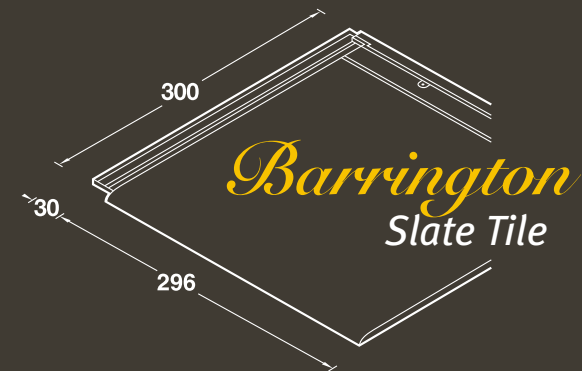

**Specifications**

Size: 300 x 326mm  
 Min Pitch: 16°  
 Max Pitch: 90°  
 Min Gauge: 150mm  
 Max Gauge: 240mm  
 Rafter Spaces: 600mm or 900mm  
 (Batten Type): @600mm spacing-(35mm x 35mm)  
 @900mm spacing-(70mm x 35mm)  
 (minimum 75mm nail to be used)  
 Oregon & Pine

The Barrington Slate Tile combines the beauty of Natural Slate with all the benefits of a lightweight structural roofing system.

Manufactured from Torbex and, tested by the CSIRO to the Australian Building Standards AS4046-1992, the interlocking design and moulded water channels ensure the Barrington Slate will never leak or distort when correctly installed.

Weighing only 800 grams and measuring 300 x 326mm, each tile is capable of supporting up to 120kgs in weight, making it safe to walk on and easy to handle.

**Coverage**


Linear Cover of 1 Slate: 300mm  
 Coverage at 240mm Gauge: 14.8 tiles / m<sup>2</sup>

**Weight**

At 240mm Gauge: 11.8 kg / m<sup>2</sup>  
 Per 1000 Slates: 0.85 tonne

**Installation Sequence**

Fasten with 32mm coated self tapping screw

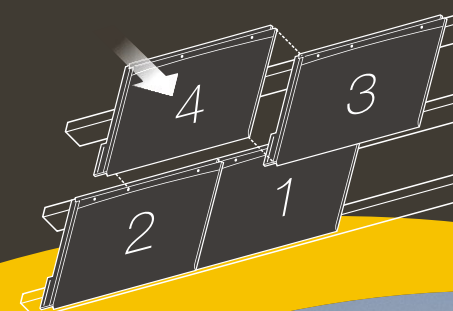

The Barrington Roof Shingle combines the beauty of Natural Slate with all the benefits of a fully designed roofing system using state-of-the-art technology.

Weighing only 1.3kg and measuring 500 x 350mm, each tile will support up to 120kg, making it safe to walk on and easy to handle.

To help reduce the roof weight, the tile uses an interlocking design and moulded water channels. These features help ensure that the Barrington Roof Shingle will never leak or distort when correctly installed.

**Specifications**

Size: 500 x 350mm  
 Min Pitch: 18°  
 Max Pitch: 90°  
 Min Gauge: 240mm  
 Max Gauge: 290mm  
 Rafter Spaces: 600mm or 900mm  
 (Batten Type): @600mm spacing-(35mm x 35mm)  
 @900mm spacing-(50mm x 35mm)  
 (minimum 75mm nail to be used)  
 Oregon & Pine

**Coverage**


Linear Cover of 1 Shingle: 450mm  
 Coverage at 290mm Gauge: 7.5 tiles / m<sup>2</sup>

**Weight**

At 240mm Gauge: 9.8 kg / m<sup>2</sup>  
 Per 1000 Shingles: 1.30 tonne

**Installation Sequence**

Fasten with 32mm coated self tapping screw

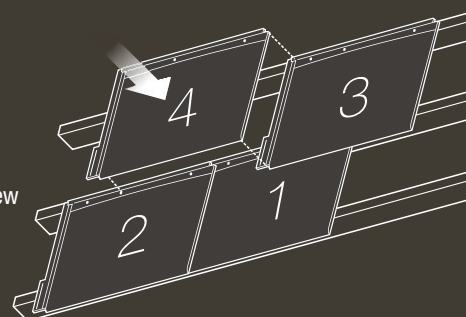

Manufactured from Torbex and tested by the CSIRO to the Australian Building Standards AS 4046 - 1992, the Barrington is UV resistant, and extremely strong. The CSIRO also conducted extensive environmental and performance testing on the tile.