


GenLED One Luminaire

IP20		5 Yr Warranty	LED (PCBA)
------	--	------------------	------------


2016 Winner International IES ANZ Luminaire Design Award of Excellence. The GenLED One luminaire was developed with form and function in mind. Low level side light ambient panels offering a contrast to the main lighting source and gives a pleasant ambience to the working environment, with excellent beam control and spacing.

- Excellent performance and light distribution
- Side lit diffused panels
- Available with air handling or blank trim to suit 400mm or 500mm ceilings (on request)
- 60mm shallow body depth
- 4000K, CRI >80
- DALI and Emergency options available on request
- Easily replaceable remote driver
- 50,000 hours average design life

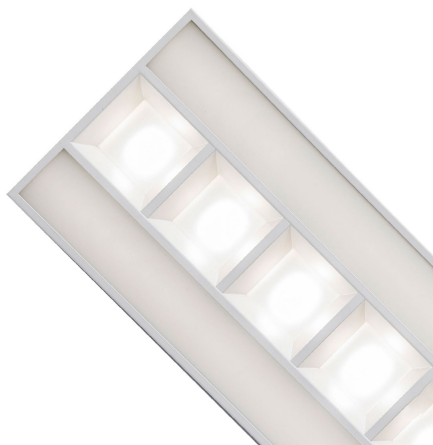


SPECIFICATIONS

Item Code	Width	Height	Weight	Depth	Lumen Output	Lumen Maintenance	CRI
GLED/1234P	290mm	60mm	6kg	1190mm	4340Lm	70	80
GLED/1234U2	290mm	60mm	6kg	1190mm	4340Lm	70	80
GLED/1234U1	290mm	60mm	6kg	1190mm	2580Lm	70	80
GLED/1234E	290mm	60mm	6kg	1190mm	2580Lm	70	80
GLED/0634U1	290mm	60mm	3kg	590mm	1120Lm	70	80
GLED/0634U2	290mm	60mm	3kg	590mm	2200Lm	70	80
GLED/0634E	290mm	60mm	3kg	590mm	1120Lm	70	80

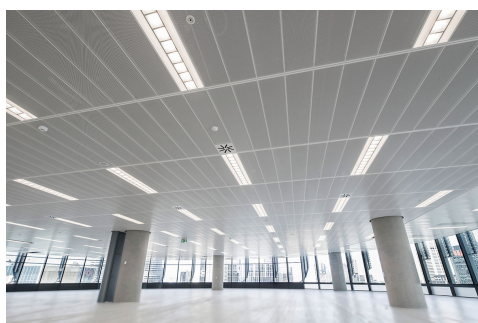

Item Code	Colour Temperature	Colour	Rated Average Life	Voltage	Circuit Wattage	Dimmable	Wattage
GLED/1234P	4000K	White	50000 hours	240V	45W	No	45W
GLED/1234U2	4000K	White	50000 hours	240V	45W	Yes	45W
GLED/1234U1	4000K	White	50000 hours	240V	27W	Yes	27W
GLED/1234E	4000K	White	50000 hours	240V	27W	No	27W
GLED/0634U1	4000K	White	50000 hours	240V	13W	Yes	13W
GLED/0634U2	4000K	White	50000 hours	240V	24W	Yes	24W
GLED/0634E	4000K	White	50000 hours	240V	12W	No	12W

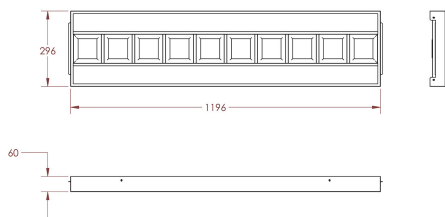

Item Code	Finish	Operating Temperature (Max)
GLED/1234P	Powdercoated	25
GLED/1234U2		25
GLED/1234U1		25
GLED/1234E	Powdercoated	25
GLED/0634U1		25
GLED/0634U2		25
GLED/0634E	Powdercoated	25

PRODUCT ATTRIBUTES

Item Code

GenLED One Luminaire

