



**SER** **FLCOR**  
AUSTRALIA  
*The Future Of Flooring*

LOOSE LAY

LONGBOARD

SERFLOOR.COM.AU



# LOOSE LAY LONGBOARD

The Serfloor Loose Lay Longboard range is a premium and elegant option with a realistic wood look design that is a perfect solution for your flooring choice. Designed for easy and fast installation over most surfaces without the need for underlay.

The extra long planks make them ideal for large open plan areas, with the patterns and colours chosen specifically to suit the size of these boards. With the same great properties as our Loose Lay Shortboard range, they offer another quality option for your home or commercial area.

Serfloor Loose Lay Longboard is dimensionnally stable which means it keeps movement in the floor minimal when exposed to temperature changes and requires no expansion gap when installing. In addition, Serfloor Loose Lay Longboards are designed for easy replacement, if a plank gets damaged it can be easily lifted up and replaced with a new one.



**Comfortable under foot**




**Low VOC emission**



**Water resistant**



**Scratch and stain resistant**




**Sound dampening**




**Easy to maintain**

- Fiberglass core for improved Dimensional Stability
- Non Slip Backing
- Durable & Low Maintenance
- Quick & Easy Installation
- Designed For No Underlay
- Best choice for allergy sufferers
- 15 Years Commercial Wear Warranty
- 30 Years Residential Wear Warranty
- Water Resistant
- Low VOC emissions contribute to better indoor air quality
- Anti-Bacterial Nano Silver Technology
- UV Coated
- Fire, Slip, Oil & Stain Resistant
- Reduces Impact & Sound Travel

SPECIFICATION	STANDARD	RESULT
Total Thickness (mm)	EN 428	5.0mm
Thickness of wear layer (mm)	EN 429	0.5mm (+/- 0.005)
Weight (+/- 50gr/m2)	EN 430	9.9kg/m2
Plank Dimension	EN 427	228mm x 1524mm
Packing	EN 427	6 Planks / 2.0848m2 per box
Accoustic Rating	EN ISO 717-2	53 dB
Dimension Stability	EN 434	PASS
Colour fastness to light	ISO 105 B02	> 6
Residual Indentation	EN 433	> 6
Castor chair test	ISO 4918	No Change / delamination
Flexibility	EN 435	PASS
Abrasion resistance	ASTMD3884	0.1% Loss
Slip Resistance Classification	AS 4586-2013	R10 (>10 <19)
Behaviour to fire	AS/ISO 9239.1-2003	CRF Value: 6.7Kw/M2
		Smoke Value: 165%.min
Chemical products	ASTM F925	PASS
Electric behavior	EN 1081	PASS
Emission of Formaldehyde	ISO 10580 (<10 (24H) UG.M2.H)	<2.3 (24H) UG.M2.H
TVOC emission factor	ISO 10580	After 24 hours: .22 m2.m3
Dynamic coefficient of friction	EN 13893	Longitude: 4 / Width: 9




**Commercial grade**




**Brushed Surface**

- UV coating
- Wear Layer
- Film
- Vinyl core
- Fiberglass layer
- Vinyl core
- Anti-slip rubber backing

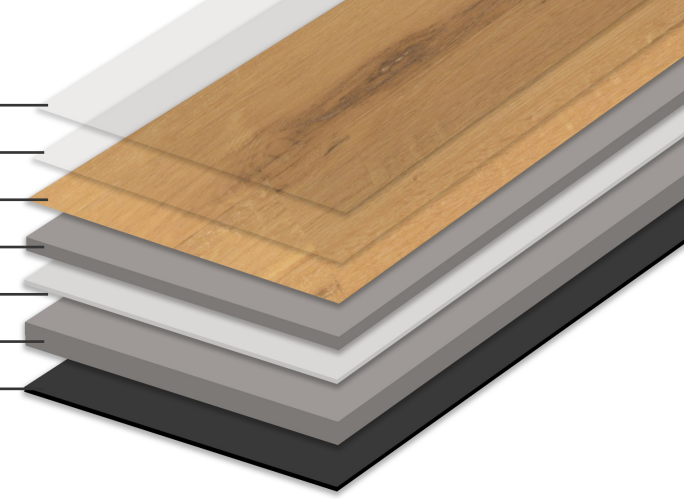

SNOWY GUM SFL-4501

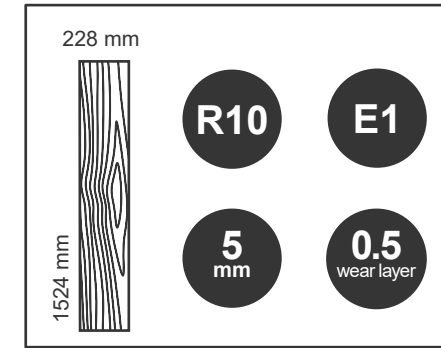

ROYAL GUM SFL-4503



NSW SPOTTED GUM SFL-4504



QLD SPOTTED GUM SFL-4505



MIDNIGHT GUM SFL-4506



RUSTIC GREY SFL-4512



SUNNY OAK SFL-4513



WASHED OAK SFL-4514



FRENCH GREY SFL-4515



LIGHT DISTRESSED OAK SFL-4516





### COLOUR AND PATTERN APPEARANCE

The appearance of colour and pattern can change in different lighting environments or when viewed on a screen or in a brochure. For this reason, we highly recommend you view a sample of the product you are interested in before making your final decision.

Just like real timber, the patterns in our products can have natural variations. If in doubt, please ask your local stockist for a larger sample of the product.

Colour and pattern trends do change and in order to continue supplying our customers with the latest colours and styles, products are sometimes withdrawn at short notice. If this happens, we will always do our best to help you find a colour and pattern you will love just as much.

### CONTACT US



[info@serfloor.com.au](mailto:info@serfloor.com.au)



(03) 9796 4626



1/151-159 Princes Hwy,  
Hallam, VIC 3803



Follow us  
[@serfloor.australia](https://www.instagram.com/serfloor.australia)

[SERFLOOR.COM.AU](https://www.serfloor.com.au)