

Magnetic  
Automation  
Corporation  
USA

Magnetic  
Autocontrol  
Ltda.  
Brazil

Magnetic  
Autocontrol  
GmbH  
Germany

Magnetic  
Autocontrol  
Pty. Ltd.  
India

Magnetic  
Control Systems  
Sdn. Bhd.  
Malaysia

Magnetic  
Automation  
Pty. Ltd.  
Australia

Magnetic  
Control  
Systems  
China

Your authorized Magnetic partner

Magnetic Autocontrol Group  
D-79650 Schopfheim / Germany  
Phone: +49 76 22 / 6 95-5  
e-mail: info@ac-magnetic.com

[www.ac-magnetic.com](http://www.ac-magnetic.com)

5805.5050EN\_00/09.09 - Subject to technical modifications.




Select your barrier ...



Vehicle Access Control Solutions



Application	Vertical									Horizontal	
	economical			intelligent		fast		powerful		MHS 3/4/5	MHS 8
	MBE 30	MBE 35	MBE 50	MIB 30	MIB 40	MIB 10	MIB 20	MTS 6	MTS 8		
Manned gatehouse		X	X		X			X	X		
Private driveway		X	X		X			X	X		
Parking facility	X	X	X	X	X			X	X		
Emergency exit	X	X	X	X	X			X	X	X	X
Parking garage	X	X		X							
Toll station	X			X		X	X				
Industry and trade	X	X	X	X	X			X	X	X	X
Traffic control			X		X			X	X	X	X
Tunnel and bridge control	X	X	X	X	X			X	X		X
Solar or battery driven				X	X						
Recommended duty											
Medium traffic density	X	X	X					X	X	X	X
High traffic density				X	X	X	X				
Technical data											
Lane width up to	3.0 m	3.5 m	5.0 m	3.5 m	6.0 m	3.0 m	3.0 m	8.0 m	10.0 m	4.0 m	12.0 m
	10 ft	12 ft	16 ft	12 ft	20 ft	10 ft	10 ft	26 ft	33 ft	13 ft	40 ft
Opening time	1.8 s	3.0 s	6.3 s	1.4 s	4.0 s	0.6 s	0.9 s	6.0 s	9.0 s	1.8 s 90°	18 s 90°
Features											
Multifunctional controller	X	X	X	X	X	X	X	X	X	X	X
Intelligent functions				X	X	X	X			X	X
Boom position sensor				X	X	X	X				
Choice of door positions				X	X	X	X				
Special accessories	X	X	X	X	X	X	X	X	X	X	X
Specified no. of cycles	2 M	2 M	2 M	5 M	5 M	5 M	5 M	2 M	2 M	2 M	2 M
Low maintenance	X	X	X	X	X	X	X	X	X	X	X
Available ex stock	X	X	X								
Manual/automatic operation	X	X	X	X	X	X	X	X	X	X	
Auto emergency function	X	X		X		X	X				
Input for safety systems	X	X	X	X	X	X	X	X	X	X	X
Auto open on power failure	X	X	X	X	X	X	X	X	X	X	
Status feedback	X	X	X	X	X	X	X	X	X	X	X
Multifunctional relay outputs				X	X	X	X				
Warning light control	X	X	X	X	X	X	X	X	X	X	X

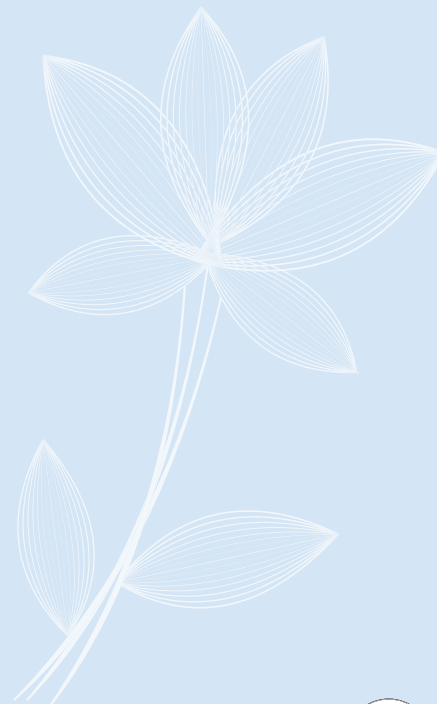

### Value for money ...

#### MBE 30/35/50

...for simple applications. The cost-effective starter package for all applications. Classic design, elegant, with numerous functions and accessories.



Lane width: up to 5.0 m / 16 feet  
Opening time: from 1.8 s



### More value for a bit more money ...

#### MIB 30/40

... meets all needs. Ideal for use in parking lots, general access and traffic control. Top-notch equipment for almost all applications, making MIB the industry benchmark.



Lane width: up to 6.0 m / 20 feet  
Opening time: from 1.4 s



### At top speed ...

#### MIB 10/20

... top gear performance. Extremely fast, reliable and durable. Our contribution to uncongested highway and turnpike traffic.



Lane width: up to 3.0 m / 10 feet  
Opening time: from 0.6 s



### Wide lane = no problem ...

#### MTS 6/8

...powerful, rugged and reliable. The MTS series guarantees high traffic capacity even at lane widths up to 10 m (33 ft).



Lane width: up to 10.0 m / 33 feet  
Opening time: from 6.0 s



### Why not horizontal ...

#### MHS 3/8

...effective and unique with remote control option. This exceptional barrier concept allows for efficient vehicle control in heavy traffic.



Lane width: up to 12.0 m / 40 feet  
Opening time: from 18 s (90°)



### Customized solutions ...

#### Your custom barrier

...designed exclusively for you to meet your system requirements without straining your budget. Give us a try.



Built to your specifications

