



Product Data Sheet



Type/Item No: CT226IP

Features:

Surface mounted IP65 downlight with powder coated die cast aluminium body. The tempered glass is securely fitted to the trim using a full silicone seal. Wiring is from the rear of the product allowing for looping of supply cable. The product is designed and IP rated to offers additional water resistance from within the ceiling cavity as well. Tamper resistant stainless steel fixing screws are supplied as standard. This IP65 downlight is supplied with HF electronic ballast as standard. Lamp replacement is achieved by removal of the front trim

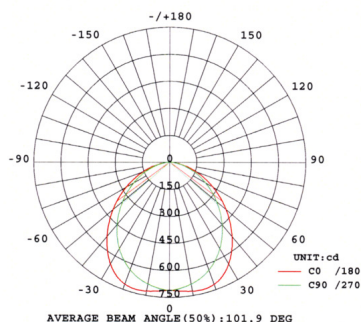

Class: 1 **IP:** 65 **Colour:** white

Lamp:

2x 26w G24q-3 compact fluorescent

Gear:

ELECTRONIC BALLAST-Vossloh-Schwabe
 EN61347-1-2001
 EN61347-2-3-2001+A1+A2
 EN55015-2006
 EN61547-1995+A1
 EN6100-3-2-2006
 EN61000-3-2-1995+A1+A2

Other Lamp Options

CT118IP	1X18W
CT218IP	2X18W
CT126P	1X26W
CT132IP	1X32W
CT232IP	2X32W

Dimensions:

As Shown

