



## Opera™ Cornice


Opera cornice is part of the Inspiration's range, featuring smooth curves and distinctive lines that effectively bridge the junctions between walls and ceilings. Its purpose extends beyond function, providing the perfect finishing touch to the aesthetic harmony of a home. Opera's classical curves balanced with a sharp stepped border bring a sense of sophistication and elegance to any room. When balanced with other interior design features such as architraves, skirting and door hardware, Gyprock Opera is ideal for creating a dramatic style statement in the home, while also fitting comfortably into a variety of interior trends.

### Recommended Use

- Attractive junction for wall and ceiling applications.
- New residential and commercial construction.
- Luxe and Contemporary interior areas requiring an elegant finishing touch.
- Freshening up style of existing interior spaces.

### Design & Installation Considerations

Gyprock Cornice can be applied to Gyprock plasterboard, fibrous plaster or cement rendered surfaces. It is available in a range of profiles and styles that are lightweight and easy to install. Smaller profile sizes can improve the perception of height and space in rooms with lower ceilings. Larger profiles add grandeur and detail. A combination of profiles with similar styling adds detail to a home, and differentiates feature design zones from utility spaces. Opera cornice can be installed directly over existing 55mm Cornice to give an immediate design lift in any home.

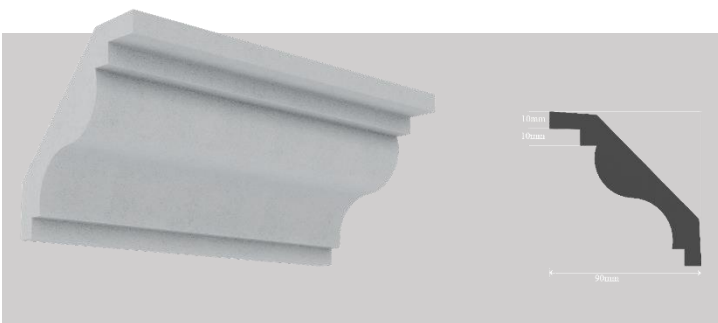

### Product Features



#### 90mm Profile

Provides maximum design presence and visibility



#### Refresh Your Style

Can be installed over existing 55mm Cove cornice



#### 25 Year Warranty

Manufactured for life to provide confidence in quality of product and support.



#### Australian Made

Licensed by Australian Made Campaign Ltd.



## Installation

These details are specific to cornice installation. Gyprock Cornice Cement 45/60/90 is formulated for adhesion of cornice to plasterboard surfaces. Gyprock Masonry Adhesive is recommended for installing cornice on to highly absorbent surfaces or to materials other than plasterboard.

When used in hot and dry conditions, the water in the mix of cornice cements can evaporate or be absorbed into the dry lining surfaces. This situation may lead to the cement not setting correctly and lacking in strength.

In severe drying conditions, mix only small quantities of cement and allow to stand for 10-15 minutes to ensure setting occurs quickly after application. Depending on the severity of the drying conditions, contact surfaces may require dampening with a water brush before applying cement.

| Opera Cornice Specifications |  |
|------------------------------|--|
| Feature                      | Description  |
| Width                        | 90mm   |
| Length                       | 4800mm   |
| Coverage                     | 12kg of Gyprock Cornice Cement will fix approximately 100 metres of cornice. |

## Storage

Protect cornice from weather and moisture. Avoid products sagging by storing horizontally, supported on a level platform or full-width support members spaced at max. 600mm centres.

## Health and Safety

For further information refer to the Safety Data Sheet for this product which is available from [www.gyprock.com.au](http://www.gyprock.com.au) or contact:

CSR Gyprock  
Trinity 3, 39 Delhi Rd, North Ryde NSW 2113  
Australia Phone: **131 744**  
New Zealand Phone: **0800 277 123**

## Installing to Standards

Installing to Standards AS/NZS2589: Gypsum linings – Application and Finishing outlines the procedures for jointing and finishing of Gyprock plasterboard in conjunction with additional details contained in Gyprock Technical Literature.

## Resources

For further information on this product please visit [www.gyprock.com.au](http://www.gyprock.com.au) or refer to the Gyprock Red Book Residential and Commercial Installation Guides. For technical support, contact:

**DESIGNLINK™**

PHONE: 1800 621 117

## Manufactured For Life Warranty

Gyprock products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system. Gyprock continues to lead the market with premium quality products which are the preferred choice of plastering professionals. Gyprock plasterboard products are manufactured to the Australian Standards AS2588 providing confidence in quality of product and support. For details on our product warranty, please log onto [www.gyprock.com.au/warranty](http://www.gyprock.com.au/warranty), or contact us on **1300 306 556**.



Licensed by Australian Made Campaign Limited to use the Australian Made Logo.



Gyprock plasterboard products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system.