


BENT ARM BACKREST

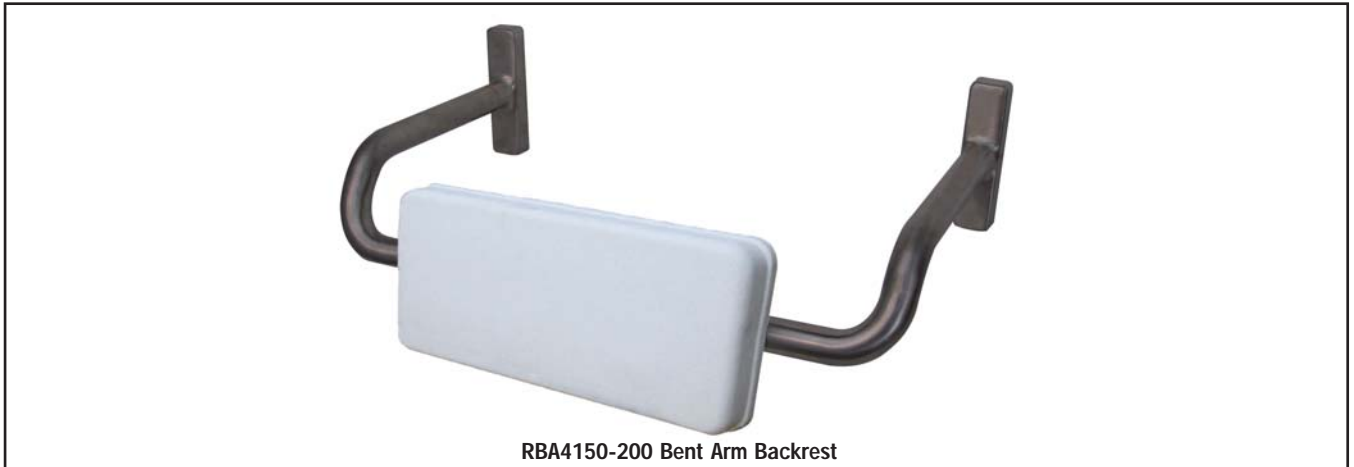

Description

Unit is site adjustable upon installation to ensure accurate location & angle of padded backrest. Compliant with 1100N test.

Materials

Bar: Type-304, Bent Arm Stainless Steel tubing with satin finish, 30mm Dia.

Concealed Mounting Flanges: Cast from type-304, stainless steel, 4mm thick, with 3 holes for attachment to wall.

Bracket Cover: Type-304 Stainless Steel, locks over mounting bracket to conceal mounting screws.

Backrest: White polyurethane, 40mm thick.

Fixings: by others.


Installation

Warning: Backrests are no stronger than the anchors or walls to which they are attached, and therefore, must be firmly secured in order to support the loads for which they are intended.

Refer Installation Instructions for location of fixing points, method of attachment, etc.

Designers Note

RBA product is disabled compliant if it is installed to meet the requirements stipulated in the AS1428.1-2009.

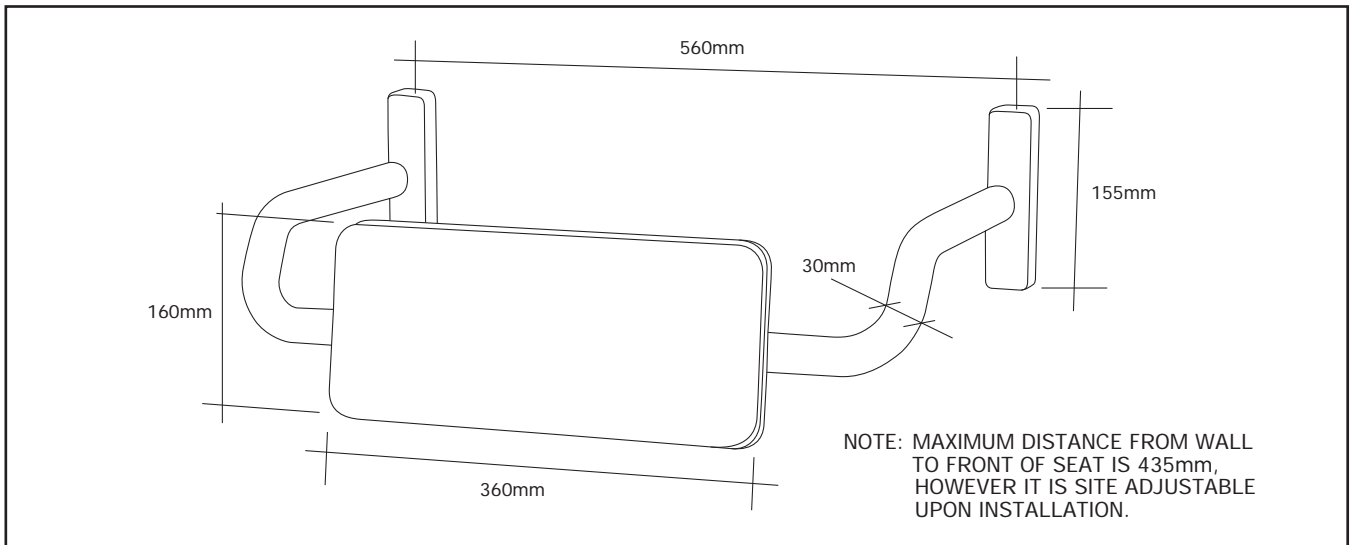

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 12/11 Printed in Australia

© 2011 by RBA Group TD/Model RBA4150-200/1211