



Compact Tilt-Parking System


It is hydraulic driven type that lifted directly by cylinders. (With capacity of 2000kg)
 Different finishing (powder coat & galvanized) & waterproof treatments are available at customer's request.

		Type	
Parking	Parking Vehicels		2
	Single vehicle weight (kg)		≤ 2000
Dimensions (mm)	a		2585
	b		3899
	c		2590
	d		1600
	e		1848
Lifting speed (seconds)			< 45
Power (hydraulic power in Kw)			2.2



Advantages:

- Ultra low noise
- Safe and reliable
- Small space occupation
- Beautiful and fashionable in appearance
- Both suitable for home use and public use
- Simple operation, Easy and fast installation

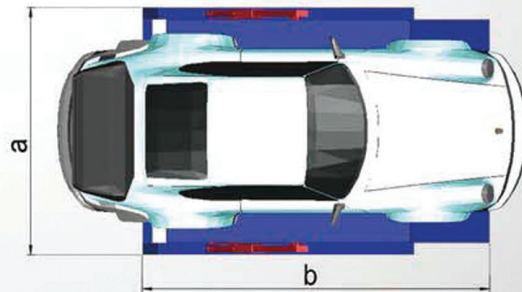

- * Manual lock release
- * 10 degree angle platform
- * There are electric and manual lock releases available.
- * Each unit is 750kg, and each 20ft container can fit in 10 units, and each 40ft can fit in 20 units.
- * Customer can choose different size of the lift.



Parking Solutions