




bellé

where light becomes art

LED FEATURE LIGHTS

bellé

where light becomes art

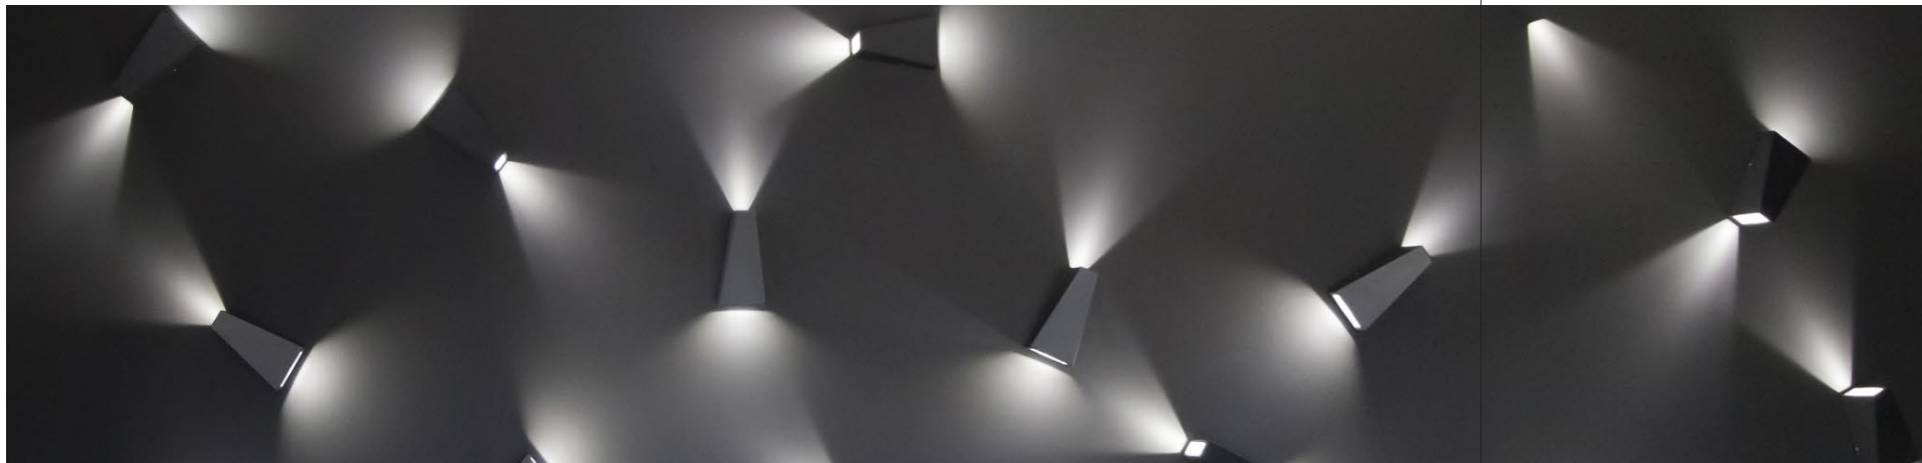

Creating art from light;

The Bellé Collection encompasses imaginative design with high quality finishes and robust construction to create a product which will remain timeless and is guaranteed to impress.

QUICK REFERENCE GUIDE

SIMPÉ	4
PELLÉ	6
BUTTERFLY	8
HORIZON	10
WEDGE	12
FOLD	14
MATRIX	16
WING	18
ECLIPSE	20
ETERNAL	22
REFLECT	24
LINERE	26
UNO	28
DUO	30
WALL-C	32
WALL-S	33
iDOT	34

SIMPÉ

ML-SIMPE-W white / warm white, white housing

ML-SIMPE-G white / warm white, grey housing



Technical Information

Total power consumed: 9.6W

Lumen output: White 850lm / Warm White 810lm

Colour temperature: White 5,000K / Warm White 3,000K

IP rating: IP20

LED Chip: Samsung

Beam angle: 103 degrees

Dimmable: Yes

Power supply: 240V

Average life: 35,000 hrs*

Housing: Aluminium

Warranty: Five years

Width 340 mm | Height 78.5 mm | Depth 250 mm

*Average life calculated on expected average lifespan



SIMPÉ

A classic replica design, elegant in appearance with a subtle yet distinctive styling, the SIMPE is suited to traditional and contemporary installations.

Hidden behind its gentle façade are strong features including powerful illumination, dimmable functionality and seamless aluminium construction.



bellé
where light becomes art

PELLÉ

ML-PELLE-W white / warm white, white housing

ML-PELLE-G white / warm white, grey housing

Technical Information

Total power consumed: 2 x 6W

Lumen output: White 1,200lm / Warm White 940lm

Colour temperature: White 5,000K / Warm White 3,000K

IP rating: IP20 and IP54

LED Chip: Citizen

Beam angle: 67 degrees outward

Dimmable: Yes

Power supply: 240V

Average life: 35,000 hrs*

Housing: Aluminium

Warranty: Five years

Width 200 mm | Height 70 mm | Depth 218 mm


*Average life calculated on expected average lifespan



PELLÉ

An up-lighter for the architectural space, the PELLE is perfect for highlighting an impressive ceiling or reflecting a subtle lighting effect.

With precise lines and a symmetrical shape, the PELLE houses an angled beam which projects outward at 67 degrees. Coupled with the functions of a dimmable driver and automation compatibility, impressive lighting effects can be achieved indoors and outdoors.

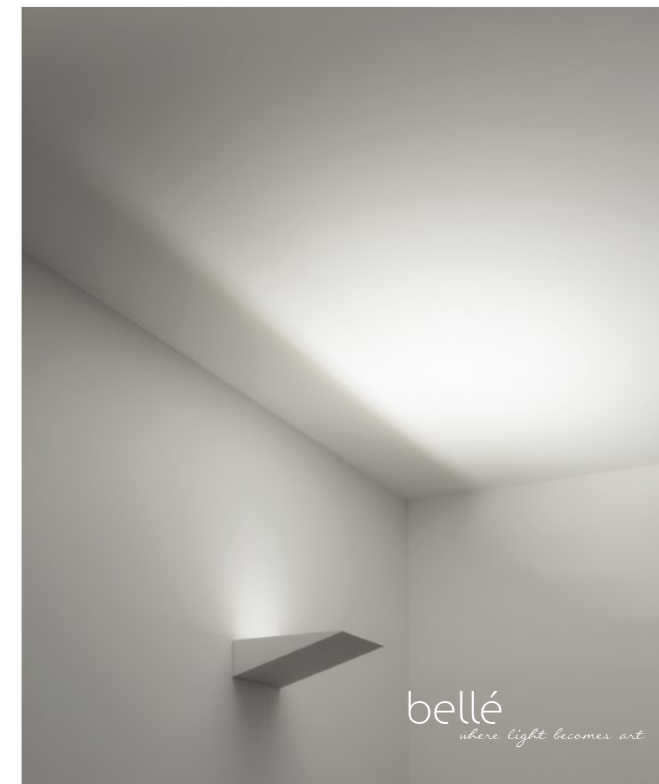

bellé
where light becomes art

BUTTERFLY

ML-BUTTERFLY-W *white / warm white, white housing*
ML-BUTTERFLY-G *white / warm white, grey housing*

Technical Information

Total power consumed: 2 x 7W
Lumen output: White 845lm / Warm White 714lm
Colour temperature: White 5,700K / Warm White 3,000K
IP rating: IP20
LED Chip: Bridgelux
Beam angle: 2 x 40 degrees
Dimmable: Yes
Power supply: 240V
Average life: 35,000 hrs*
Housing: Aluminium
Warranty: Five years
Width 80 mm | Height 260 mm | Depth 80 mm

*Average life calculated on expected average lifespan



BUTTERFLY

Designed by David Teeland Architects

With subtle lines and a unique design, the BUTTERFLY is a multi-directional fitting which creates a playful dual illumination.



bellé
where light becomes art

HORIZON

ML-HORIZON-W white / warm white, white housing

ML-HORIZON-G white / warm white, grey housing

Technical Information

Total power consumed: 15W

Lumen output: White 1,380lm / Warm White 1,060lm

Colour temperature: White 5,000K / Warm White 3,000K

IP rating: IP40

LED Chip: CREE

Beam angle: 100 degrees

Dimmable: Yes

Power supply: 240V


Average life: 35,000 hrs*

Housing: Aluminium

Warranty: Five years

Width 300 mm | Height 50 mm | Depth 150 mm

*Average life calculated on expected average lifespan

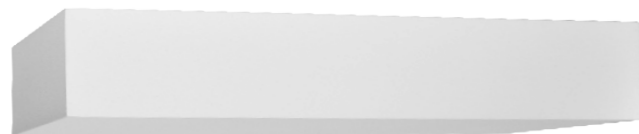

HORIZON

Designed by David Teeland Architects

Simplistic in line, the HORIZON offers a minimalist décor style suited to contemporary design.

Reminiscent of the natural HORIZON the luminescent glow creates a beautiful effect for any setting.



bellé
where light becomes art

WEDGE

ML-WEDGE-W white / warm white, white housing

ML-WEDGE-G white / warm white, grey housing

Technical Information

Total power consumed: 15W

Lumen output: White 1,310lm / Warm White 1,120lm

Colour temperature: White 5,000K / Warm White 3,000K

IP rating: IP54

LED Chip: CREE

Beam angle: 100 degrees

Dimmable: Yes

Power supply: 240V

Average life: 35,000 hrs*

Housing: Aluminium

Warranty: Five years

Width 200 mm | Height 80 mm | Depth 130 mm

*Average life calculated on expected average lifespan



WEDGE

Designed by David Teeland Architects

The precision angles of the WEDGE provide a sophisticated yet simplistic look.

Paired with functionality, the WEDGE offers endless possibilities to the designer with a sense of depth and perspective.



bellé
where light becomes art

FOLD

ML-FOLD-W white / warm white, white housing

ML-FOLD-G white / warm white, grey housing

Technical Information

Total power consumed: 6W

Lumen output: White 560lm / Warm White 400lm

Colour temperature: White 5,000K / Warm White 3,000K

IP rating: IP20

LED Chip: Citizen

Beam angle: 40 X 150 degrees

Dimmable: No

Power supply: 240V

Average life: 35,000 hrs*

Housing: Aluminium

Warranty: Five years


Width 150 mm | Height 145 mm | Depth 70 mm

*Average life calculated on expected average lifespan



FOLD

The light that quantifies simplistic design! A single fold body with an integrated LED washes light above the fitting creating a circular radiance. Impressive in its features turned on or off, the FOLD is an all round leader in design and function.

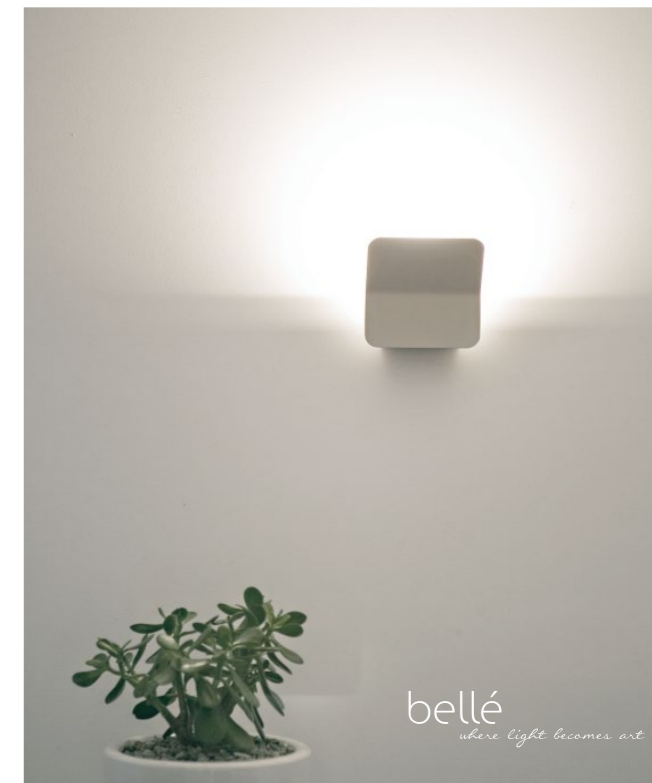

bellé
where light becomes art

MATRIX



ML-MATRIX-W white / warm white, white housing

ML-MATRIX-G white / warm white, grey housing

Technical Information

Total power consumed: 2 x 3W

Lumen output: White 616lm / Warm White 438lm

Colour temperature: White 5,000K / Warm White 3,000K

IP rating: IP54

LED Chip: Citizen

Beam angle: 40 & 150 degrees

Dimmable: No

Power supply: 240V

Average life: 35,000 hrs*

Housing: Aluminium

Warranty: Five years


Width 79 x 32 mm | Height 140 mm | Depth 79 x 32 mm



*Average life calculated on expected average lifespan

MATRIX

This indoor/outdoor wall light features unique dual beam angles which create artistic and appealing impressions. Featuring a revolutionary triangular designed body, the MATRIX will surprise any designer.

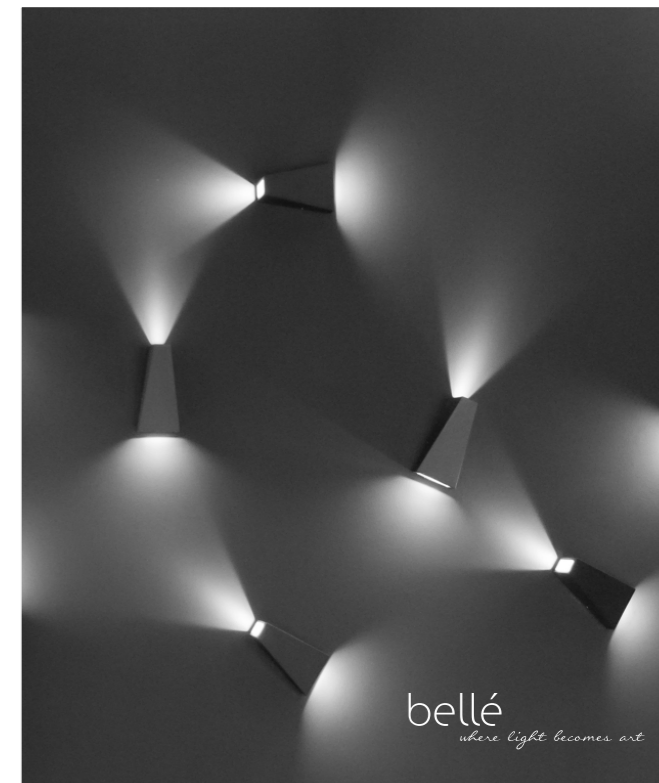

bellé
where light becomes art

WING



ML-WING-W white / warm white, white housing

ML-WING-G white / warm white, grey housing

Technical Information

Total power consumed: 3W

Lumen output: White 290lm / Warm White 200lm

Colour temperature: White 5,000K / Warm White 3,000K

IP rating: IP20

LED Chip: Citizen

Beam angle: 40 X 150 degrees

Dimmable: No

Power supply: 240V


Average life: 35,000 hrs*

Housing: Aluminium

Warranty: Five years


Width 75 mm | Height 185 mm | Depth 95 mm

*Average life calculated on expected average lifespan

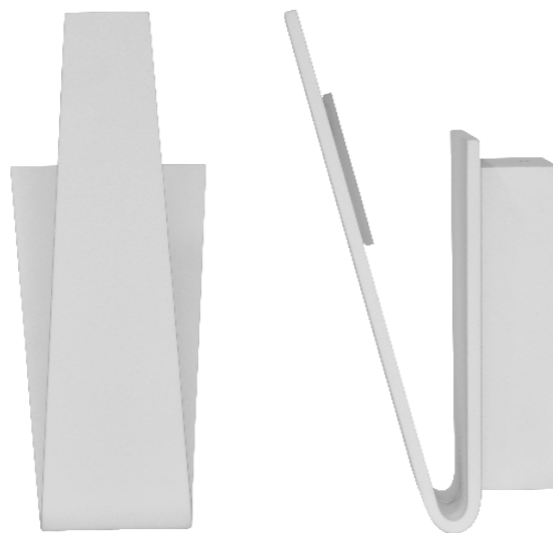

WING

Reflecting artistic values combined with lighting function, the WING has been constructed using a handmade single fold of aluminium. Perfectly suited to areas requiring gentle illumination with creative styling, whether illuminated or not, the unique design is truly a work of art.

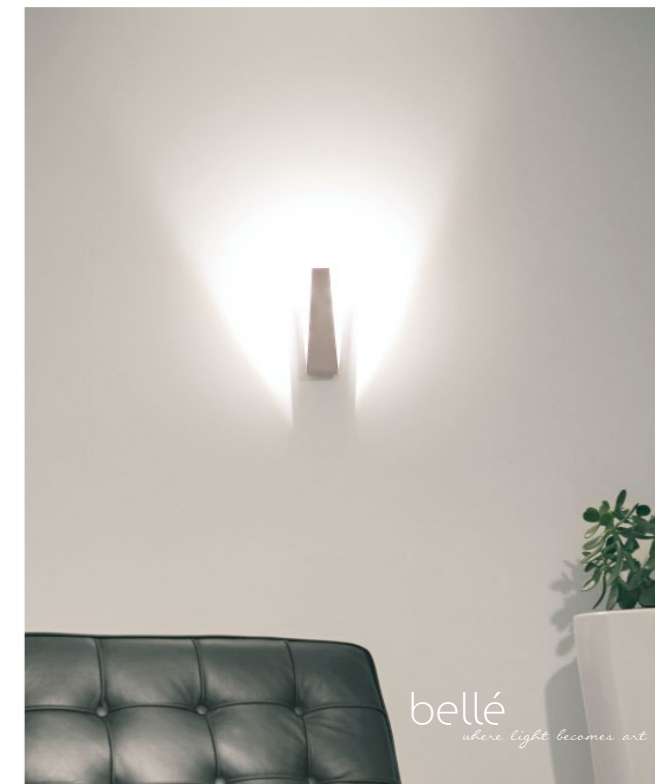

bellé
where light becomes art

ECLIPSE

ML-ECLIPSE-W white / warm white, white housing

ML-ECLIPSE-G white / warm white, grey housing

Technical Information

Total power consumed: 7W

Lumen output: White 360lm / Warm White 340lm

Colour temperature: White 5,000K / Warm White 3,000K

IP rating: IP20

LED Chip: Sharp

Beam angle: 140 degrees

Dimmable: No

Power supply: 240V

Average life: 35,000 hrs*

Housing: Aluminium

Warranty: Five years

Width 160 mm | Height 60 mm | Depth 135 mm

*Average life calculated on expected average lifespan



ECLIPSE

Highlighting a seamlessly contoured face with a reverse mounted LED, the ECLIPSE creates beautiful lighting illusions of smooth semi-circles.

bellé
where light becomes art

ETERNAL

ML-ETERNAL-W white / warm white, white housing

ML-ETERNAL-G white / warm white, grey housing



Technical Information

Total power consumed: 8W

Lumen output: White 460lm / Warm White 400lm

Colour temperature: White 5,000K / Warm White 3,000K

IP rating: IP20

LED Chip: Samsung

Beam angle: 140 degrees

Dimmable: No

Power supply: 240V

Average life: 35,000 hrs*

Housing: Aluminium

Warranty: Five years

Width 400 mm | Height 50 mm | Depth 150 mm

*Average life calculated on expected average lifespan

ETERNAL

Timeless in design and impeccable in styling the ETERNAL creates an illusion of serenity.

The smooth rectangular shaping conceals a softly diffused row of high powered LED chips, ideal for attaining that lasting impression in bathrooms, bedrooms, living and dining areas.

bellé
where light becomes art

REFLECT

ML-REFLECT-W white / warm white, white housing

ML-REFLECT-G white / warm white, grey housing

Technical Information

Total power consumed: 2 x 3W

Lumen output: White 440lm / Warm White 390lm

Colour temperature: White 5,000K / Warm White 3,000K

IP rating: IP54

LED Chip: Citizen

Beam angle: Adjustable

Dimmable: No

Power supply: 240V

Average life: 35,000 hrs*

Housing: Aluminium

Warranty: Five years

Width 100 mm | Height 100 mm | Depth 100 mm

*Average life calculated on expected average lifespan



REFLECT

Imagination and versatility are the concepts of the REFLECT design. The ingenuity of adjustable reflectors allows directional movement of the light beam to customise your lighting style indoors and outdoors.

bellé
where light becomes art

LINERE

ML-ETERNAL-W white / warm white, white housing

ML-ETERNAL-G white / warm white, grey housing

Technical Information

Total power consumed: 7W

Lumen output: White 395lm / Warm White 245lm

Colour temperature: White 5,000K / Warm White 3,000K

IP rating: IP54

LED Chip: Bridgelux

Beam angle: 40 x 150 degrees

Dimmable: No

Power supply: 240V

Average life: 35,000 hrs*

Housing: Aluminium

Warranty: Five years

Width 65 mm | Height 600 mm | Depth 128 mm

*Average life calculated on expected average lifespan



LINERE

Why use a boring bollard when you can create ambience with the Linere.

The base mounted walkway fitting directs an LED illumination from the shaft which washes a symmetrical beam onto the ground. Perfect for driveways, pathways and entrance lighting.



UNO

ML-UNO-W white / warm white, white housing

ML-UNO-G white / warm white, grey housing

Technical Information

Total power consumed: 4W

Lumen output: White 300lm / Warm White 220lm

Colour temperature: White 5,000K / Warm White 3,000K

IP rating: IP54

LED Chip: Samsung

Beam angle: 40 degrees

Dimmable: No

Power supply: 240V

Average life: 35,000 hrs*

Housing: Aluminium

Warranty: Five years

Width 45.5 mm | Height 74 mm | Depth 45.5 mm

*Average life calculated on expected average lifespan



UNO

Less really is more !

Within its tiny solid aluminium body the UNO features a single downward facing LED and an internal driver. Ideal for low level illumination indoors or outdoors the compact design is one of the smallest available.



bellé
where light becomes art

DUO

ML-DUO-W white / warm white, white housing

ML-DUO-G white / warm white, grey housing

Technical Information

Total power consumed: 2 x 4W

Lumen output: White 2 x 300lm / Warm White 2 x 220lm

Colour temperature: White 5,000K / Warm White 3,000K

IP rating: IP54

LED Chip: Samsung

Beam angle: Up/Down 40 degrees

Dimmable: No

Power supply: 240V

Average life: 35,000 hrs*

Housing: Aluminium

Warranty: Five years

Width 45.5 mm | Height 110 mm | Depth 45.5 mm

*Average life calculated on expected average lifespan




DUO

Constructed from a solid aluminium body, the DUO features dual LED beams and an internal driver. With flush mounted lenses and sharp clean lines it maintains a compact appearance whilst creating a comfortable ambience for your indoor or outdoor project.



WALL-C

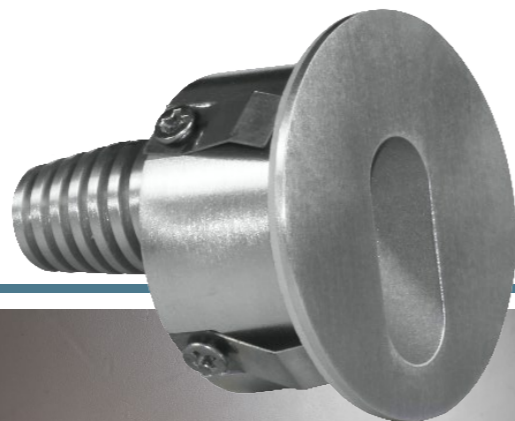


ML-WALL-C *white / warm white*

Aluminium circular faced recessed wall light with anti-glare beam. Suitable for plaster or masonry / concrete installation.


Technical Information

Total power consumed: 1W
Lumen output: 80lm
Colour temperature: White 6,000K / Warm white 3,200K
IP rating: IP54
LED chip: CREE
Beam angle: 40 degrees
Dimmable: No
Power supply: 240V
Average life: 35,000 hrs**
Warranty: Three years
Face diameter 47 mm | Depth 47 mm | Cut-out 42 mm
Kit includes: 1 x WALL light and 240V power supply

*Average life calculated on expected average lifespan

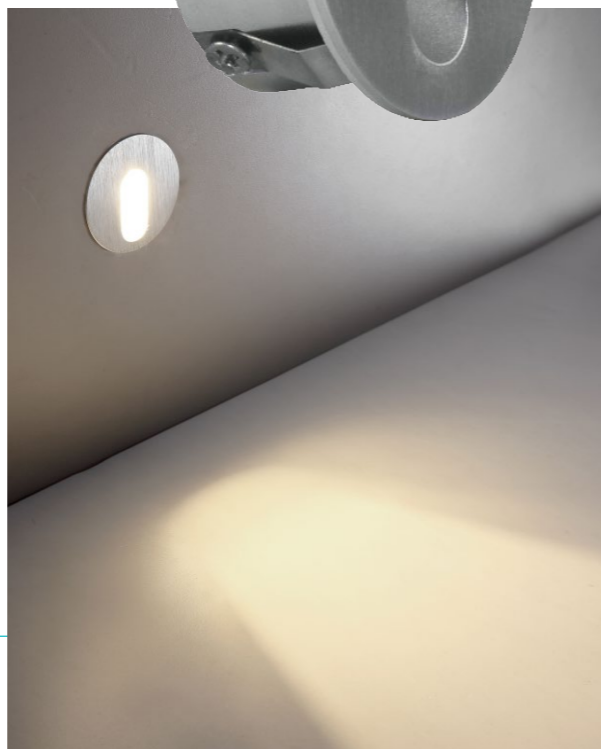

WALL-S

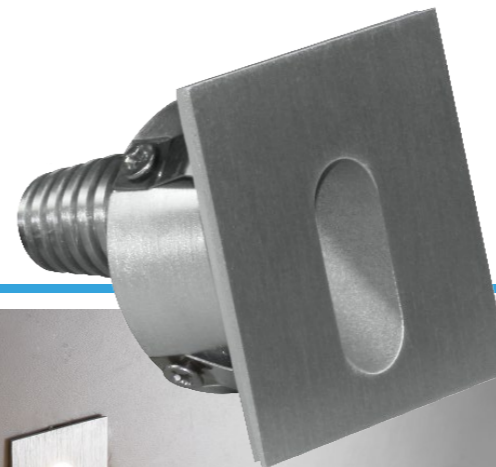

ML-WALL-S *white / warm white*

Aluminium square faced recessed wall light with anti-glare beam. Suitable for plaster or masonry / concrete installation.


Technical Information

Total power consumed: 1W
Lumen output: 80lm
Colour temperature: White 6,000K / Warm white 3,200K
IP rating: IP54
LED chip: CREE
Beam angle: 40 degrees
Dimmable: No
Power supply: 240V
Average life: 35,000 hrs**
Warranty: Three years
Face 45 x 45 mm | Depth 55 mm | Cut-out 42 mm
Kit includes: 1 x WALL light and 240V power supply

*Average life calculated on expected average lifespan



iDOT

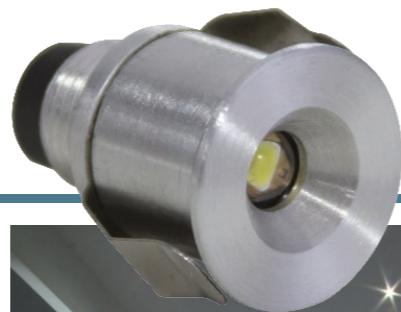

ML-iDOT *white / warm white*

Technical Information

Total power consumed: 5 x 1W

Lumen output: White 80lm p/head, Warm White 52lm p/head

Colour temperature: White 6,300K / Warm white 3,200K

IP rating: IP20

LED chip: SEOUL

Beam angle: 30 degrees

Dimmable: No

Power supply: 350mA

Average life: 35,000 hrs*

Warranty: Two years

Diameter 20 mm | Cut-out 16 mm | Height 27.5 mm

Kit includes: 5 x iDOT lights and 350mA driver

*Average life calculated on expected average lifespan



bellé

where light becomes art

LED FEATURE LIGHTS

WHERE TO BUY

Bellé LED feature lights are available from selected lighting wholesale and retail outlets.

Visit www.melec.com.au for more information and stockist details.

DESIGN SERVICES

M-Elec provides a design consultation service for the architecture and design industries. For more information contact our Design Consultant on 1300 222 445.

TECHNICAL SPECIFICATION

For Photometric files and Installation guides visit our website www.melec.com.au or contact our office on 1300 222 445.



www.melec.com.au | T 1300 222 445



bellé
where light becomes art



www.melec.com.au | T 1300 222 445