



TECH DATA | 2 - 4mm Rubber Flooring

CHARACTERISTICS	STANDARD	UNIT	REQUIREMENTS	NATURAJ RAYAR	UNI	GRANITO	GRANITO ELASTIC	GRANITO ESD	GRAIN	ES CLASSIC	ES STRONG	ZERO.4		
WEIGHT		Kg/ m ²		4.9	5.2	3.3	4.8	3.3	4.8	3.8	5.2	4.9		
ROLL SIZE		m		1.90 x 10								500 x 500mm	1000 x 1000mm	1000 x 1000mm
THICKNESS		mm		3mm	3mm	2mm	4mm	2mm	3mm	2.7mm	4mm	3mm		
HARDNESS	ISO 7819	Shore A	≥ 75	85 ± 5	85 ± 5	88 ± 5	85 ± 5	85 ± 5	90 ± 5	90 ± 5	90 ± 5	90 ± 5		
RESIDUAL INDENTATION	EN 433	mm	≤ 0.15 ≤ 0.20 ≤ 0.25	0.08	0.08	0.05	-	0.08	0.08	0.08	0.12	-		
ABRASION RESISTANCE	ISO 4649 (Met. A- 5N)	mm ³	≤ 250	190	165	150	170	160	160	140	140	140		
DIMENSIONAL STABILITY	EN 434	%	± 0.40 max									± 0.30		
FLEXIBILITY	EN 435 Met. A (Ø 20mm)		No fissuring									COMPLY		
COLOUR FASTNESS TO ARTIFICIAL LIGHT	ISO 105-B02 Met. 3	Degree	≥ 6 blue scale, ≥ 3 grey scale									COMPLY		
CIGARETTE BURN	EN 1399	Rating	Met. A ≥ 4 Met. B ≥ 3									COMPLY		
FIRE RESISTANCE	AS/ISO9239-1		COMPLY									MEETS ALL BCA – NCC REQUIREMENTS		
SLIP RESISTANCE	AS4586-1999											R9		
STAIN RESISTANCE	EN 423											Resistant		
ELECTROSTATIC CHARGE	EN 1815	kV										≤ 2		
REDUCTION OF SOUND DUE TO TREADING	ISO 10140-3	dB (approx.)		10	10	6	20	6	10	8	10	8		
CASTOR CHAIRS	EN 425											Suitable for Wheel castors "W" as stated in EN STANDARD 12529 2 Pack adhesive is strongly recommended in high stress areas.		
ELECTRICAL BEHAVIOUR	EN 1081 Met. A	ohm										≤ 10 ⁹		

Complimentary technical advice and sample service available | For local personal service phone freecall 1300 786 585
Please enquire of your Spectrum representative to ensure material availability | Allow 8-10 weeks delivery (on some colours)

Installation | Correct installation is an important part of a successful project. To facilitate installation the underside of the flooring is sanded. All products should be installed in accordance with AS1884-2012 and good trade practice. Detailed laying instructions and water based non toxic adhesive recommendations are available on request.

Maintenance | Easy maintenance using environmentally safe materials to high European standards should be performed dependent on site conditions. Detailed cleaning instructions are available for each product on request.

© Copyright Aug 2013 | This information is correct at the time of printing 8/13, the manufacturer reserves the right to carry out modifications aimed at product improvement without notice.






Classification UPEC U₄ P₃ E₂ C₁


G 363 Creme Brulee



G 315 Macadamia

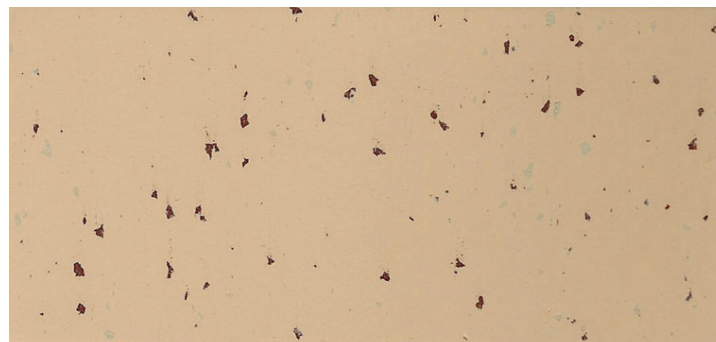


G 370 Smoke

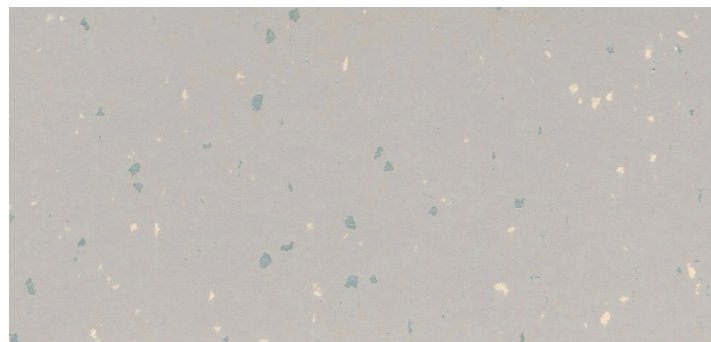


G 479 Vanilla




G 431 Oyster Grey

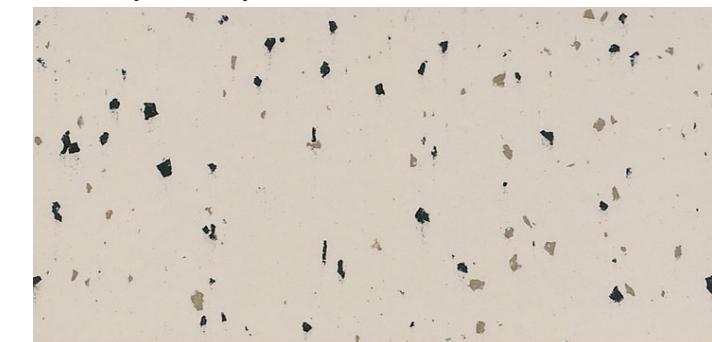


G 480 Cement

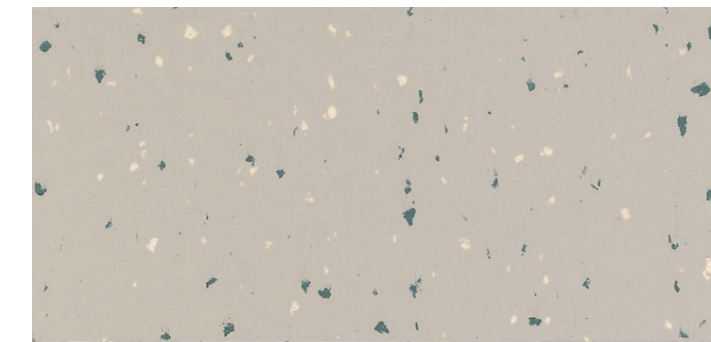


G 365 Mango

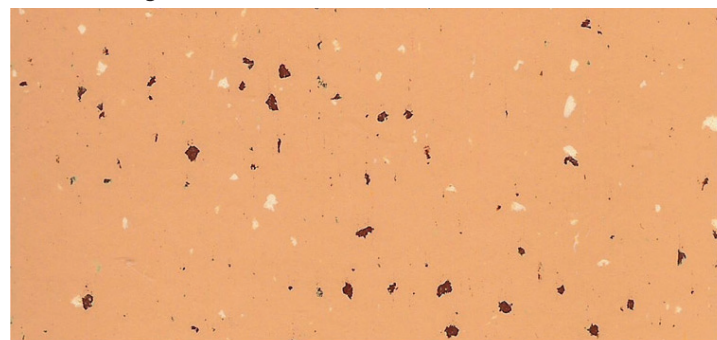


G 473 Green Tea

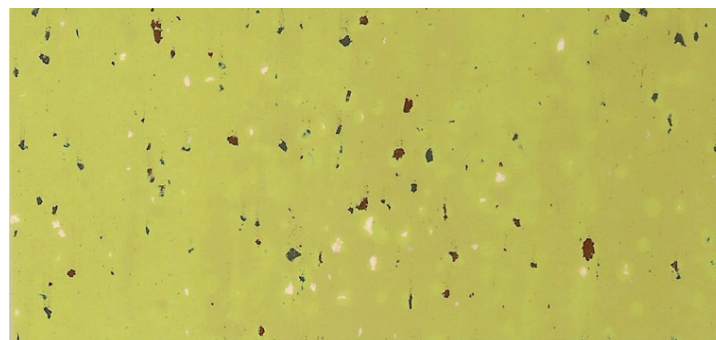


G 371 Pastel Blue

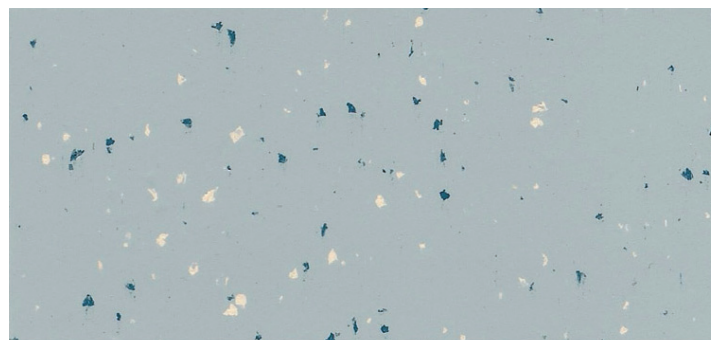


G 368 Tan

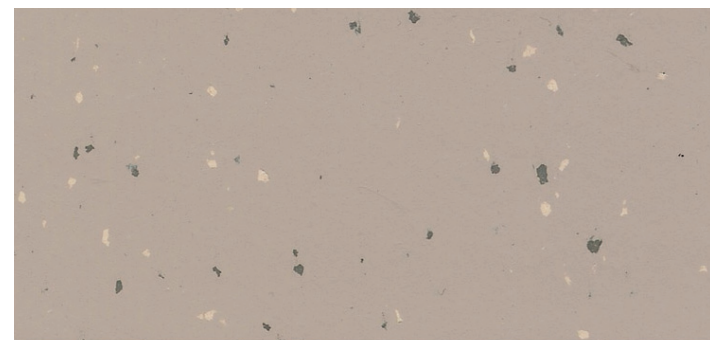


G 305 Grey

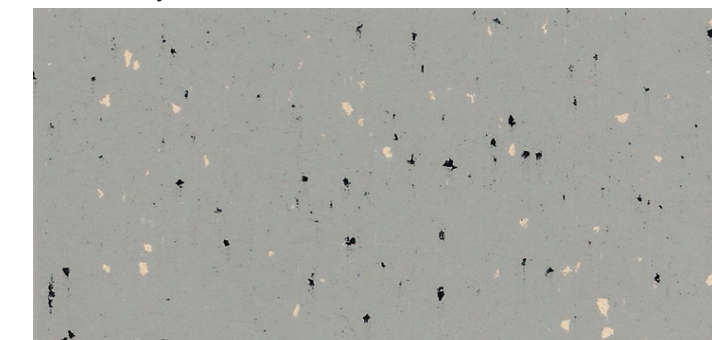


G 478 Dune

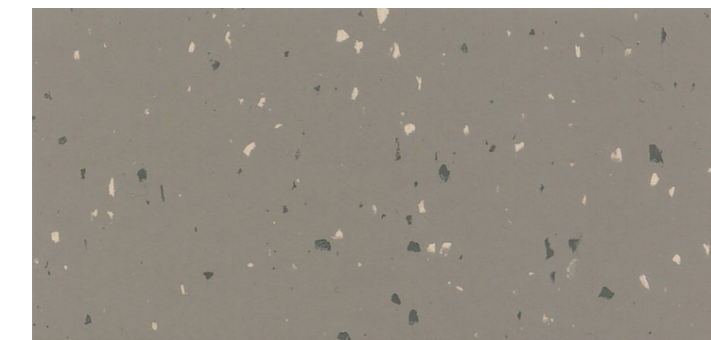


G 472 Apricot

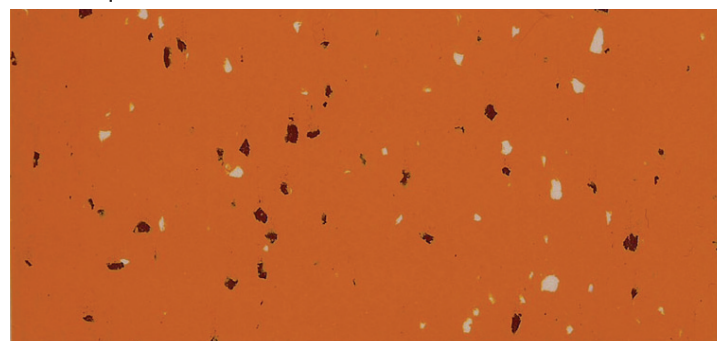


G 378 Pastel Green

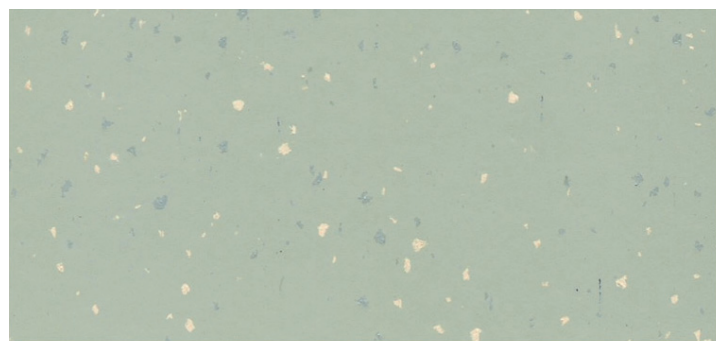

G 372 Storm

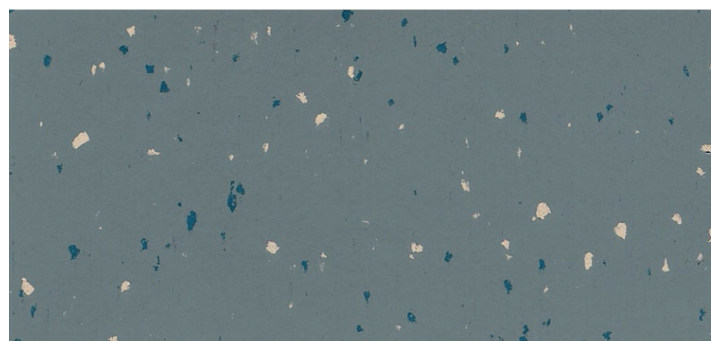


G 475 Latte

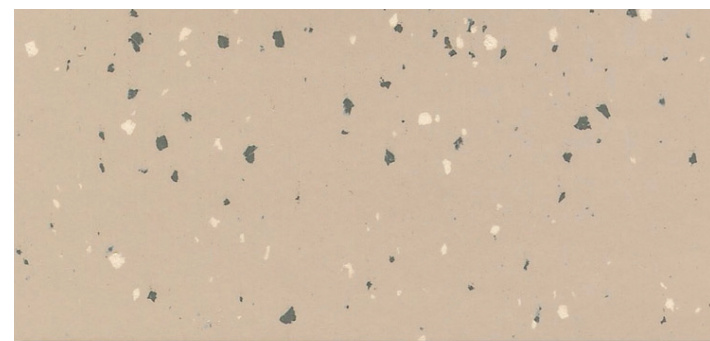


G 306 Mid Grey




G 477 Covert Green

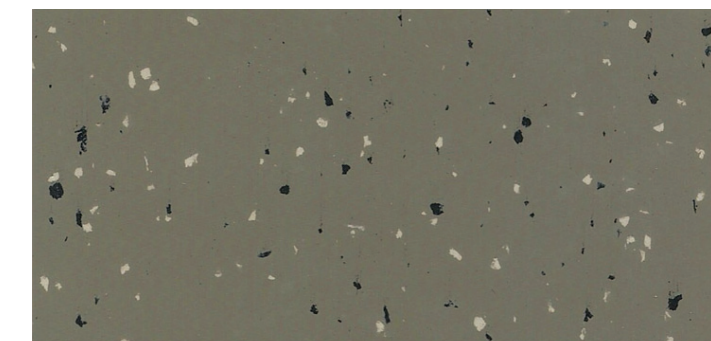


G 367 Burnt Orange

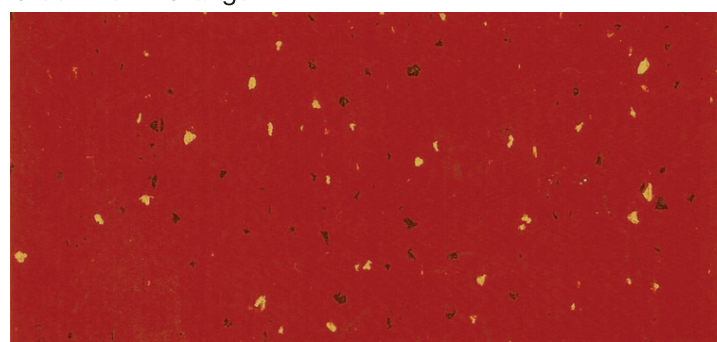


G 336 Sage Green

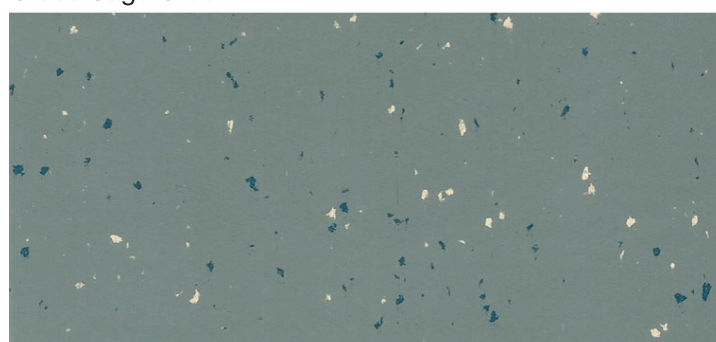


G 342 Deep Blue

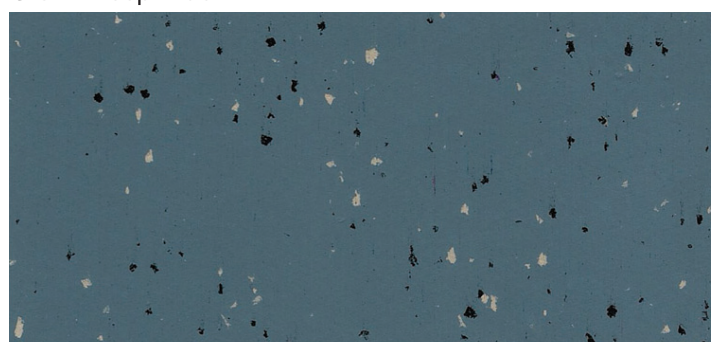

G 474 Cappuccino

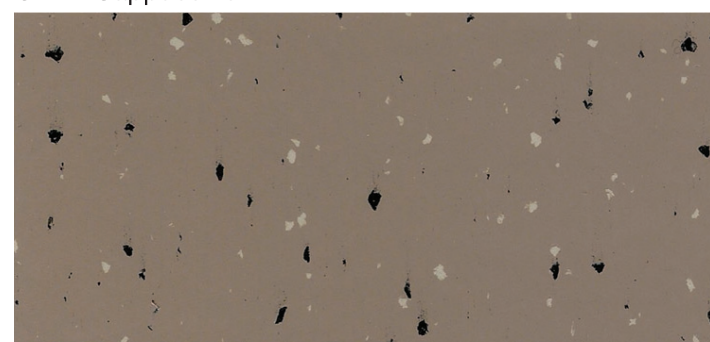

G 308 Dark Grey

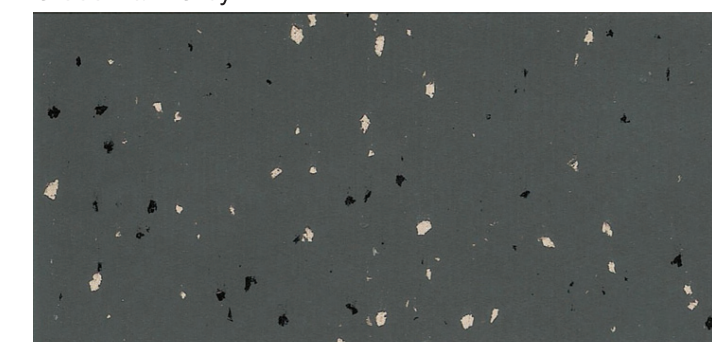

G 476 Long Black

