



SafeScape® S9000

Fire Rating

Max Width

Max Draw

180 minutes

UNLIMITED


7 metres

SafeScape® S9000



The SafeScape® S9000 Series fire door system is a side coiling fire and smoke rated door with one or multiple integral swing type egress doors, a complying method of egress. The side coiling design makes this product ideal for opening in rated walls where headroom clearance is limited and enables the assembly to navigate around tight curves and contoured openings.

When the SafeScape® S9000 fire door assembly is in the activated or fully closed position, egress is still possible through a complying egress door located at the leading edge.

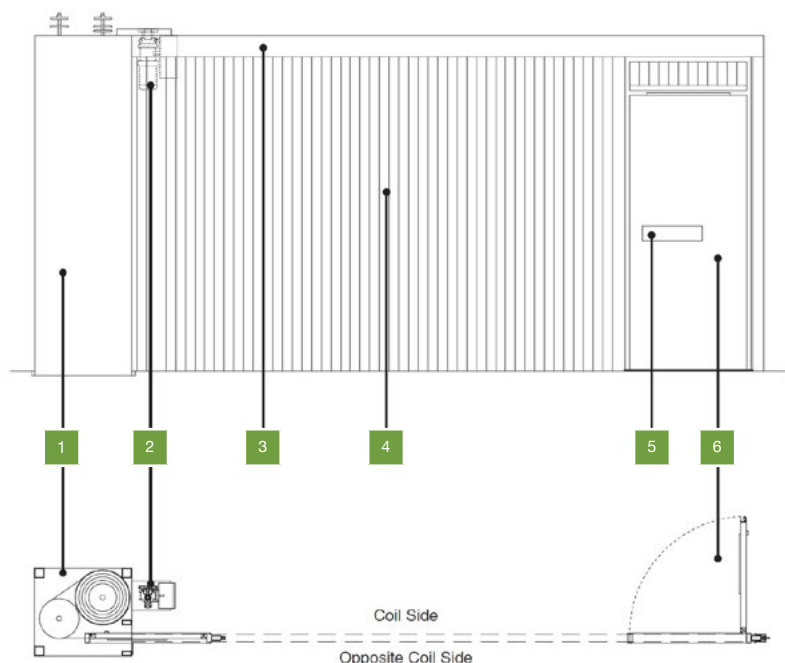

- 1 Coil Box
- 2 Fire Door Motor Operator
- 3 Head Track
- 4 Curtain Slats
- 5 Fire Exit Hardware
- 6 Swing Egress Door

Finishes

McKeon Sterling Gray
Powder coat
Stainless steel

Head Track

Only 175mm high and 40mm wide. Can navigate curves of 900mm radius

Ratings

Up to 3-hour rated to UL 10B*
Smoke & Draft labeled UL 1784

Floor Track

Only required dependant on height, swing door placement and building pressures. Consult with Greene Fire for advice.

Egress

Single or multiple fixed complying egress doors available in the S9000 series when required

38mm high with a 5mm operational slot, with removable cover plate to allow for cleaning.

Model	Open	Self-Close	Egress	Function
S9000	Auto-Set® Operator	Fail-Safe Mechanical	1 Complying Swing Door	Side Coiling

Benefits

- Uses very narrow head track where there is low ceiling space
- Shutter coils up in a small rectangular shape coil box
- Head track does not need to be straight and can follow unique ceiling designs
- Floor track not necessarily required
- Does not require the side pocket to be the full width of the door or for it to be in the same line as the door

Operation

Auto-Set® automatic resetting
Fail-Safe Design - automatic self-closing mechanism does not require power operation



(02) 9526 3100