




FROGLINE LIFELINE

FrogLine SurfaceLink Intermediate Anchor

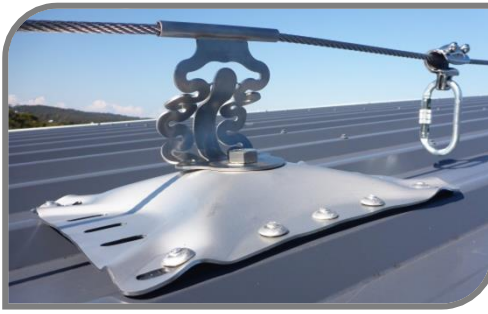

- Energy absorbing lifeline INTERMEDIATE anchor point.
- Specifically for use with permanent horizontal height safety lifeline systems, to be mounted on the surface of a metal roof profile.
- Intended for use with 8mm stainless steel cables.
- Suits pitches no greater than 25 degrees on a multitude of roof profiles.
- Equipped with an engineered energy absorbing region to minimise loads on users and structures in the event of a fall.
- The FrogLine has been rigorously tested and manufactured in accordance with Australia and New Zealand Standard AS/NZS 1891.2 and European EN795:2012, CEN/TS 16415:2013.



What am I used for?

An anchor point designed to be mounted on the surface of a metal roof profile as part of a horizontal lifeline system, to limit lifeline span distances to under ten (10) metres. Fitted where access to the underside of the roof structure is difficult to access.

Product Code: STAT. FROGSAL001

Advance SurfaceLink Plate: Marine Grade Aluminium

COMPONENTS: FROGLINE ALUMINIUM SURFACELINK INTERMEDIATE		
STAT.FROGSAL001.01	FrogLine Intermediate Anchor	1
STAT.FROGSAL001.02	16mm x 35mm Stainless Steel Bolt	1
STAT.FROGSAL001.03	Washer: 70mm O.D. Black Plastic	1
STAT.FROGSAL001.04	Advance SurfaceLink Plate: Marine Grade Aluminium	1
STAT.FROGSAL001.05	Washer: 70mm O.D. Black Plastic	1
STAT.FROGSAL001.06	Washer: 70mm O.D. 316 Stainless Steel	1
STAT.FROGSAL001.07	Nyloc Nut: 16mm 316 Stainless Steel	1
STAT.FROGSAL001.08	Barrier Foam Tape	2

Product Code: STAT. FROGSUR001

Advance SurfaceLink Plate: 316 Stainless Steel

COMPONENTS: FROGLINE STAINLESS STEEL SURFACELINK INTERMEDIATE		
STAT.FROGSUR001.01	FrogLine Intermediate Anchor	1
STAT.FROGSUR001.02	16mm x 35mm Stainless Steel Bolt	1
STAT.FROGSUR001.03	Advance SurfaceLink Plate: 316 Stainless Steel	1
STAT.FROGSUR001.04	Washer: 70mm O.D. 316 Stainless Steel	1
STAT.FROGSUR001.05	Nyloc Nut: 16mm 316 Stainless Steel	1
STAT.FROGSUR001.06	Barrier Foam Tape	2

The building or structure for the anchorages must be assessed by an engineer, unless it is clear to a competent person that the structure is adequate.

- ⚠ **Maximum user per system is Four (4).**
- ⚠ **Maximum person per span is Two (2).**
- ⚠ **See system information for site specific use.**



Installation Video



Installation Guide



Catalogue




HORIZONTAL LIFELINE SYSTEM LAYOUT

This is a guide only

All working at heights safety procedures must be complied with when installing SafetyLink height safety systems. For more information refer to your state or territories current legislation, regulations, policies and codes of practices.



Horizontal height safety lifelines must only be installed and used by competent people with relevant current height safety qualifications.

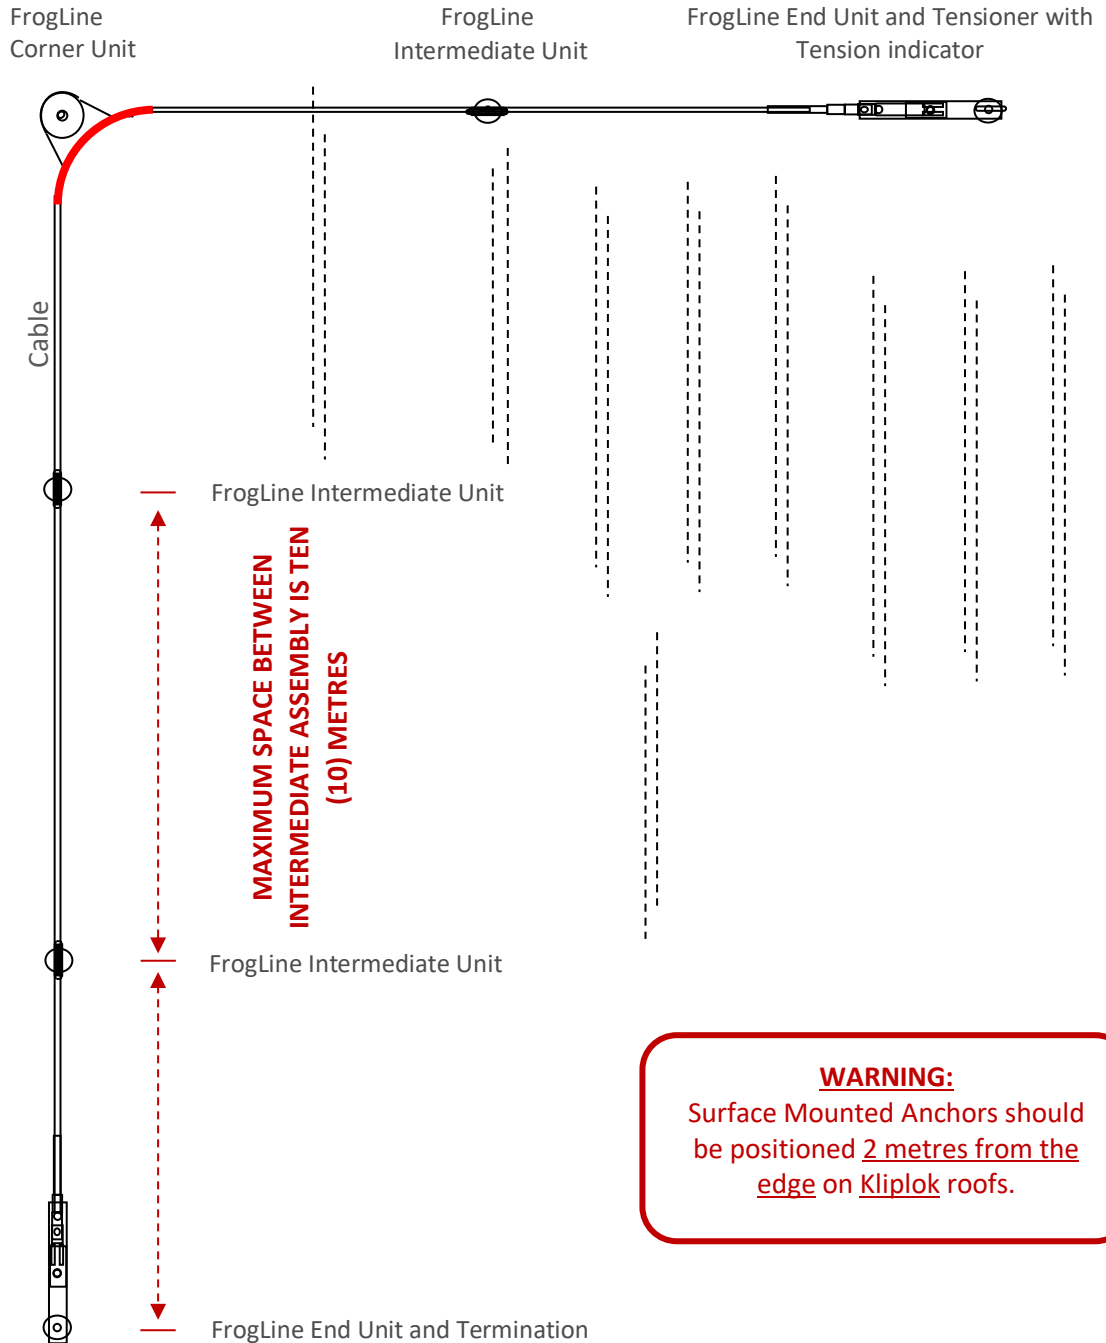

SAFETYLINK HEIGHT SAFETY SYSTEMS MUST ONLY BE INSTALLED AS PER OUR INSTALLATION GUIDES, TO STRUCTURES AS SPECIFIED IN THE INSTALLATION MANUAL FOR EACH PRODUCT. SHOULD ANY DOUBT EXIST IN REGARDS TO THE STRUCTURES INTEGRITY AN ENGINEER SHOULD BE CONSULTED.



COPYRIGHT TERMS AND CONDITIONS



Copyright in the material contained on this disc/email belongs to SafetyLink Pty Ltd. You are authorised to reproduce this material subject to the following conditions:

1. No changes to the material may be made without SafetyLink Pty Ltd's prior written consent, which consent may be withheld, granted, or granted subject to conditions in SafetyLink Pty Ltd's discretion. Change includes any alteration, addition or deletion to the material or a part of the material that you reproduce.
2. You must ensure that any material you reproduce is marked "Copyright – SafetyLink Pty Ltd 2006".
3. Where you reproduce parts only of the material that must not cause the part reproduced to be misleading in any way or omit any important safety information.
4. You indemnify SafetyLink Pty Ltd against any claim arising out of your reproduction of the material on this disc/email or any part of it.
5. SafetyLink Pty Ltd can terminate this authority to reproduce this material on 7 day's notice in writing to you at your last known business address, for any reason. You must return this disc/email to SafetyLink Pty Ltd immediately after such a termination takes effect.

If you do not accept these conditions please return the disc/email to SafetyLink Pty Ltd. Your retention of the disc/email will otherwise be evidence of your acceptance of these conditions.

Patents

SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued.

Should you wish to know the progress of our intellectual property on a specific product please email us on ip@heightsafety.com.au and quote the product code.



Anchor
Catalogue



Anchor
Installation Guide



Lifeline
Catalogue



Lifeline
Installation Guide



Ladder
Catalogue



Ladder
Installation Guide



FrogLink
Install Video



TileLink
Install Video



heightsafety.com
see website for
more videos &
information