



Benchtop & splashback in Haze 2030

Compliance with voluntary safety and environmental standards

CaesarStone's compliance with voluntary safety and environmental standards, include ISO14001, OHSAS18001 and GREENGUARD. CaesarStone Australia is a registered member of the Green Building Council of Australia.



green building council australia
MEMBER

Distributed by
CaesarStone Australia Pty Ltd
ACN 121 819 976

NSW - Sydney Showroom (open 7 days)	1300 119 119
NSW - Head Office	1300 279 927 (+61 2 8197 4900)
Victoria & Tasmania	1300 119 119
Queensland & NT	1300 119 119

Western Australia - Galvin Hardware	+61 8 9446 6700
South Australia - Galvin Hardware	+61 8 8352 1888
New Zealand	+61 2 8197 4900

www.caesarstone.com.au



CaesarStone® is a registered trademark.
NSF Mark and Live Safer are registered trademarks of NSF International.
Printed March 2009. © CaesarStone Australia Pty Ltd 2009
Front cover courtesy of Impala Kitchens, NSW. Photography by Eliot Cohen - Zeitgeist Photography
Inside image courtesy of Noxon Giffen Architects

NOTICE. While every precaution has been taken in the preparation of this document, the publisher and the author assume no responsibility for errors or omissions, or for damages resulting from the use of information contained in this document. In no event shall the publisher and the author be liable for any loss of profit or any other commercial damage caused or alleged to have been caused directly or indirectly as a result of any person relying upon any information contained in this document.

All work carried out by any user of this document on any CaesarStone® slab must be done in accordance with all laws and regulations relating to that work and the slab, and including, but without limitation, occupational health and safety laws and laws relating to the protection of the environment.



CaesarStone Kitchen Splashbacks

Technical and Design Guidelines



CaesarStone splashbacks offer the following:

- Low maintenance, easy to clean, grout free surfaces
- Seamless look, continuity of benchtop colour
- An additional application for 20 mm slab thickness
- Reduced lead times. Same day installation as benchtop
- Waterproof – Ideal behind sinks
- Single contractor for both benchtop and splashback




Benchtop & splashback in Organic White 4600

Where can CaesarStone be used?


- Electric Cooktops**
Freestanding or bench mounted
- Induction Cooktops**

For both electric and induction cooktops we recommend a minimum 50mm clearance from the back edge of the cooktop to the CaesarStone splashback.

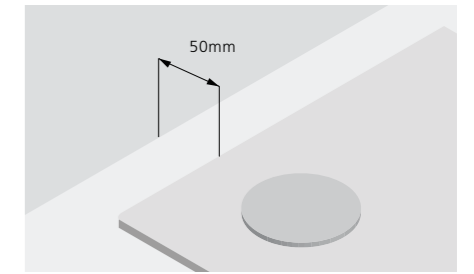

- Gas Cooktops**
Freestanding or bench mounted

For gas cooktops we recommend a minimum 200mm clearance from the periphery of the gas burner to the CaesarStone splashback as per the AS/NZS standards, AS/NZS 4386.2:1996 Domestic Kitchen Assemblies – Installation.

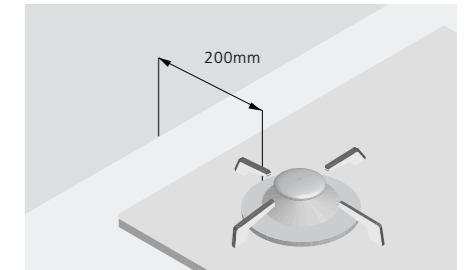

Installation Guidelines


- Timber framed wall construction should use fibre cement sheeting behind CaesarStone splashback applications.
- Brick wall construction should use cement based render behind CaesarStone splashback applications.
- "L" shapes should not be fabricated in one solid piece as this does not allow for movement due to thermal expansion.



When designing or installing splashback applications, Designers & Fabricators must always follow the appropriate Australian & New Zealand standards in regard to clearances especially behind cook tops.

Please refer to:

- AS5601 - 2004 Gas Installations
- AS/NZS 4386.2:1996 Domestic Kitchen Assemblies - Installation
- Cooktop and appliance manufacturers specific installation guidelines.
- All wall and other construction methods should be as per relevant industry guidelines and building codes.

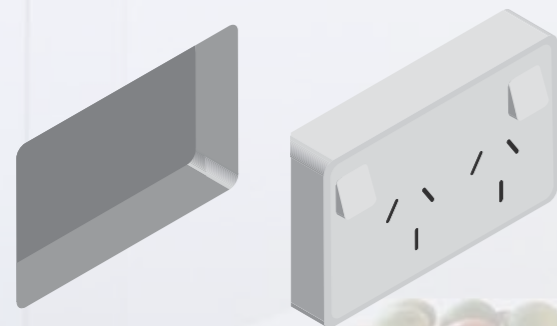

- Cut outs for items such as powerpoints should be core drilled to produce radius internal corners. Cross cutting should be avoided at all times.



- We recommend the use of CaesarStone neutral cure flexible silicone for bonding the splashback to the wall cladding and CaesarStone neutral cure coloured silicone for sealing the joins.

- Items such as utensil racks can be fixed to a CaesarStone splashback. Fixing holes should be drilled using either a diamond drill, tungsten or sapphire tipped drill bits on a slow variable speed with no hammer action. Start with a small hole and gradually increase the diameter to the required size. Use plastic wall plugs and stainless steel screws. The wall plug must not penetrate the wall behind the CaesarStone surface. If the holes are located close to a corner, leave at least 5cm distance between the hole and the edges.

