

TOSHIBA
AIR CONDITIONING

MiNi-SMMS
WHEN COMMERCIAL MEETS RESIDENTIAL



MiNi-SMMS

Toshiba solutions

Toshiba offers a solution for all applications: residential, light commercial and larger commercial buildings. Residential indoor units are designed to blend perfectly with all interiors and incorporate advanced filtration systems to deliver optimum indoor air quality. For small commercial premises, products are designed to deliver top performance combined with energy efficiency.

For larger applications, VRF systems combine flexibility, energy efficiency and respect for the environment, with a wide choice of stylish indoor units.


Absolute comfort

Toshiba's commitment to society drives a company-wide focus on attention to the details through every stage of the development process, from design to user field tests. Installations using our products and systems therefore feature a high standard of indoor air quality, sound levels, energy savings, and environmental awareness.



Energy-efficient performance for greater eco-consciousness

Adopting the highly efficient DC twin-rotary compressors and advanced vector-controlled inverters realize a EER of 5.74 (under 50% partial load, 6HP). Greater operating performance is now possible when operating under a constant load.

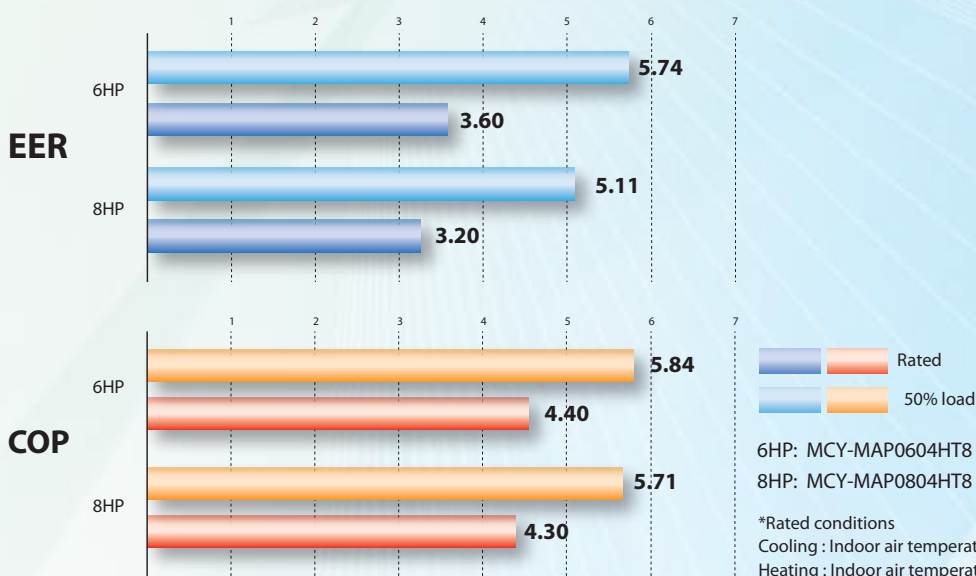

Toshiba's unique energy-efficient air conditioning innovations and technologies deliver high energy savings.

DC fan motor

- Highly efficient DC motor
- Sine wave drive

Heat exchanger

High-efficiency R410A heat-transfer tube




Configuration of the finned heat-transfer tube

Bat wing fan

High-pressure low-volume fan




The bat wing fan realizes low sound level.

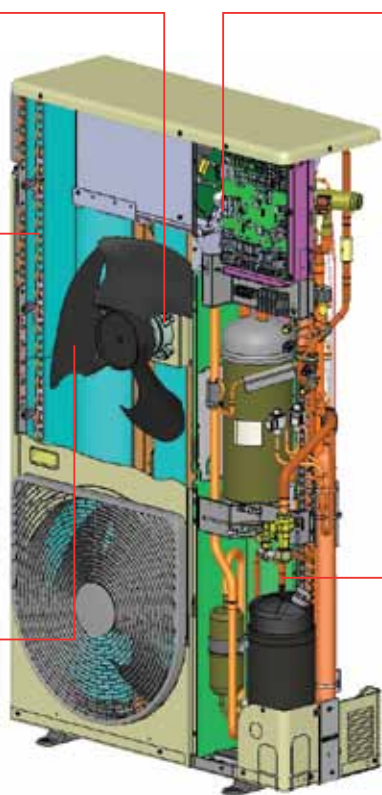

Vector-controlled inverter

The inverter boosts efficiency by controlling R410A and a twin-rotary DC compressor.

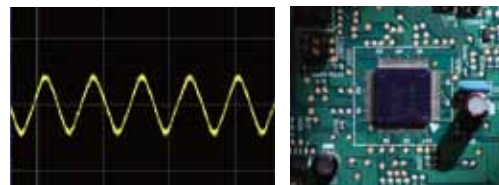

Smooth sine curve realizes higher efficiency and less noise. Efficient circuit built-in; new PIM

Vector IPDU control changes the motor current wave to a smooth sine pattern so that noise emitted from the drive units is greatly reduced.

Twin-rotary DC compressor

Increased, wide range efficiency is realized.



- DC driven motor with rare-earth magnet
- Compact
 - Higher efficiency
 - Higher power motor torque

- Precise manufacturing technology in the compression parts
- Higher efficiency (in wide range)
 - Higher reliability



Controls



Wired Controller
RBC-AMS51E-EN
• Backlight
• Weekly schedule



Wired Controller
RBC-AMS41E (with weekly schedule)
RBC-AMT32E (without schedule)



Simple wired controller
RBC-AS21E2



Remote sensor
TCB-TC21LE2



Wireless remote controller kit & sensor unit (receiver unit)

*The wireless remote control cannot be connected to Concealed duct high static pressure type or Fresh air intake indoor unit type.



RBC-AX32U(W)-E

Integral receiver (For 4-way air discharge cassette) (MMU-AP***2H)



RBC-AX23UW(W)-E

Integral receiver
(For 2-way air discharge cassette)
(MMU-AP***2WH)



RBC-AX32CE2

Integral receiver
(For Ceiling, 1-way air discharge cassette)
(MMU-AP***SH-E, MMC-AP***H-E)



TCB-AX32E2

Stand alone receiver
(For 4-way air discharge cassette, Compact 4-way cassette (600 x 600), 2-way air discharge cassette, Ceiling, Concealed duct standard, Slim duct, Floor standing cabinet, Floor standing, 1-way discharge cassette (MMU-AP***YH-E/SH-E)



ON-OFF controller
TCB-CC163TLE2



Central remote controller
TCB-SC642TLE2



Schedule Timer
TCB-EXS21TLE



Smart Manager
BMS-SM1280HTLE


Outdoor unit specifications



1-phase model

Technical specifications

Equivalent HP		4HP	5HP	6HP	
Model name	50Hz	MCY-MAP0401HT	MCY-MAP0501HT	MCY-MAP0601HT	
Cooling capacity ^{*1}	(kW)	12.1	14.0	15.5	
Heating capacity ^{*1}	(kW)	12.5	16.0	18.0	
Power supply	1-phase 2 wires 50Hz 220 – 240 V				
Efficiency	Cooling	EER (Energy Efficiency Ratio)	4.29	4.03	3.35
	Heating	COP (Coefficient of Performance)	4.61	4.00	3.71
External dimensions (Height / Width / Depth) (Weight)	(mm)	1340 / 900 / 320 (117 kg)			
Refrigerant piping Specifications	Connecting port dia.	Gas side (OD)	(mm)	15.9	19.1
		Liquid side (OD)	(mm)	9.5	
	Total Piping (Liquid pipe)	(m)	180(150 ^{*2})		
	Furthest Piping (indoor to outdoor)	(m)	100(65 ^{*2})		
	Max equivalent length of main pipe	(m)	65(50 ^{*2}) (Outdoor to 1st branch)		
	Furthest Indoor piping to 1st branch	(m)	35m (15 ^{*2}) (Equivalent length)		
Height between indoor and outdoor units	(m)	30m (outdoor above), 20m (outdoor below)			
Max. no. of connected indoor units		6	8	9	
Sound pressure level (Cooling/Heating) ^{*3}	(dB(A))	49/50	50/52	51/53	

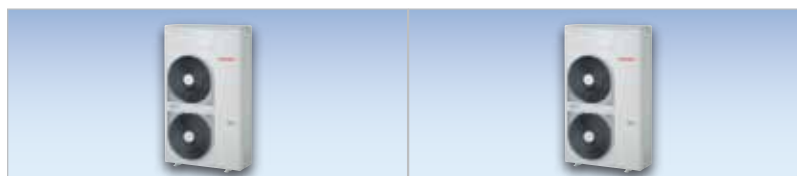

3-phase model

Technical specifications


Equivalent HP		6HP	8HP		
Model name	50Hz	MCY-MAP0604HT8	MCY-MAP0804HT8		
Cooling capacity ^{*1}	(kW)	15.5	22.4		
Heating capacity ^{*1}	(kW)	18.0	25.0		
Power supply	3-phase 4 wires 50Hz 380 - 415V				
Efficiency	Cooling	EER (Energy Efficiency Ratio)	3.60	3.20	
	Heating	COP (Coefficient of Performance)	4.40	4.30	
External dimensions (Height / Width / Depth) (Weight)	(mm)	1540 / 900 / 320 (123 kg)			
Refrigerant piping Specifications	Connecting port dia.	Gas side (OD)	(mm)	19.1	22.2
		Liquid side (OD)	(mm)	9.5	
	Total Piping (Liquid pipe)	(m)	100		
	Furthest Piping (indoor to outdoor)	(m)	50m (Equivalent length: 60m)		
	Max equivalent length of main pipe	(m)	30m (Outdoor to 1st branch)		
	Furthest Indoor piping to 1st branch	(m)	20m (Equivalent length)		
Height between indoor and outdoor units	(m)	15m (Outdoor above or below indoor unit)			
Max. no. of connected indoor units		8	8		
Sound pressure level (Cooling/Heating) ^{*3}	(dB(A))	58/58	58/58		

^{*1} Rated conditions Cooling : Indoor air temperature 27°C DB / 19°C WB, Outdoor air temperature 35°C DB
 Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB / 6°C WB


^{*2} When PMV kit is used

^{*3} Sound pressure levels measured in an anechoic chamber

Indoor units



Cooling capacity (HP equivalent)	4-way air discharge cassette type	Compact 4-way cassette (600 × 600) type	2-way air discharge cassette type	1-way air discharge cassette type
007 type 2.2 kW (0.8HP)		MMU-AP0074MH-E	MMU-AP0072WH	MMU-AP0074YH-E
009 type 2.8 kW (1HP)	MMU-AP0092H	MMU-AP0094MH-E	MMU-AP0092WH	MMU-AP0094YH-E
012 type 3.6 kW (1.25HP)	MMU-AP0122H	MMU-AP0124MH-E	MMU-AP0122WH	MMU-AP0124YH-E
015 type 4.5 kW (1.7HP)	MMU-AP0152H	MMU-AP0154MH-E	MMU-AP0152WH	MMU-AP0154SH-E
018 type 5.6 kW (2HP)	MMU-AP0182H	MMU-AP0184MH-E	MMU-AP0182WH	MMU-AP0184SH-E
024 type 7.1 kW (2.5HP)	MMU-AP0242H		MMU-AP0242WH	MMU-AP0244SH-E
027 type 8.0 kW (3HP)	MMU-AP0272H		MMU-AP0272WH	
030 type 9.0 kW (3.2HP)	MMU-AP0302H		MMU-AP0302WH	
036 type 11.2 kW (4HP)	MMU-AP0362H		MMU-AP0362WH	
048 type 14.0 kW (5HP)	MMU-AP0482H		MMU-AP0482WH	
056 type 16.0 kW (6HP)	MMU-AP0562H		MMU-AP0562WH	



Cooling capacity (HP equivalent)	Concealed duct type	Concealed duct high static pressure type	Slim duct type
007 type 2.2 kW (0.8HP)	MMD-AP0074BH-E		MMD-AP0074SPH-E
009 type 2.8 kW (1HP)	MMD-AP0094BH-E		MMD-AP0094SPH-E
012 type 3.6 kW (1.25HP)	MMD-AP0124BH-E		MMD-AP0124SPH-E
015 type 4.5 kW (1.7HP)	MMD-AP0154BH-E		MMD-AP0154SPH-E
018 type 5.6 kW (2HP)	MMD-AP0184BH-E	MMD-AP0184H-E	MMD-AP0184SPH-E
024 type 7.1 kW (2.5HP)	MMD-AP0244BH-E	MMD-AP0244H-E	
027 type 8.0 kW (3HP)	MMD-AP0274BH-E	MMD-AP0274H-E	
030 type 9.0 kW (3.2HP)	MMD-AP0304BH-E		
036 type 11.2 kW (4HP)	MMD-AP0364BH-E	MMD-AP0364H-E	
048 type 14.0 kW (5HP)	MMD-AP0484BH-E	MMD-AP0484H-E	
056 type 16.0 kW (6HP)	MMD-AP0564BH-E		


PMV kit (available as an option)
 Can be located away from indoor unit to further reduce sound made by refrigerant flow in the piping



Cooling capacity (HP equivalent)	Ceiling type	High-wall type 2 series	High-wall type 3 series	Console
007 type 2.2 kW (0.8HP)		MMK-AP0074MH-E	MMK-AP0073H	MML-AP0074NH-E
009 type 2.8 kW (1HP)		MMK-AP0094MH-E	MMK-AP0093H	MML-AP0094NH-E
012 type 3.6 kW (1.25HP)		MMK-AP0124MH-E	MMK-AP0123H	MML-AP0124NH-E
015 type 4.5 kW (1.7HP)	MMC-AP0154H-E		MMK-AP0153H	MML-AP0154NH-E
018 type 5.6 kW (2HP)	MMC-AP0184H-E		MMK-AP0183H	MML-AP0184NH-E
024 type 7.1 kW (2.5HP)	MMC-AP0244H-E		MMK-AP0243H	
027 type 8.0 kW (3HP)	MMC-AP0274H-E			
030 type 9.0 kW (3.2HP)				
036 type 11.2 kW (4HP)	MMC-AP0364H-E			
048 type 14.0 kW (5HP)	MMC-AP0484H-E			
056 type 16.0 kW (6HP)				



Cooling capacity (HP equivalent)	Floor standing cabinet type	Floor standing concealed type	Floor standing type
007 type 2.2 kW (0.8HP)	MML-AP0074H-E	MML-AP0074BH-E	
009 type 2.8 kW (1HP)	MML-AP0094H-E	MML-AP0094BH-E	
012 type 3.6 kW (1.25HP)	MML-AP0124H-E	MML-AP0124BH-E	
015 type 4.5 kW (1.7HP)	MML-AP0154H-E	MML-AP0154BH-E	MMF-AP0154H-E
018 type 5.6 kW (2HP)	MML-AP0184H-E	MML-AP0184BH-E	MMF-AP0184H-E
024 type 7.1 kW (2.5HP)	MML-AP0244H-E	MML-AP0244BH-E	MMF-AP0244H-E
027 type 8.0 kW (3HP)			MMF-AP0274H-E
030 type 9.0 kW (3.2HP)			
036 type 11.2 kW (4HP)			MMF-AP0364H-E
048 type 14.0kW (5HP)			MMF-AP0484H-E
056 type 16.0 kW (6HP)			MMF-AP0564H-E

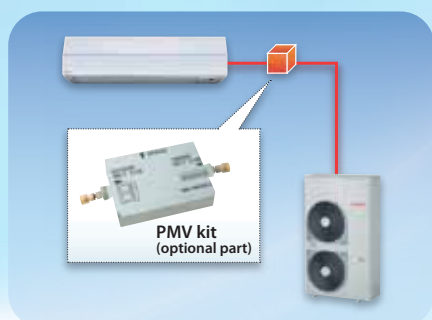



TOSHIBA
AIR CONDITIONING

Notice: Toshiba is committed to continuously improving its product to ensure the highest quality and reliability standards, and to meet local regulations and market requirements.

All features and specifications subject to change without prior notice.

Note: All images provided in this catalogue are used for illustration purposes only.

AHI Carrier (Australia) Pty Ltd

ANB 47136426214

AU22499

Equipment rates in accordance with MEPS 3823.2-2011 E&OE

www.toshiba-aircon.com.au