


A HIGHLY REFLECTIVE AND DURABLE ROLLER SHADE FABRIC

# CR88

## Metallised

- Exceptional performance and durability
- Highly reflective
- Excellent outward visibility
- 100% recyclable

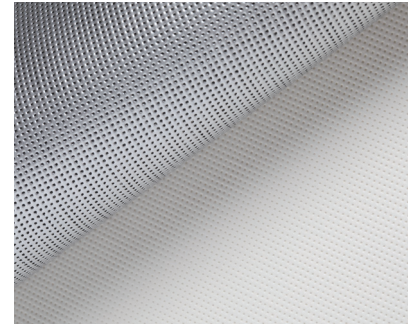

### Suitable for internal installation using:



Roller Shades



Panel Glide Shades



Vertical Shades

Internal installation only.

<b>Openness Factor:</b>	8%
<b>Fabric Width:</b>	267 cm
<b>Thickness:</b>	0.45 mm
<b>Weight:</b>	360 g/m <sup>2</sup>
<b>Composition:</b>	Best practice PVC
<b>Fire Retardancy:</b>	Compliant to AS1530.2 and AS1530.3.

Certificates available on request.

### Fenestration Properties:

	OF	Tuv	Tv	Rv	Ts	Rs	As	G Value: C Glaze	G Value: D Glaze
WHITE	8%	9%	9%	69%	9%	67%	24%	0.35	0.26
ANTHRACITE	8%	9%	7%	63%	8%	61%	31%	0.37	0.27
GREY	8%	9%	8%	67%	9%	63%	28%	0.36	0.26
LIGHT GREY	8%	8%	8%	64%	8%	64%	28%	0.35	0.27
PEWTER	8%	8%	8%	65%	9%	63%	28%	0.36	0.27
BRONZE	8%	8%	7%	63%	9%	62%	29%	0.37	0.27
CHARCOAL	8%	8%	7%	63%	8%	61%	31%	0.38	0.27

Openness Factor / <b>OF</b>
Ultraviolet Transmittance / <b>Tuv</b>
Light Transmittance / <b>Tv</b>
Light Reflectance / <b>Rv</b>
Solar Transmittance / <b>Ts</b>
Solar Reflectance / <b>Rs</b>
Solar Absorption / <b>As</b>
G Value / <b>G tot</b>

G tot: Total solar factor, ratio of the energy transmitted through a window and solar protection device. Classification and reference glazing according to standard EN 14501  
Data is current at time of printing. Please check website for most current information.

### Health Certification:




UL GREENGUARD®  
Gold Certified


Guarantee of indoor air  
quality (VOC)

<b>Light-fastness:</b>	7-8 (Blue Scale) Tested to ISO 105-B02:2014
<b>Sound Absorption:</b>	Alpha-W: 0,35 to 0,8 - NF EN 20354 (ISO 354) - NF EN ISO 11654
<b>Care Instructions:</b>	Handle fabric with care and wear clean gloves. Lightly dust regularly with clean feather duster. A hand-held vacuum with low suction may also be used. When vacuuming, avoid pulling or stretching the fabric. On metallised side, spot clean by gently blotting with a slightly damp cloth. Leave the blind down until completely dry.
<b>Warranty:</b>	5 year warranty as complete roller shade systems for internal use. For more information regarding warranties and extended warranties, please contact Climate Ready Fabrics.
<b>Sustainability:</b>	● 100% recyclable


**Colour Range:**




Grey M2171




White M2044




Light Grey M2048




Pewter M2167



Anthracite M2047



Charcoal M2053



Bronze M2043

Colours are to be used for reference purposes only. For an accurate colour sample, please contact Climate Ready Fabrics for a fabric swatch sample.

© Copyright January 2020 Climate Ready® Fabrics  
 Specification information and other data are based on information available at the time of publication of this document and are subject to production tolerances and/or change without prior notice.