



GLUE DOWN


VINYL PLANK

3MM VINYL PLANK

Serfloor 3mm Glue Down Vinyl Planks are a versatile wood look range that can be used for all commercial and domestic environments.

Serfloor 3mm Glue Down Vinyl Planks are 100% water resistant and designed for durability and low maintenance, it is fit for almost any indoor flooring requirement including all wet areas. It is also scratch and stain resistant, making it suitable for busy homes with pets and young children.

The realistic finishes makes this product look like real timber flooring without the higher price point and maintenance requirements.

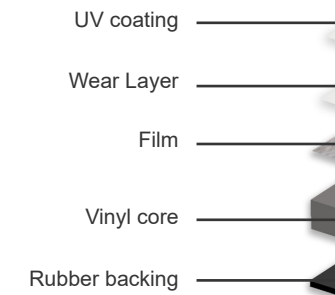

Comfortable under foot



Low VOC emission



Water resistant



Scratch and stain resistant



Sound dampening



Easy to maintain

- Water resistant
- Low VOC emissions contribute to better indoor air quality
- UV coated
- Anti-bacterial surface
- Fire, slip, oil & stain Resistant
- 15 years commercial warranty
- 30 years residential warranty
- Reduces impact & sound travel
- Durable & low maintenance
- Quick & easy installation
- Best choice for allergy sufferers
- Designed for no underlay
- Pets and kids friendly
- Can be installed over most existing floors
- Dry-back. Hard set vinyl adhesive required for installation


SPECIFICATION	STANDARD	RESULT
Total Thickness (mm)	EN 428	3.0mm
Thickness of wear layer (mm)	EN 429	0.5mm (+/- 0.005)
Weight (+/- 50gr/m2)	EN 430	5.637kg/m2
Plank Dimension	EN 427	184.2mm x 1219.2mm
Packing	EN 427	14 Planks / 3.14m2 per box
Dimension Stability	EN 434	<0.25
Colour fastness to light	ISO 105 B02	> 6
Residual Indentation	EN 433	> 0.10mm
Acoustic	ISO 717-2:2013	56 dB
Abrasion resistance	EN 660-2	5.3
Slip Resistance Classification	AS 4586-2013	R10 (>10 <19)
Behaviour to fire	AS/ISO 9239.1-2003	CRF Value: 8.3Kw/M2 Smoke Value: 146%.min
Emission of Formaldehyde	EN 717-2	Not detected
TVOC emission factor	ISO 10580	After 24 hours: .22 m2.m3
Chemical Products	ASTM F925	Pass
Electric Behavior	EN 1081	Pass
Dynamic coefficient of friction	ASTM C1028	Direction A: 0.48 / Direction B: 0.58
Surface treatment	Anti-bacterial	Anti-bacterial, UV protection



FRENCH OAK SFG-3207



SPOTTED GUM SFG-3102

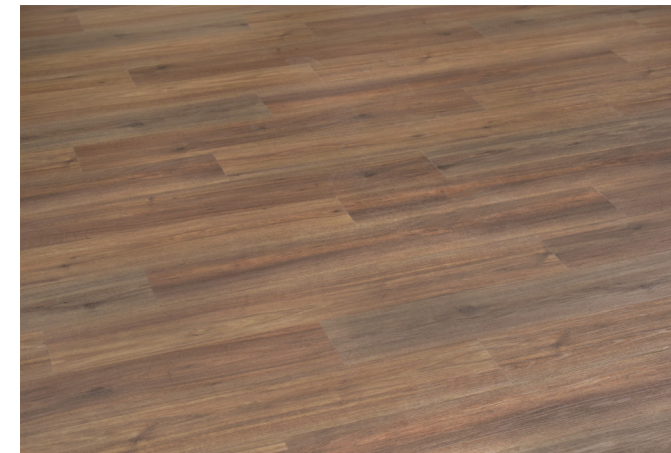

NSW SPOTTED GUM SFG-3103






SILVER OAK SFG-3104



DARK ASH SFG-3201



WESTERN CHARCOAL SFG-3202

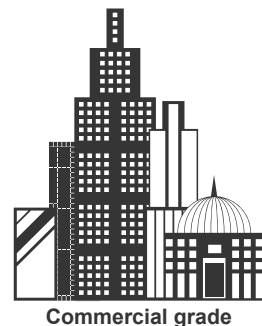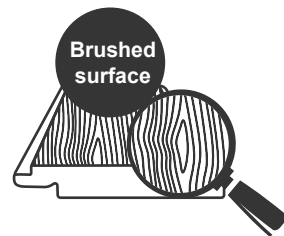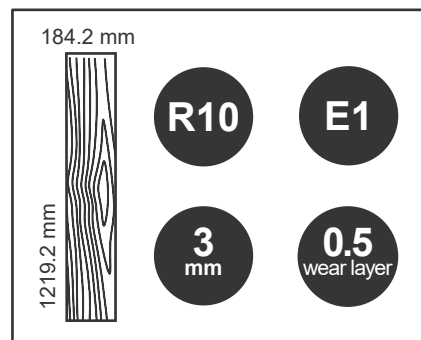

Commercial grade

2MM VINYL PLANK

Serfloor 2mm Glue Down Vinyl Planks are an affordable and elegant option with a realistic wood look design that is a perfect solution for your flooring choice. It has been designed for easy and fast installation over almost any surface without underlay or click system.

Serfloor 2mm Glue Down flooring is dimensionally stable which means it keeps movement in the floor minimal when exposed to extreme temperatures and requires minimal expansion gaps when installing.



Comfortable under foot



Low VOC emission



Water resistant



Scratch and stain resistant






Sound dampening



Easy to maintain

- Water resistant
- Low VOC emissions contribute to better indoor air quality
- UV coated
- Anti-bacterial surface
- Fire, slip, oil & stain Resistant
- Reduces impact & sound travel
- Durable & low maintenance
- Quick & easy installation
- Best choice for allergy sufferers
- Designed for no underlay
- Pets and kids friendly
- Can be installed over most existing floors
- Dry-back. Hard set vinyl adhesive required for installation
- Suitable for all wet areas including bathrooms, laundry and kitchen

SPECIFICATION	STANDARD	RESULT 2MM
Total Thickness (mm)	EN 428	2.0mm
Thickness of wear layer (mm)	EN 429	0.3mm (+/- 0.005)
Weight (+/- 50gr/m2)	EN 430	3.647kg/m2
Plank Dimension	EN 427	184.2mm x 1219.2mm
Packing	EN 427	20 Planks / 4.49m2 per box
Dimension Stability	EN 434	<0.25
Colour fastness to light	ISO 105 B02	> 6
Residual Indentation	EN 433	> 0.10mm
Acoustic	ISO 717-2:2013	56 dB
Abrasion resistance	EN 660-2	5.3
Slip Resistance Classification	AS 4586-2013	R10 (>10 <19)
Behaviour to fire	AS/ISO 9239.1-2003	CRF Value: 8.3Kw/M2 Smoke Value: 146%.min
Emission of Formaldehyde	EN 717-2	Not detected
TVOC emission factor	ISO 10580	After 24 hours: .22 m2.m3
Chemical Products	ASTM F925	Pass
Electric Behavior	EN 1081	Pass
Dynamic coefficient of friction	ASTM C1028	Direction A: 0.48 / Direction B: 0.58
Surface treatment	Anti-bacterial	Anti-bacterial, UV protection

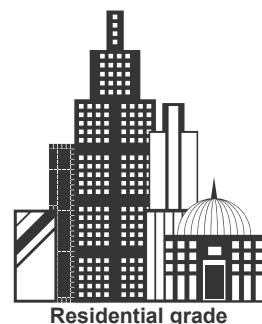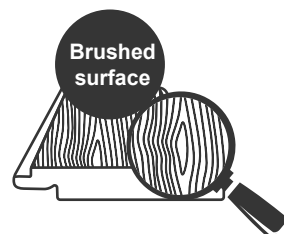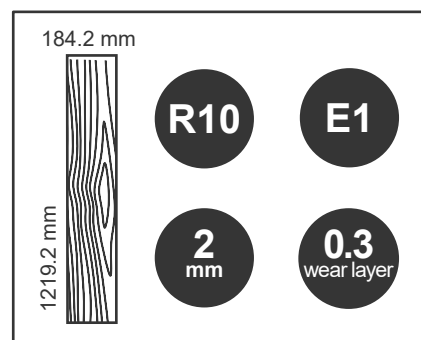

ENGLISH OAK SFG-2101



CARAMEL SFG-2102



CHOCOLATE SFG-2103



SNOWY OAK SFG-2201



GOLDEN OAK SFG-2202



WEATHERED OAK SFG-2203



COLOUR AND PATTERN APPEARANCE

The appearance of colour and pattern can change in different lighting environments or when viewed on a screen or in a brochure. For this reason, we highly recommend you view a sample of the product you are interested in before making your final decision.

Just like real timber, the patterns in our products can have natural variations. If in doubt, please ask your local stockist for a larger sample of the product.

Colour and pattern trends do change and in order to continue supplying our customers with the latest colours and styles, products are sometimes withdrawn at short notice. If this happens, we will always do our best to help you find a colour and pattern you will love just as much.

CONTACT US



info@serfloor.com.au



(03) 9796 4626



1/151-159 Princes Hwy,
Hallam, VIC 3803



Follow us
[@serfloor.australia](https://www.instagram.com/serfloor.australia)

[SERFLOOR.COM.AU](https://www.serfloor.com.au)