



rba

FLOOR MOUNTED DRINKING FOUNTAIN



RBA8903-100 & RBA8903-150

Materials & Features

Floor Mounted Drinking Fountains are manufactured from heavy-gauge, 1.6mm, type 304 stainless steel with all exposed surfaces in satin finish. Smooth radiused design eliminates sharp corners.

Height:

RBA8903-100: Fountain rim is 915mm above FFL.

RBA8903-150: Fountain rim is 760mm above FFL.


Outlet: Integral perforated drain. Furnished with 40mm BSP waste connection.

Bubbler: Supplied with chrome plated, shielded bubbler with self-closing push button valve. Valve includes flow adjuster and strainer. Water inlet connection is 10mm compression fitting.

Installation

Mount unit to floor using bracket provided. Floor bracket anchors provided by others. Laser cut, flush-fitting access panel is incorporated in side of the unit and held in position by security screws. Do not rough in without certified dimensions.

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

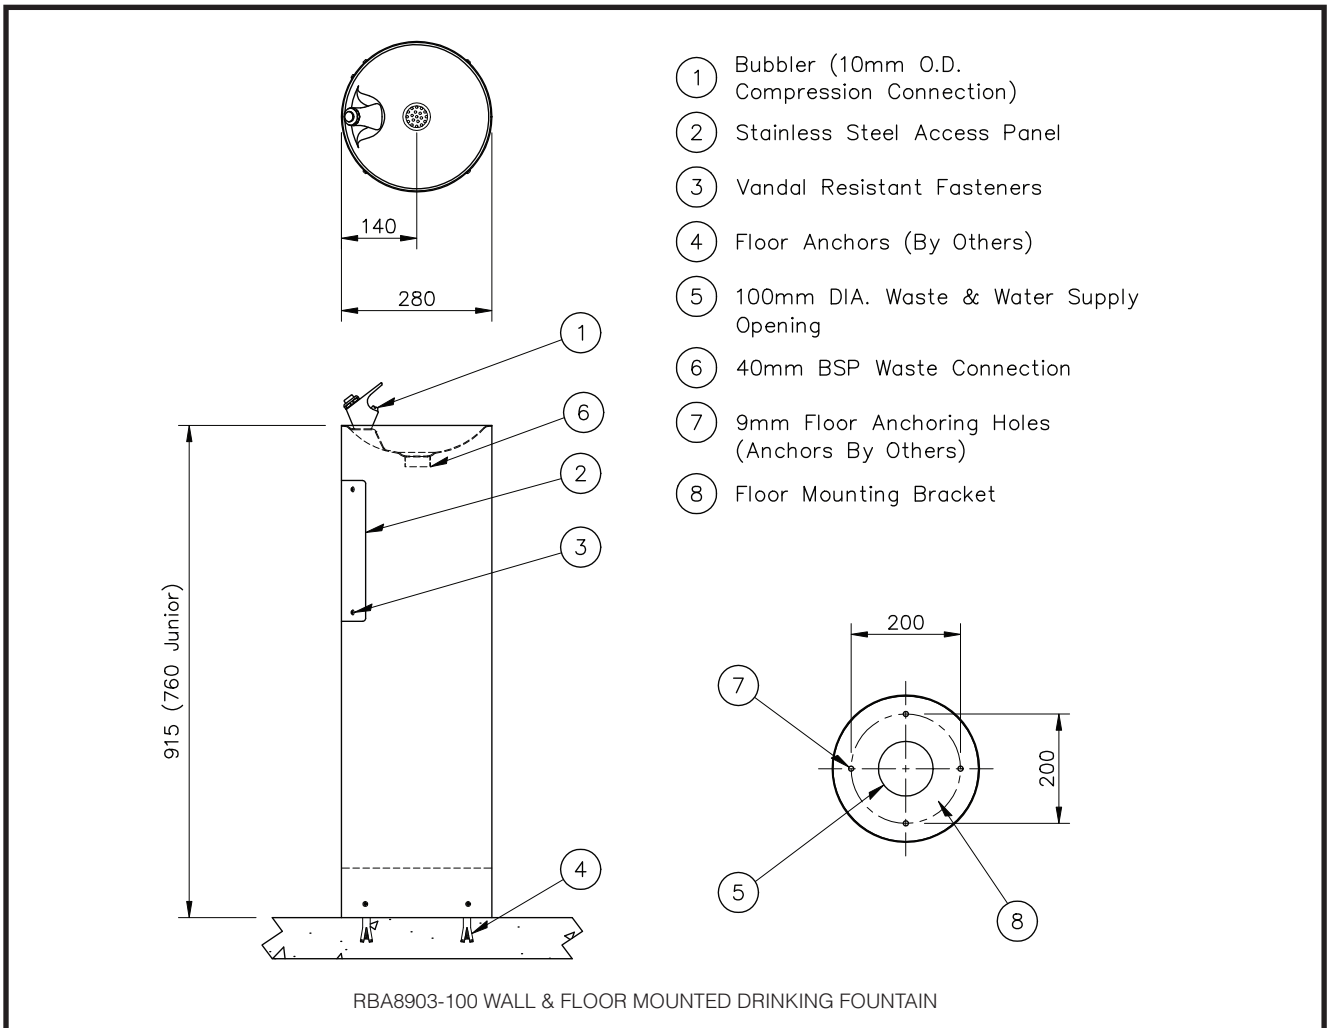

RBA8903-100 WALL & FLOOR MOUNTED DRINKING FOUNTAIN

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 01/11 Printed in Australia © 2011 by RBA Group TD/Model RBA8903-100/RBA8903-150/0111