


LOOSE LAY

SHORTBOARD

LOOSE LAY SHORTBOARD

Serfloor Loose Lay is a premium and elegant option that has the realistic appearance of natural timber combined with the simple maintenance of vinyl flooring. Designed for easy and fast installation on almost any surface with adhesive and without the need for underlay or expansion gaps.

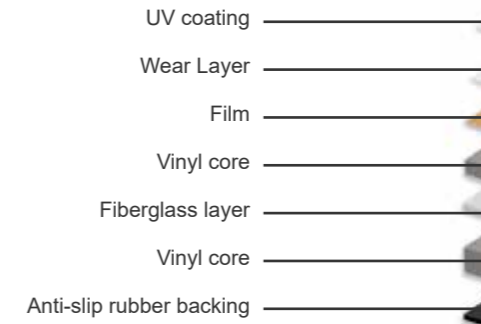

- Fiberglass core for improved Stability
- Non Slip Backing
- Durable & Low Maintenance
- Quick & Easy Installation
- Designed for No Underlay
- Best choice for Allergy Sufferers
- 15 Years Commercial Wear Warranty
- 30 Years Residential Wear Warranty
- Water Resistant
- Low VOC emissions contribute to better indoor air quality
- Anti-Bacterial Nano Silver Technology
- Micro Ceramic Surface
- PU/UV Coated
- Fire, Slip, Oil & Stain Resistant
- Reduces Impact & Sound Travel

| SPECIFICATION | STANDARD | RESULT |
|---------------------------------|-------------------------------|----------------------------------------------|
| Total Thickness (mm) | EN 428 | 5.0mm |
| Thickness of wear layer (mm) | EN 429 | 0.5mm (+/- 0.005) |
| Weight (+/- 50gr/m2) | EN 430 | 9.23kg/m2 |
| Plank Dimension | EN 427 | 177.8mm x 1219.2mm |
| Packing | EN 427 | 10 Planks/2.167m2 per box |
| Accoustic Rating | EN ISO 717-2 | 53 dB |
| Colour fastness to light | ISO 105 B02 | > 6 |
| Residual Indentation | EN 433 | > 6 |
| Castor chair test | ISO 4918 | No Change / delamination |
| Abrasion resistance | ASTMD3884 | 0.1% Loss |
| Slip Resistance Classification | AS 4586-2013 | R10 (>10 <19) |
| Behaviour to fire | AS/ISO 9239.1-2003 | CRF Value: 6.7Kw/M2 Smoke Value: 165%.min |
| Chemical products | ASTM F925 | PASS |
| Electric behavior | EN 1081 | PASS |
| Emission of Formaldehyde | ISO 10580 (<10 (24H) UG.M2.H) | <2.3 (24H) UG.M2.H |
| TVOC emission factor | ISO 10580 | After 24 hours: .22 m2.m3 |
| Dynamic coefficient of friction | EN 13893 | Longitude: 4 / Width: 9 |
| Surface treatment | PU/NANO SILVER | PU & Anti-bacterial, per design |



Comfortable under foot



Low VOC emission



Water resistant



Scratch and stain resistant



Sound dampening



Easy to maintain



COASTAL OAK SF-6224



LIMEWASH SF-6731



GREY ASH SF-6880



SMOKEY GUM SF-6873



GREY OAK SF-6051



CHARCOAL SF-6727



SPOTTED GUM SF-6870



BLACKBUTT SF-6061



KEMPAS SF-6046





NSW SPOTTED GUM SF-6872




ANTIQUA OAK SF-6702



TASMANIAN OAK SF-6121

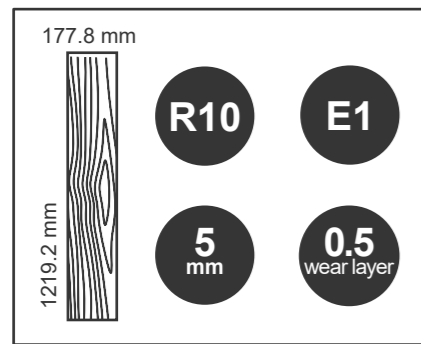

Commercial grade



Brushed Surface



COLOUR AND PATTERN APPEARANCE

The appearance of colour and pattern can change in different lighting environments or when viewed on a screen or in a brochure. For this reason, we highly recommend you view a sample of the product you are interested in before making your final decision.

Just like real timber, the patterns in our products can have natural variations. If in doubt, please ask your local stockist for a larger sample of the product.

Colour and pattern trends do change and in order to continue supplying our customers with the latest colours and styles, products are sometimes withdrawn at short notice. If this happens, we will always do our best to help you find a colour and pattern you will love just as much.

CONTACT US



info@serfloor.com.au



(03) 9796 4626



1/151-159 Princes Hwy,
Hallam, VIC 3803



Follow us
[@serfloor.australia](https://www.instagram.com/serfloor.australia)

SERFLOOR.COM.AU