

nora[®] **nTx** The revolutionary fast installation system





nora® nTx - The advantages at a glance

The benefits of nora® nTx:

- Fast and secure installations in just a few steps
- No drying or waiting time
- Minimal potential for error

Cover more area in less time/with fewer staff



Henri Meyer, Installation Company Max Hofman, Neutraublingen, Germany



What convinced me:

- Installation during day-to-day business
- Can be walked on and used immediately
- Minimisation of downtime


Savings in time and costs

Sascha Bassauer, Facility Manager WHG, Weinheim, Germany

Application options:




Mineral subfloor



With increased residual moisture*

*Illustrative





Floor on Floor**

The revolutionary fast installation system nora® nTx:

As simple as it's ingenious - nora® nTx already has its adhesive power applied in the factory. In just a few steps the floor is installed cleanly and securely so that it can be used immediately. This can be on the normal concrete or cement subfloors or also on top of other existing floor coverings.

Practical example:

Fast renovation during day-to-day business in the "Glückauf" nursing and care centre in Benndorf: No dirt, no noise and above all no disturbance for the residents. With the new nora® nTx rapid installation solution from nora® systems, the flooring in the day room and corridors of the nursing and care centre was renovated in the shortest possible time. The team from Marschalek specialist painters installed the noraplan® sentica nTx rubber flooring directly on top of the old PVC covering.

As the wards could not simply be closed for the renovation work, the rapid floor refurbishment using nora® nTx was the perfect solution. All areas could be used at all times apart from the 90 minutes for the primer to dry. Additional advantages for installers: They get all the products they need all the products from the one source, which gives considerable reductions in the number of potential flaws.





"Refurbishing the flooring with nora® nTx took just two days instead of a week and a half. Moreover, the work was no more expensive for the home than a classic installation."

Installer, Steffen Marschalek





"I cannot possibly allow wards to be shut for long periods of time for renovation work" So rapid floor refurbishment with nora® nTx was the perfect solution for us."

Petra Günther, Director of the "Glück auf" nursing and care centre, Benndorf

How is it installed on an existing floor covering?

Installation using the example of noraplan® nTx "floor on floor":














Complete system from one source

For perfect preparation of the subfloor we offer our nora® nTx installation materials and tools, which have been developed especially for installing nora® nTx floor coverings. As the installation materials are perfectly geared to the floor coverings, functional safety and the highest quality standards are ensured.

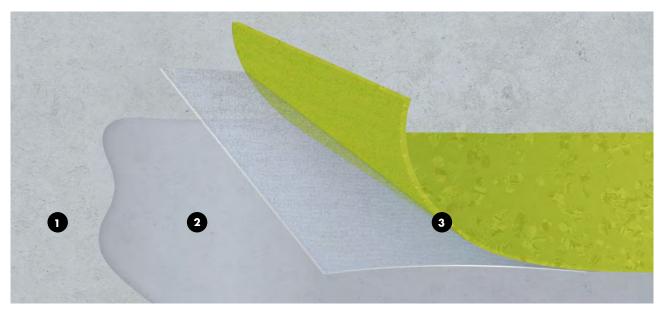

1 Subfloor 2 Primer (nora® nTx 020) 3 nora® nTx covering

Buy with confidence

Technical service

There are nora technicians with their expert knowledge on hand to answer any questions about the installation of nora® nTx during the entire process - also on site.

Renowned nora quality

You will also receive the usual nora quality with nora® nTx. Just like with wet adhesives, nora offers a full five year warranty for nora® nTx.



Low emissions - Indoor Air Comfort Gold

The complete system of nora® nTx rubber flooring coverings and installation materials is certified with Indoor Air Comfort GOLD. As a result, developers and planners can select reliable, sustainable products and use them with the security that the indoor air will not be adversely affected by impurities after the individual materials have been used.

Eurofins Indoor Air Comfort Gold certification combines the emission requirements of the major European quality seals in a single certificate.



noraplan® nTx - available designs noraplan® signa nTx 2945 2944 2780 2931 2937 Art. 156A ◯ ~1.22 m x 14.8 m **₹~2.1 mm** noraplan® sentica nTx 6505 6506 6520 6522 6517 Art. 1633 ~1.22 m x 14.8 m **▼**~2.1 mm norament® nTx - available designs norament® 926 grano nTx 4880 4882 4879 4878 4870 4884 Art. 3111 \square ~1004 mm x 1004 mm **→**~3.6 mm norament® 926 serra nTx norament® 926 satura nTx 5106 5102 4821 4930 Art. 3111 Art. 3112 \square ~1004 mm x 1004 mm \square ~1004 mm x 502 mm ~3.6 mm ₹ ~3.6 mm

Note: Additional designs and information on nora® nTx can be found at www.nora.com or on request.

nora systems Shanghai Co. Ltd.

10 A/B, Long Life Building | 1566 Yan'an Road West | 200052

Shanghai, PR China

Tel.: +86 21 - 3226 0077 | Fax: +86 21 - 5258 1958

www.nora.com/cn

nora systems GmbH (DMCC Branch)

2008 HDS Business Centre | Jumeirah Lakes Towers | PO Box

478392 | Dubai, UAE

Tel.: +971 (4) 450 8175 | Fax: +971 (4) 450 8374

E-Mail: info@nora.com www.nora.com/corp

nora flooring systems UK Ltd.

4-5 Allerton Road | Rugby CV23 OPA, Great Britain Direct Dial Numbers: (01788) 513 160 - 513 169

Fax: (01788) 55 28 12 E-Mail: info-uk@nora.com www.nora.com/uk

nora systems GmbH

Höhnerweg 2-4 | 69469 Weinheim, Germany

Tel.: +49 (0) 6201 - 80 66 33

E-Mail: info@nora.com www.nora.com