

ROLLER SHADE FABRIC
MADE FROM RECOVERED OCEAN BOUND PLASTIC

Climate Ready.
Fabrics

SEA-TEXTM

Non Metallised

Sea-Tex[™] is made with 50% recovered ocean bound plastic (approx. 125 grams per square meter) which equates to an average to large size commercial project using approximately 480kg of recovered ocean bound plastic. Available in five colours, 100% recyclable, fire retardant and PVC free.



Suitable for internal installation using:					
		anel Glide Shades	Vertical Shades		Internal installation only.
Openness Factor:	3%				
Fabric Width:	300 cm				
Thickness:	0.45 mm				
Weight:	250 g/m ²				
Composition:	50% post-con	sumer rec	cycled content (recove	red ocean bound plastic)	
	50% virgin po	lyester			
Fire Retardancy:	Compliant to A	AS1530.2	and AS1530.3.		

Certificates available on request.

Fenestration Properties:

	ó	43 ⁴	4	&≥	19	80	P S	2 C	20 0 20 0 20 0 20 0 20 0 20 0 20 0 20 0
WHITE	3%	8%	31%	62%	31%	59%	10%	0.38	0.26
SAND	3%	5%	22%	53%	26%	55%	19%	0.39	0.26
PEARL	3%	5%	13%	34%	23%	47%	30%	0.42	0.27
HAZE	3%	7%	19%	45%	26%	52%	22%	0.40	0.26
GRAPHITE	3%	5%	5%	9%	19%	31%	50%	0.47	0.28
BLACK	3%	4%	3%	4%	12%	24%	64%	0.54	0.28

G tot: Total solar factor, ratio of the energy transmitted through a window and solar protection device. Classification and reference glazing according to standard EN 14501

Data based on information available at the time of publication of this document and is subject to modification.

Openess Factor / OF
Ultraviolet Transmittance / Tuv
Light Transmittance / Tv
Light Reflectance / Rv
Solar Transmittance / Ts
Solar Reflectance / Rs
Solar Absorption / As
G Value / G tot

Environmental and Health Certification:



Cradle to Cradle Certified™ Bronze Certified.

A globally recognized measure of safer, more sustainable products



UL GREENGUARD ®
Gold Certified

| Guarantee of indoor air qualit




Recycled Claim Standard (RCS)

A chain of custody standard to track recycled raw materials through the supply chain

Light-fastness:	5-6 (Blue Scale) Tested to ISO 105-B02:2014			
Sound Absorption:	Alpha-W = 0.30 sound absorption class: D (ISO354:2003 & ISO11654:1997)			
Care Instructions:	Handle fabric with care and wear clean gloves. Lightly dust regularly with clean feather duster A hand-held vacuum with low suction may also be used. When vacuuming, avoid pulling or stretching the fabric. On metallised side, spot clean by gently blotting with a slightly damp clot Leave the blind down until completely dry.			
Warranty:	5 year warranty as complete roller shade systems for internal use. For more information regarding warranties and extended warranties, please contact Climate Ready Fabrics.			
Sustainability:	 50% post-consumer recycled content (recovered ocean bound plastic) 100% recyclable PVC-free 			

Colour Range:

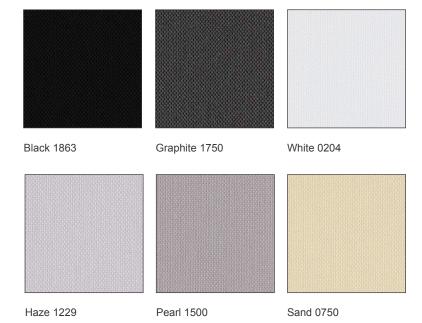

Colours are to be used for reference purposes only.
For an accurate colour sample, please contact Climate Ready Fabrics for a swatch sample.

© Copyright December 2020 Climate Ready® Fabrics
Specification information is based on information available at the time of publication of this document and is subject to modification.

