




**JEHBCO MANUFACTURING PTY LTD**

ABN 98 002 331 704

PO BOX 78 BROOKVALE, NSW 2100, AUSTRALIA

[www.jehbco.com.au](http://www.jehbco.com.au)

## ***SILICONE SPONGE SHEET & STRIP*** ***WITH ADHESIVE BACKING***

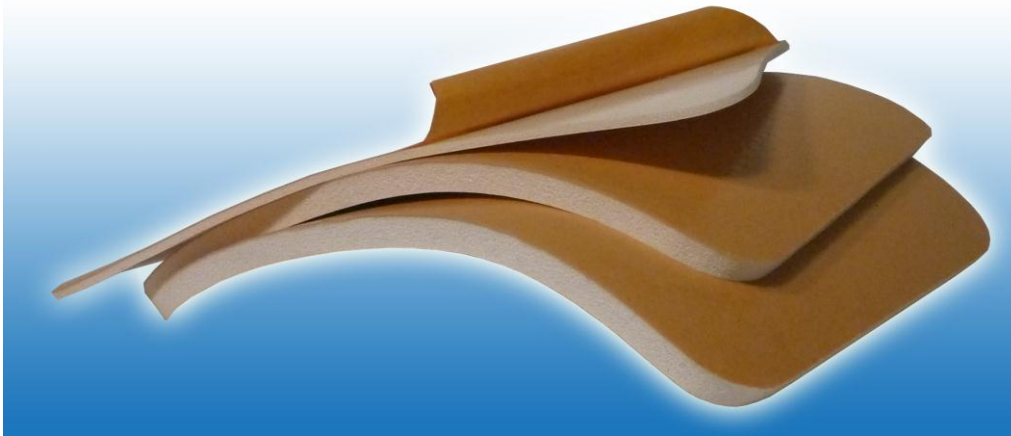

Jehbco Silicone Sponge is predominately closed cell and has an integral surface skin that leads to very low Water absorption.

**General Characteristics:** this product combines properties of resilience; general inertness; high compressibility; acoustic insulation; low compression set; stability over a wide temperature range; unaffected by aging and degradation from sunlight and ozone.

**Typical Applications:** It is due to its combined properties that our Silicone Sponge Sheet can be used in thermal insulation; high and low temperature acoustic insulation; and high and low temperature gaskets and seals.

\* Standard Colour: Off White – other colours possible upon request.

\*\* Available in thicknesses of: 1.5, 3.0, 5.0 and 6.0mm.

PROPERTY	NORM	TYPICAL VALUE
TEMPERATURE RESISTANCE		-60°C / +200°C CONTINUOUS
COMPRESSION SET (%) 22hrs@ 100° C 25% COMPRESSION	BS EN ISO 1856 'A' 1857	15 % MAX
COMPRESSION STRESS @ 40% STRAIN	BS 4443 PART 1 METHOD 5B	90 (+/- 40)
TENSILE STRENGTH	BS 903 PART 2	TYPICAL VALUE 1.3 Mpa
ELONGATION AT BREAK (%)	BS 903 PART A2 15% MAX	TYPICAL VALUE 207%
DENSITY (Kg/m <sup>3</sup> )	BS 4443 PART A1 METHOD 1	300 (+/- 100)

