



TECH DATA | 2 - 4mm Rubber Flooring

CHARACTERISTICS	STANDARD	UNIT	REQUIREMENTS	NATURA/ KAYAR	UNI	GRANITO	GRANITO ELASTIC	GRANITO ESD	GRAIN	BS CLASSIC	BS STRONG	ZERO.4
WEIGHT		Kg/ m ²		4.9	5.2	3.3	4.8	3.3	4.8	3.8	5.2	4.9
ROLL SIZE		m		1.90 x 10						500 x 500mm	1000 x 1000mm	1000 x 1000mm
THICKNESS		mm		3mm	3mm	2mm	4mm	2mm	3mm	2.7mm	4mm	3mm
HARDNESS	ISO 7619	Shore A	≥ 75	85 ± 5	85 ± 5	88 ± 5	85 ± 5	85 ± 5	90 ± 5	90 ± 5	90 ± 5	90 ± 5
RESIDUAL INDENTATION	EN 433	mm	≤ 0.15 ≤ 0.20 ≤ 0.25	0.08	0.08	0.05	-	0.08	-	0.08	0.12	-
ABRASION RESISTANCE	ISO 4648 (Met. A- 5N)	mm ²	≤ 250	190	165	150	170	160	160	140	140	140
DIMENSIONAL STABILITY	EN 434	%	± 0.40 max	± 0.30								
FLEXIBILITY	EN 435 Met. A (Ø 20mm)		No fissuring	COMPLY								
COLOUR FASTNESS TO ARTIFICIAL LIGHT	ISO 105-B02 Met. 3	Degree	≥ 6 blue scale, ≥ 3 grey scale	COMPLY								
CIGARETTE BURN	EN 1399	Rating	Met. A ≥ 4 Met. B ≥ 3	COMPLY								
FIRE RESISTANCE	AS/ISO9239-1		COMPLY	MEETS ALL BCA – NCC REQUIREMENTS								
SLIP RESISTANCE	AS4586-1999			R9								
STAIN RESISTANCE	EN 423			Resistant								
ELECTROSTATIC CHARGE	EN 1815	kV		≤ 2								
REDUCTION OF SOUND DUE TO TREADING	ISO 10140-3	dB (approx.)		10	10	6	20	6	10	8	10	8
CASTOR CHAIRS	EN 425			Suitable for Wheel castors *W* as stated in EN STANDARD 12529 2 Pack adhesive is strongly recommended in high stress areas.								
ELECTRICAL BEHAVIOUR	EN 1081 Met. A	ohm		≤ 10 ⁹								



Complimentary technical advice and sample service available | For local personal service phone freecall 1300 786 585
Please enquire of your Spectrum representative to ensure material availability | Allow 8-10 weeks delivery (on some colours)

Installation | Correct installation is an important part of a successful project. To facilitate installation the underside of the flooring is sanded. All products should be installed in accordance with AS1884-2012 and good trade practice. Detailed laying instructions and water based non toxic adhesive recommendations are available on request.

Maintenance | Easy maintenance using environmentally safe materials to high European standards should be performed dependent on site conditions. Detailed cleaning instructions are available for each product on request.

© Copyright Aug 2013 | This information is correct at the time of printing 8/13, the manufacturer reserves the right to carry out modifications aimed at product improvement without notice.





004 Black



507 Helios



837 Python



804 Metal



820 Pearl



G 804 Grey



510 Orange




510 Orange




120 Desert




265 Steel

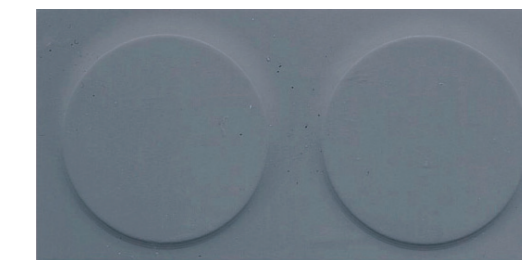


811 Silver

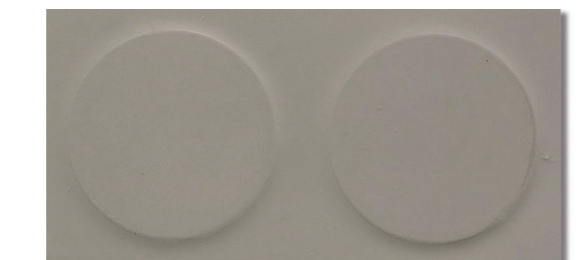


805 Dark Grey

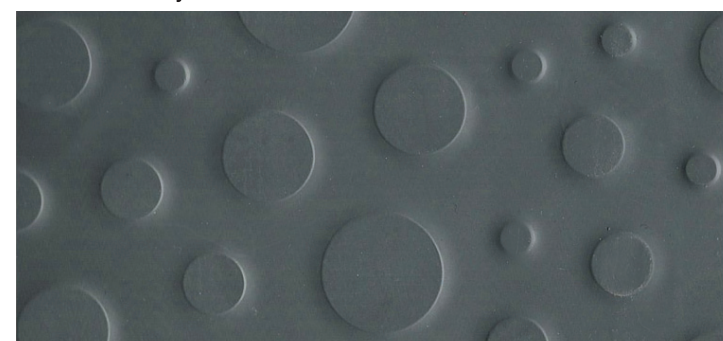

922 Red

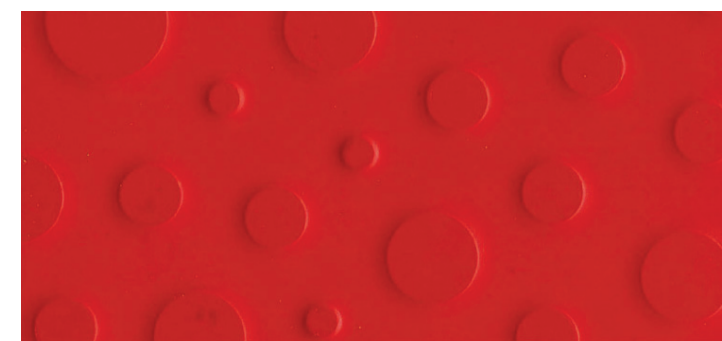


922 Cherry

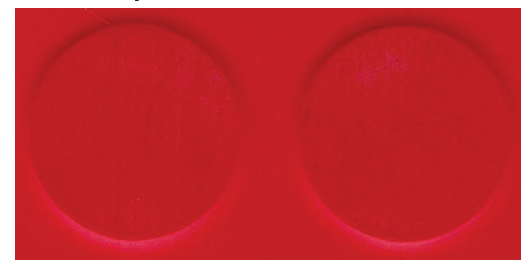


700 Sage




264 Cloud

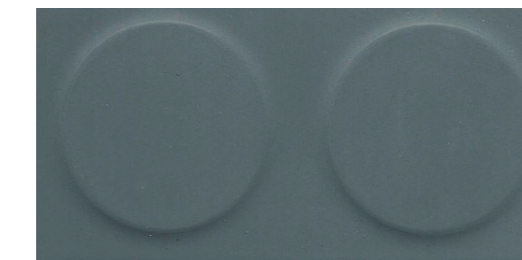


805 Eiffel

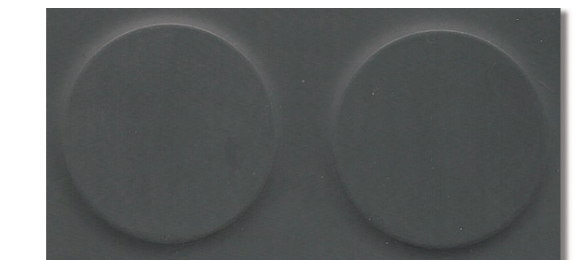


207 Navy

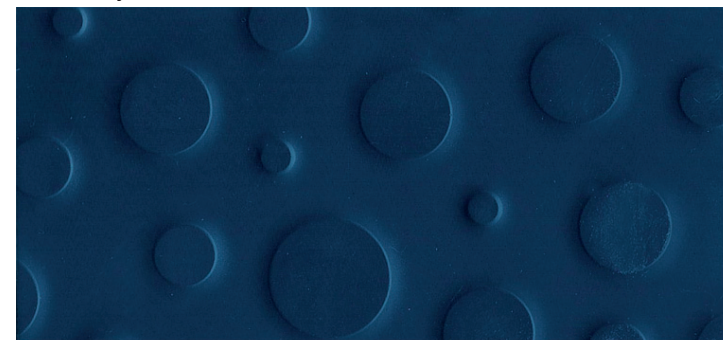


960 Maroon

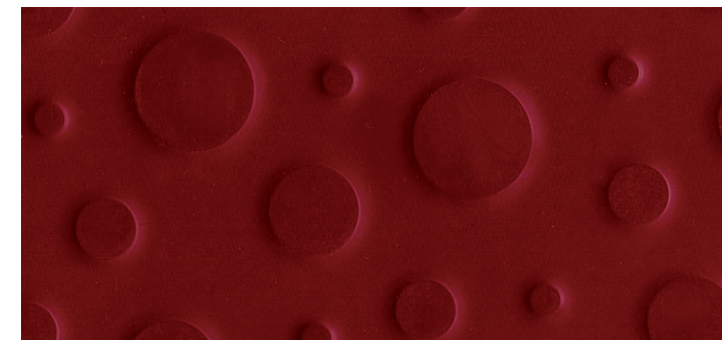


904 Orca

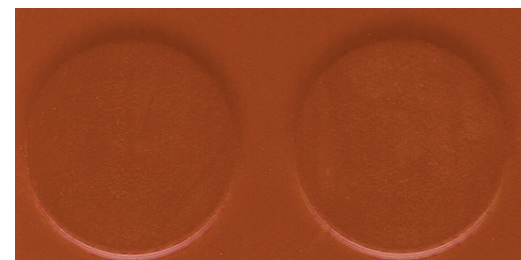


733 Nile

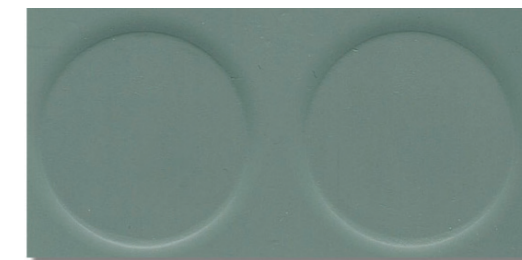


207 Jeans

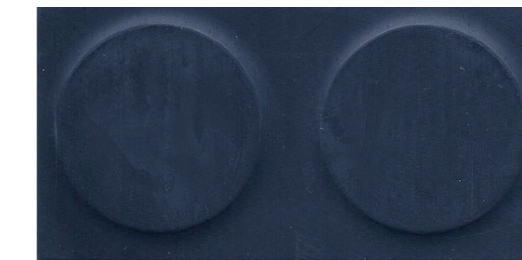


847 Slate

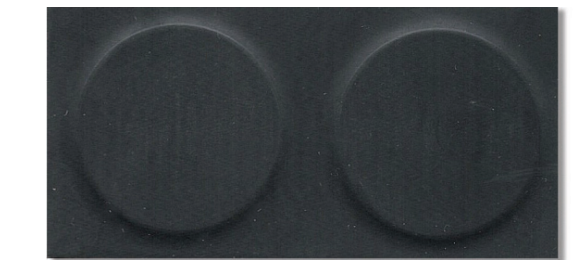


104 Choco

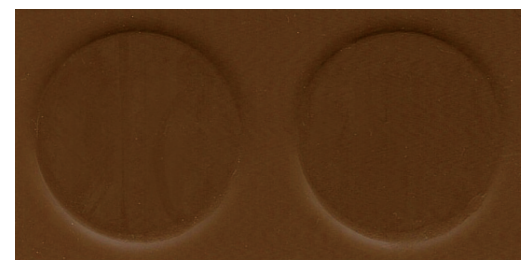

709 Mint

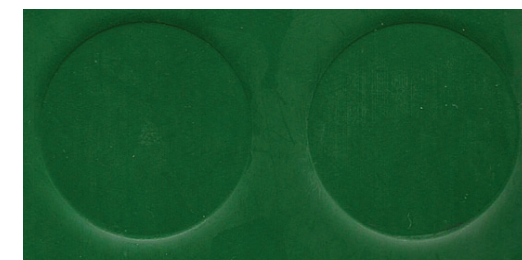

206 Capri

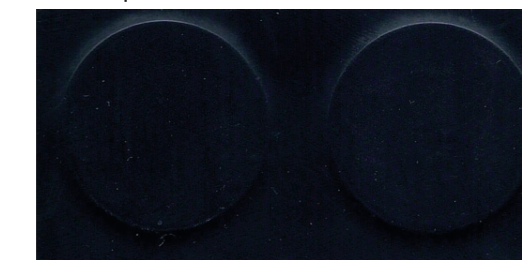

004 Carbon

