




# FRONT FIXED SECURITY SHOWER PANEL

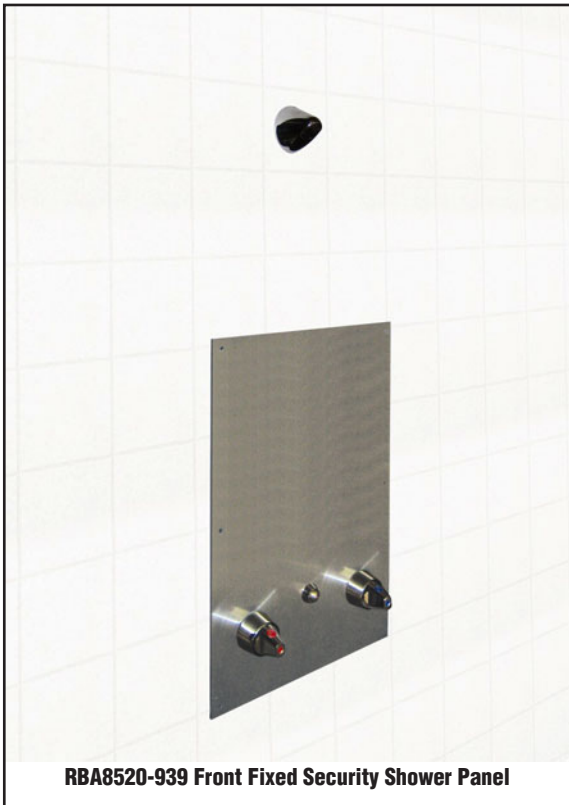

### Installation


RBA8520-939 is provided complete with H&C recess cocks for user adjustable temperature control, and a self closing pneumatic push button activated valve. Closing time is adjustable at time of installation. It can be used for new installations, or converting existing uncontrolled showers to timed self closing, retaining the ability of the user to adjust the temperature. Connection to both hot and cold water is required.

Unit is front fixed with security type fasteners supplied by others, into rough wall opening 480 x 270 and 95 mm deep.

### Connections

1/2" male BSP connection, with flexible braided S/S hoses, supplied by others. Shower rose connection is 1/2" BSP female.

Pressure range should be between 350 and 500 kPa.

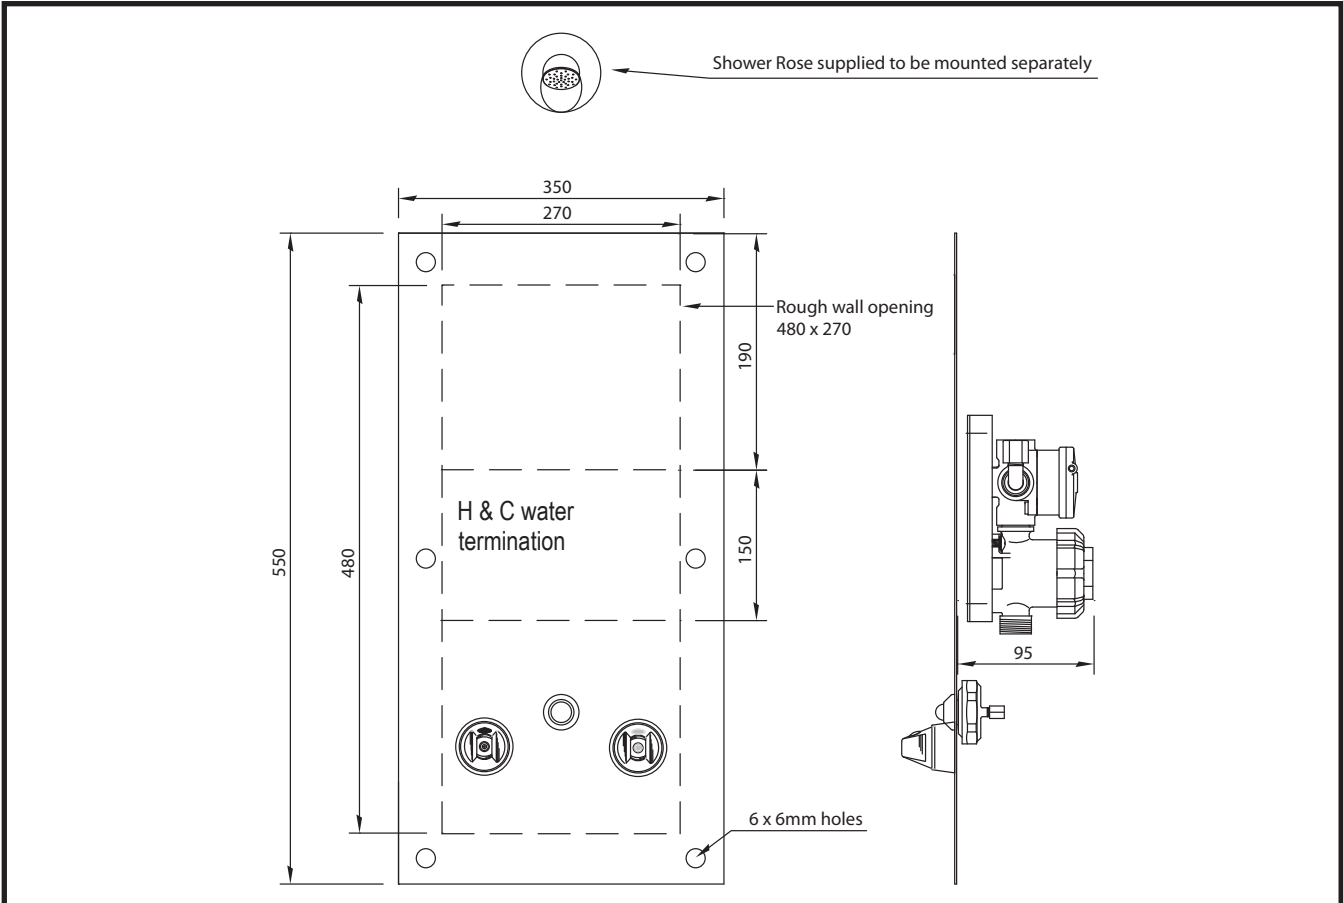

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 07/11 Printed in Australia © 2011 by RBA Group Pty Ltd TD/Model RBA8520-939/0711