

time flow tapware and showers

SELF CLOSING SOLUTIONS

SAVE WATER AND

IMPROVE HYGIENE

VANDAL RESISTANT



 **ENWARE**
AUSTRALIA PTY LIMITED

WWW.ENWARE.COM.AU

water is our most precious natural resource

PRECIOUS WATER NEEDS TO BE MANAGED IN AN ECONOMICAL AND AN ECOLOGICAL WAY, NOW AND FOR FUTURE GENERATIONS. ENWARE'S TIME FLOW RANGE IS PART OF OUR COMMITMENT TO PROVIDING PRACTICAL SOLUTIONS, SO WE CAN ALL MAKE A DIFFERENCE.

WATER AND ENERGY SAVINGS

Water wastage can account for a large percentage of consumption. Auto shut-off tapware helps by minimising the water wasted whilst still delivering a practical and comfortable service to the user.

- Predetermined flow rate minimises excessive water usage
- Automatic shut-off ensures the tap is turned off after use
- Enware's Time Flow tapware is WELS registered to deliver Basix, PIC and other regulatory authority compliances



HYGIENE AND COMFORT

- Easy push button activation
- Lever options on some models, ideal for accessible and child care applications
- Automatic shut-off reduces hand cross-contamination risk



ADJUSTABLE TEMPERATURE CONTROL FOR MIXERS

- All in one push button activation
- Simply turn the control knob to adjust temperature



VANDAL RESISTANT

- Shock proof mechanisms
- Chrome plated solid brass construction

TIMING OPTIONS

CHOOSE FROM THE TIMING OPTIONS TO BEST SUIT THE APPLICATION.

- 3 SECONDS*
- 7 SECONDS*
- 15 SECONDS*
- 30 SECONDS*

* Times are indicative only and may vary depending on the water supply pressure and flow conditions



WATER EFFICIENCY

Enware's Time Flow tapware is supplied standard with a WELS rated 4 star water efficiency rating. Also available in WELS 3, 5 and 6 star water efficiency ratings. Enware's showers are supplied standard with a WELS 3 Star (8lpm) water efficiency rating.



Enware Time Flow tapware is an Australian WaterMark approved product.

AS/NZS 3718 WMKA 1583
SAI Global

TIME FLOW TAPWARE


TEMPOMIX BASIN MIXER TAP - PUSH BUTTON

SINGLE CONTROL AUTOMATIC SHUT-OFF BASIN MIXER WITH TEMPERATURE ADJUSTABILITY

- Shut-off delay - 15 seconds
- Dual fixing points for anti-rotation
- Stainless steel flexible connectors

Order Code:
TFC795100

4 Star (7.7 lpm) water efficiency rating supplied as standard.
Also available in 3 (9.1 lpm), 5 (5.9 lpm) and 6 (5.6 lpm) Star ratings.

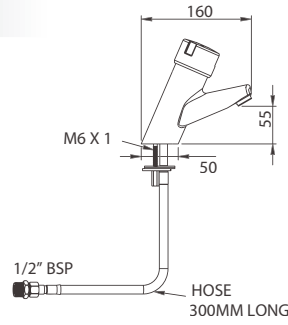


TEMPOSTOP BASIN PILLAR TAP - PUSH BUTTON

AUTOMATIC SHUT-OFF PILLAR TAP

- Flow straightener
- Shut-off delay - 7 seconds (3 or 15 seconds on request)

Order Code:
TFC745P - 7 seconds
TFC745 - 15 seconds
TFC745P3 - 3 seconds

4 Star (7.7 lpm) water efficiency rating supplied as standard.
Also available in 3 (9.1 lpm), 5 (5.9 lpm) and 6 (5.6 lpm) Star ratings.

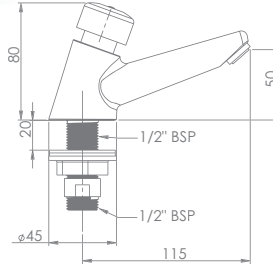


TEMPOSTOP BASIN PILLAR TAP - LEVER

AUTOMATIC SHUT-OFF LEVER OPERATED PILLAR TAP

- Flow straightener
- Shut-off delay - 7 seconds (3 or 15 seconds on request)
- Recommended for children, the elderly & disabled

Order Code:
TFC745L - 7 seconds
TFC745L15 - 15 seconds
TFC745L3 - 3 seconds

4 Star (7.7 lpm) water efficiency rating supplied as standard.
Also available in 3 (9.1 lpm), 5 (5.9 lpm) and 6 (5.6 lpm) Star ratings.

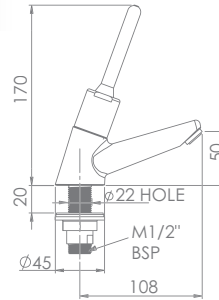


TEMPOSTOP BIB TAP - PUSH BUTTON

AUTOMATIC SHUT-OFF PUSH-BUTTON BIB TAP

- Shut-off delay - 7 seconds (3 or 15 seconds on request)
- Flow straightener

Order Code:
TFC746P - 7 seconds
TFC746 - 15 seconds
TFC746P3 - 3 seconds

4 Star (7.7 lpm) water efficiency rating supplied as standard.
Also available in 3 (9.1 lpm), 5 (5.9 lpm) and 6 (5.6 lpm) Star ratings.

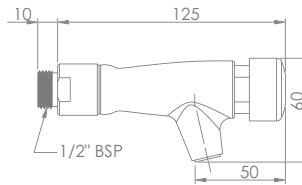


TEMPOSTOP BIB TAP - LEVER

AUTOMATIC SHUT-OFF LEVER OPERATED BIB TAP

- Shut-off delay - 7 seconds (3 or 15 seconds on request)
- Flow straightener
- Recommended for schools, the elderly & disabled

Order Code:
TFC746L10 - 7 seconds
TFC746L15 - 15 seconds
TFC746L3 - 3 seconds

4 Star (7.7 lpm) water efficiency rating supplied as standard.
Also available in 3 (9.1 lpm), 5 (5.9 lpm) and 6 (5.6 lpm) Star ratings.

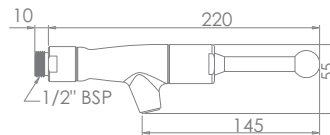


TEMPOSTOP EXTENDED BIB TAP - PUSH BUTTON

AUTOMATIC SHUT-OFF PUSH-BUTTON BIB TAP

- Shut-off delay - 7 seconds (3 or 15 seconds on request)
- Flow straightener

Order Code:
TFC746EP - 7 seconds

4 Star (7.7 lpm) water efficiency rating supplied as standard.
Also available in 3 (9.1 lpm), 5 (5.9 lpm) and 6 (5.6 lpm) Star ratings.

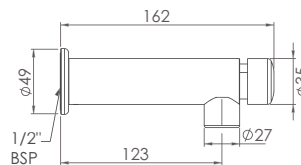

TIME FLOW RETRO-FIT TAPWARE


TIMED FLOW RETROFIT ADAPTOR - PILLAR/BIB TAP

AUTOMATIC SHUT-OFF VALVE

- Shut off delay - 7 seconds (3 or 15 seconds on request)
- Retro-fits to AS/NZS compliant pillar and bib tap bodies

Order Code:
TFC794

4 Star (7.7 lpm) water efficiency rating supplied as standard.
Also available in 3 (9.1 lpm), 5 (5.9 lpm) and 6 (5.6 lpm) Star ratings.

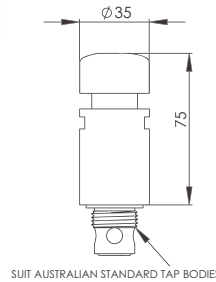



TIMED FLOW RETROFIT ADAPTOR - RECESSED

AUTOMATIC SHUT-OFF VALVE

- Shut-off delay - 15 seconds (3 or 7 seconds on request)
- Retro-fits to AS/NZS compliant recess bodies

Order Code:
TFC794R

4 Star (7.7 lpm) water efficiency rating supplied as standard.
Also available in 3 (9.1 lpm), 5 (5.9 lpm) and 6 (5.6 lpm) Star ratings.

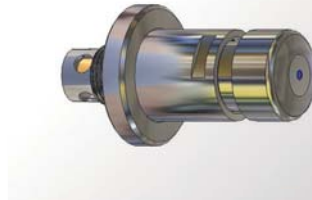


ELECTRONIC TIME FLOW OPTIONS

TOUCH ACTIVATED TIME FLOW PILLAR TAP

EASY TO USE, LIGHT TOUCH PIEZO TECHNOLOGY

- Programmable flow time 1- 60 seconds, adjustable in-situ
- Default flow time 8 seconds
- Electronic control for more accurate flow times
- Advanced on-off function – user can touch button to turn tap off before flow cycle finishes
- Vandal resistant design
- Cold or premixed warm water

Order Code:
ENM1300 – Battery Powered (6 x 1.5V AA)
ENM1301 – Mains Powered (9V)

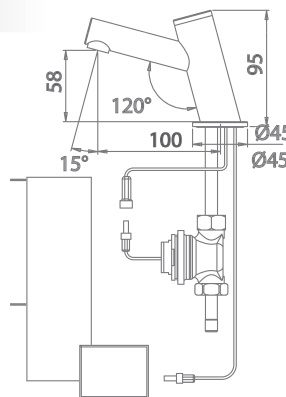


TOUCH ACTIVATED TIME FLOW WALL TAP

EASY TO USE, LIGHT TOUCH PIEZO TECHNOLOGY

- Programmable flow time
- Default flow time 15 seconds
- Electronic control for more accurate flow times
- Stainless steel wall plate
- Vandal resistant design
- Cold or premixed warm water

Order Code:
ENM5073 – Mains Powered

5 Star (5.9 lpm) water efficiency rating supplied as standard.
Also available in 3 (9.1 lpm), 4 (7.7 lpm) and 6 (5.6 lpm) Star ratings.


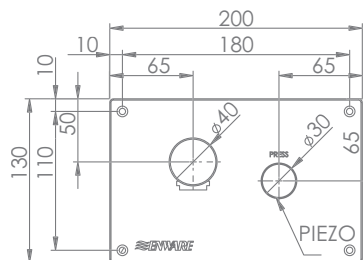


TOUCH ACTIVATED TIME FLOW SINGLE BUTTON CONTROL - SHOWER

CONTROL SHOWER TIMES IN PUBLIC SHOWERS IN SWIMMING CENTRES, SCHOOLS AND SPORTING FACILITIES

- Programmable flow time to suit your application (3 seconds - 6 minutes)
- Electronic control for more accurate flow times
- Lock-out timing option available to prevent continued use
- Stainless steel wall plate
- Vandal resistant design
- Cold or premixed warm water

Order Code:
EMD811 – Mains Powered

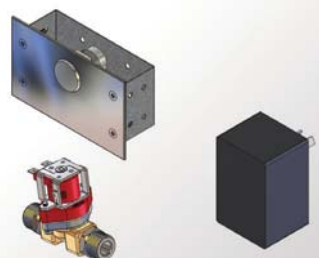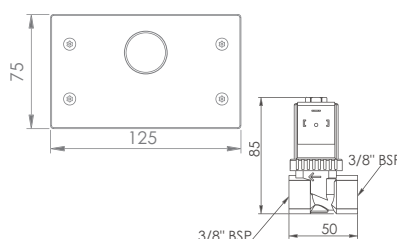

TIME FLOW SHOWER VALVES


TEMPOMIX SHOWER MIXER – RECESSED

SINGLE CONTROL AUTOMATIC SHUT-OFF SHOWER MIXER WITH TEMPERATURE ADJUSTABILITY

- Shut-off delay - 30 seconds
- M1/2" inlet/outlet
- Stainless steel, wall plate Ø195mm

Order Code: TFC790925

See below for WELS registered shower heads.




TEMPOSTOP SHOWER VALVE – RECESSED

AUTOMATIC SHUT-OFF SHOWER VALVE SINGLE TEMPERATURE

- Shut-off delay - 30 seconds
- F1/2" inlet/outlet
- Stainless steel, wall plate Ø130mm

Order Code: TFC749128

See below for WELS registered shower heads.




TEMPOSTOP SHOWER VALVE 30 – EXPOSED

AUTOMATIC SHUT-OFF SHOWER VALVE SINGLE TEMPERATURE

- Shut-off delay - 30 seconds
- M1/2" inlet/outlet

Order Code: TFC749

See below for WELS registered shower heads.




TEMPOSTOP SHOWER VALVE 15 – EXPOSED

AUTOMATIC SHUT-OFF SHOWER VALVE SINGLE TEMPERATURE

- Shut-off delay - 15 seconds
- Straight type - in line connection
- M1/2" inlet/outlet

Order Code: TFC747

See below for WELS registered shower heads.



TIME FLOW SHOWER HEADS


TONIC JET VANDAL RESISTANT SHOWER HEAD

VANDAL AND SCALE RESISTANT FIXED SHOWER HEAD

- Vandal resistant fixing with anti-rotation lug
- Inlet M1/2", removable for F1/2"
- Adjustable angle of spray (angle of spray can be preset by installer)

Order Code: TFC712000

3 Star (8 lpm) water efficiency rating supplied as standard.




ROUND VANDAL RESISTANT SHOWER HEAD

VANDAL AND SCALE RESISTANT FIXED SHOWER HEAD

- Vandal resistant fixing with anti-rotation lug
- Chrome plated heavy brass
- Adjustable angle of spray (angle of spray can be preset by installer)
- Inlet M1/2", removable for F1/2"

Order Code: TFC709000

3 Star (8 lpm) water efficiency rating supplied as standard.




VANDAL RESISTANT FIXED SHOWER HEAD

SCHOOL PATTERN SHOWER HEAD

- Vandal resistant fixing
- Conicle Design
- Inlet F1/2"

Order Code: VP310

3 Star (8 lpm) water efficiency rating supplied as standard.




VANDAL RESISTANT FIXED SHOWER HEAD

DETENTION CONICLE SHOWER HEAD

- Vandal resistant fixing with anti-rotation lug
- Anti-ligature conicle design
- Inlet F1/2"

Order Code: DET660

3 Star (8 lpm) water efficiency rating supplied as standard.



TIME FLOW SHOWER MODULES


TEMPOMIX SHOWER MODULE - ANODISED ALUMINIUM PANEL

SINGLE CONTROL AUTOMATIC SHUT-OFF SHOWER MIXER WITH TEMPERATURE ADJUSTABILITY

- High resistance to vandalism
- Temperature control by user
- Maximum temperature can be limited by the installer
- Automatic shut-off delay 30 seconds
- Solid brass shower head
- Scale resistant shower head
- Adjustable angle of spray (angle of spray can be preset by installer)
- Anodised aluminium module face panel
- Bright chrome finish on shower head and button
- Flexible hose inlets with female 1/2" connections

Order Code:
TFC790310

3 Star (8 lpm) water efficiency rating supplied as standard.

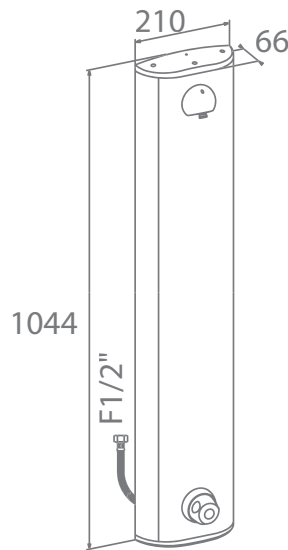


TEMPOMIX SHOWER MODULE - STAINLESS STEEL PANEL

SINGLE CONTROL AUTOMATIC SHUT-OFF SHOWER MIXER WITH TEMPERATURE ADJUSTABILITY

- High resistance to vandalism
- Temperature control by user
- Maximum temperature can be limited by the installer
- Automatic shut-off delay 30 seconds
- Solid brass shower head
- Scale resistant shower head
- Adjustable angle of spray (angle of spray can be preset by installer)
- Satin stainless steel finish on module face
- Bright chrome finish on shower head and button
- Flexible hose inlets with female 1/2" connections

Order Code:
TFC790110

3 Star (8 lpm) water efficiency rating supplied as standard.

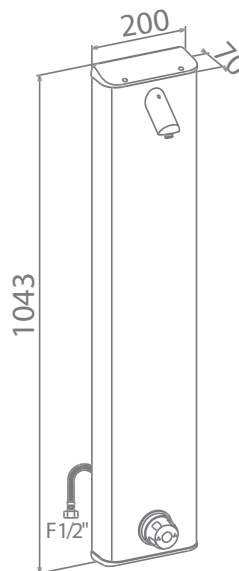


TEMPOSTOP SHOWER MODULE - STAINLESS STEEL PANEL

AUTOMATIC SHUT-OFF SHOWER VALVE SINGLE TEMPERATURE

- High resistance to vandalism
- Automatic shut-off delay 30 seconds
- Solid brass shower head
- Scale resistant shower head
- Adjustable angle of spray (angle of spray can be preset by installer)
- Satin stainless steel finish on module face
- Bright chrome finish on shower head and button
- Flexible hose inlets with female 1/2" connections

Order Code:
TFC749100

3 Star (8 lpm) water efficiency rating supplied as standard.

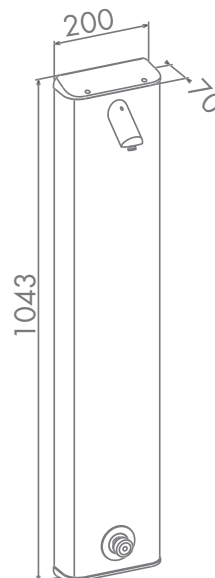

BEACH SHOWERS

Enware's stainless steel column showers are ideal for outdoor, beach and swimming pool applications.

The durable, vandal resistant design combines with water efficient time flow technology for automatic shut off. Available in a variety of configurations for single or multiple showers with optional foot rinsing tapware.



STAINLESS STEEL COLUMN SHOWERS

15 SECONDS SUPPLIED STANDARD, 3 OR 7 SECONDS AVAILABLE ON REQUEST

Order Code:

ECS400 - Quad Shower

ECS401 - Quad Shower with Single Foot Wash

ECS300 - Triple Shower

ECS301 - Triple Shower with Single Foot Wash

ECS200 - Double Shower (180° opposite)

ECS201 - Double Shower (180° opposite) with Single Foot Wash


ECS200A - Double Shower (90° adjacent)

ECS201A - Double Shower (90° adjacent) with Single Foot Wash

ECS100 - Single Shower

ECS101 - Single Shower with Single Foot Wash

For customised options please contact your Enware representative.


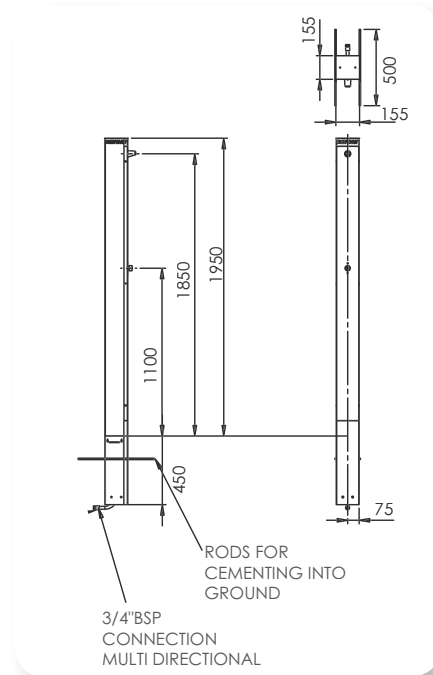


COBRA FREE STANDING SHOWER

- Free standing shower column
- Manufactured from stainless steel tube
- Curved design with integral plumbing and time flow self-closing tapware

Order Code:

ENF-AQRM670

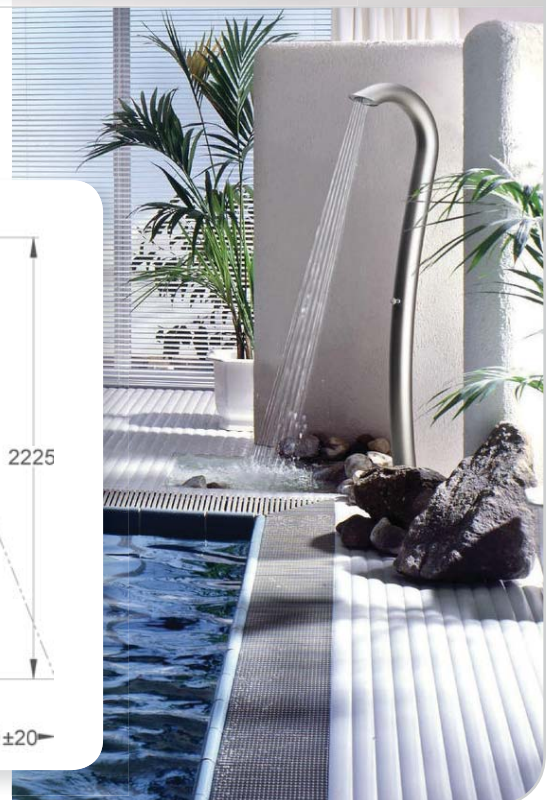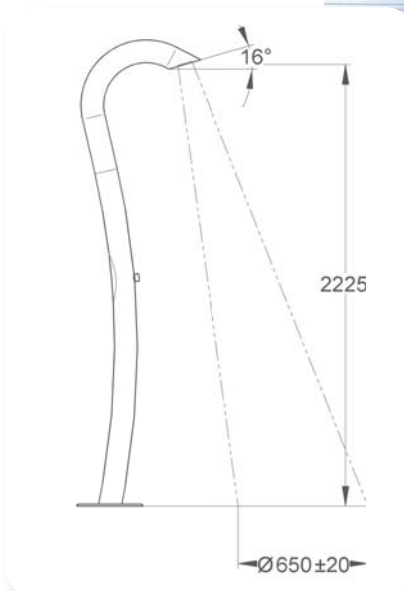

TECHNICAL INFORMATION

TIME FLOW TAPWARE

| | |
|--|----------------|
| Finish: | Bright chrome |
| Recommended Working Pressure: | 350kPa |
| Maximum Working Pressure [AS/NZS 3500]*: | 500kPa |
| Minimum-Maximum Rated Static Pressure: | 50 - 500kPa* |
| Water Temperature: | Maximum 50° C* |

*Enware products are to be installed in accordance with AS/NZS3500.

Heated Water Supply AS/NZS 3500.4: For all sanitary fixtures used primarily for personal hygiene purposes are to deliver heated water not exceeding:

a) **45°C** for early childhood centres, primary and secondary schools and nursing homes or similar

b) **50°C** in all other buildings.

ALSO AVAILABLE FROM ENWARE

SPRING ACTION TAPWARE

Heavy-duty Spring Action tapware and drinking fountains for public places.



VANDAL RESISTANT TAPWARE

Robust, easy to clean, vandal resistance for commercial, institutional and public use.



ELECTRONIC TAPWARE

Electronic tapware with hygienic, non-touch activation for cold or mixed temperature water.



AQUABLEND TMV RANGE

Thermostatic Mixing Valves (TMVs). Warm water solutions for the safe delivery of mixed warm water.



DETENTION TAPWARE

For high risk applications such as gaols, detention centres and public facilities.



CAREKIT - ACCESSIBLE TOILET SOLUTION

Convenience of bathroom elements in one easy kit for assisting with meeting DDA and AS1428 requirements for wheelchair accessible toilets.



ENWARE IN BRIEF

Enware is a world-leading Australian designer and manufacturer of quality specialist commercial tapware solutions and safety systems.

Since inception in 1937, Enware Australia has grown significantly. Today, Enware has offices located around the country and is represented in major regions throughout the world including Asia, the Pacific, the Middle East and Europe. As a global leader of specialist tapware and safety systems, Enware offers a more extensive range than any other company on the market.

SOPHISTICATED MANUFACTURING DELIVERS PREMIUM QUALITY

To develop our innovative specialist products we use extensive market research, our technical know-how and experience.

Our precision manufacturing plants ensure the quality and reliability for which Enware products are renown, with our continued commitment to meeting Australian and international standards.

We strive to exceed your expectations by providing durable, dependable products that offer water efficient solutions and are designed and manufactured in an environmentally caring manner.

SPECIALIST
PLUMBING SOLUTIONS

ADAPTABLE WORK
& LIVING SOLUTIONS

ENVIRONMENTAL, HEALTH
& SAFETY SOLUTIONS

STAINLESS STEEL
WASHROOM SYSTEMS



ADDRESS: 9 Endeavour Road, Caringbah NSW 2229 Australia
 POSTAL ADDRESS: P.O. Box 2545, Taren Point NSW 2229 Australia
 PHONE: 61 2 9525 9511 FAX: 61 2 9525 9536
 1300 369 273 (AUS) WWW.ENWARE.COM.AU INFO@ENWARE.COM.AU

