



*“Don’t make something  
unless it is both  
necessary and useful;  
But if it is both  
necessary and useful,  
don’t hesitate to make  
it beautiful.”*

*Shaker Rule of Thumb*




### HYDROSLIDE

- **PRODUCT OF THE YEAR** as voted by readers of USGLASS magazine for 2007.
- Australian designed and owned.
- Versatile design; wall-to-wall, corner or three sided configurations.
- Fixed glass panels can be fitted on either side or above the sliding door.
- Safe and secure door fastening. No derailment problems.
- 8 or 10mm thick grade A toughened safety glass recommended.
- Standard fitting finishes chrome or satin chrome.
- Standard track finishes polished silver or natural anodised.
- Patent applied for all rights reserved.  
ABN 74 080 829689.

For further information contact

HydroScreen Pty Ltd.  
ABN 74 080 829 689  
Unit 4, 121A Old Pittwater Rd. Brookvale N.S.W. Australia 2100  
Phone +61 2 9939 5188 Fax +61 2 9939 5177  
Email [info@hydroscreen.com.au](mailto:info@hydroscreen.com.au)  
[www.hydroscreen.com.au](http://www.hydroscreen.com.au)

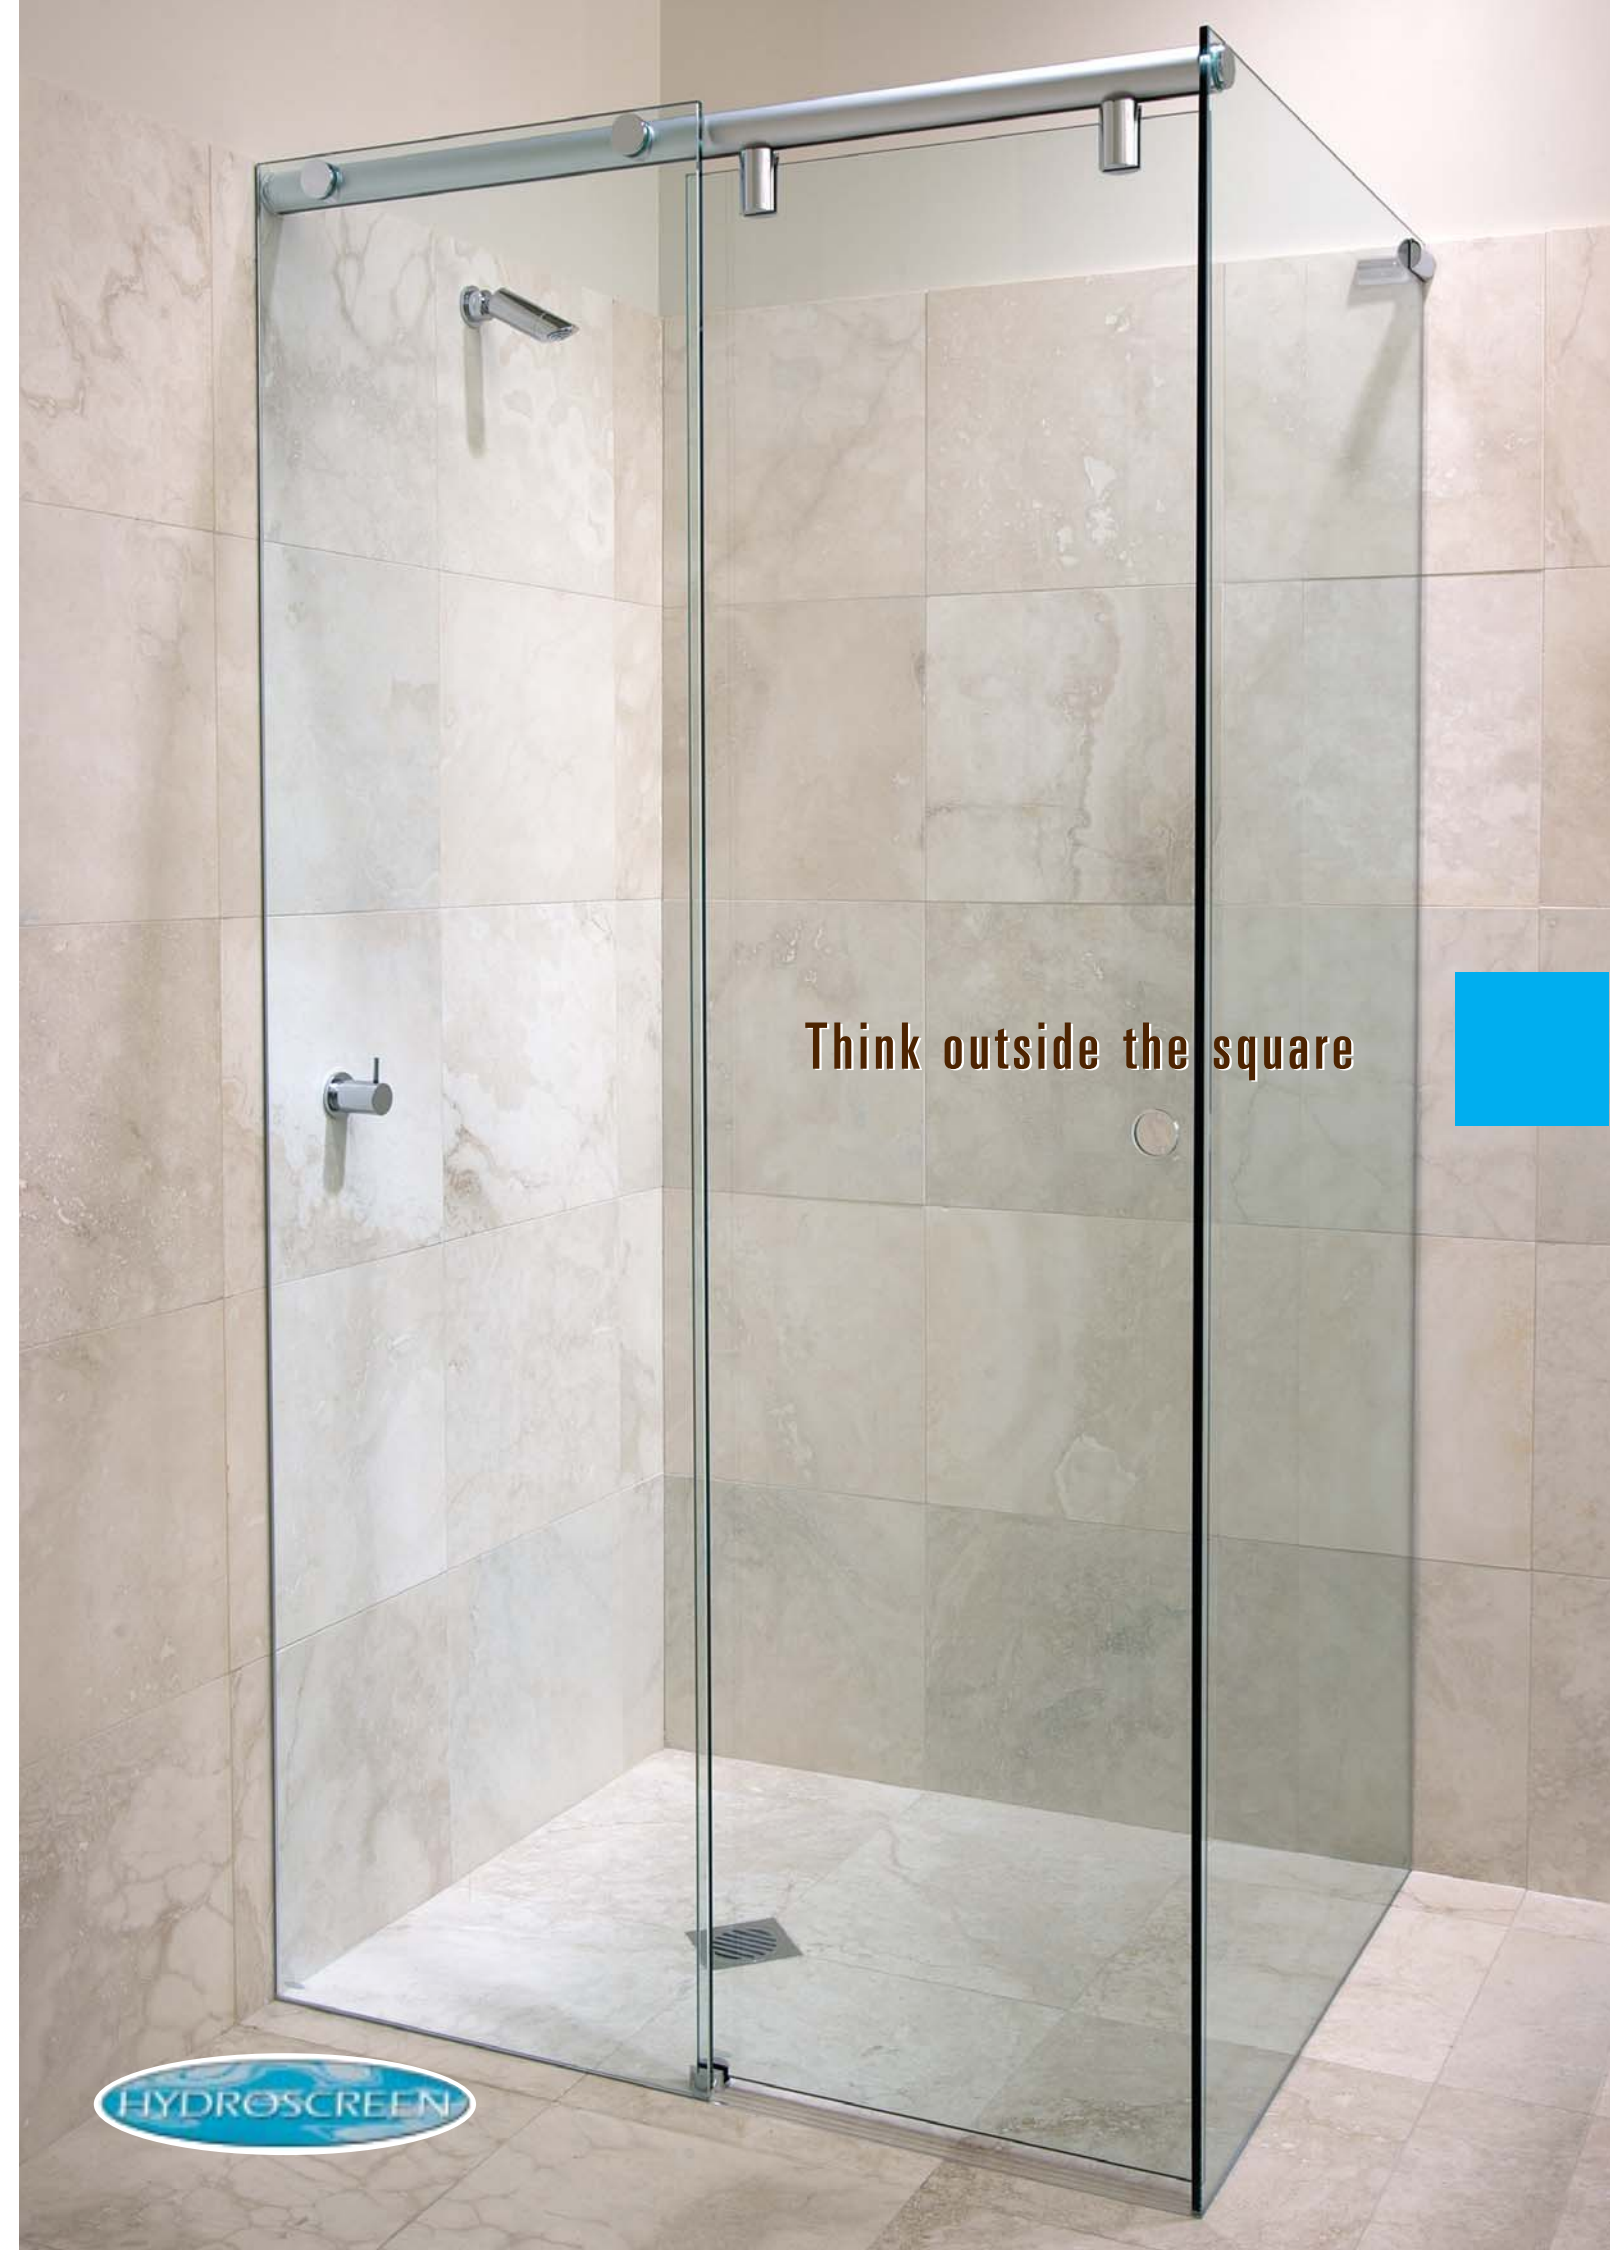

Think outside the square



# contemporary shower enclosures



Think outside the square



## HYDROPIVOT

- Versatile design provides for door fixing to adjacent walls or panels at 90, 180 or 135 degrees.
- Doors can be mounted on flat tiled floors or inside a stepped floor tile design of 5 to 20mm.
- Floor mounted door provides safe and secure support for doors of up to 50kg.
- Reliable gravity forced self-closing doors from 15 degrees.
- 10mm toughened safety glass.
- All fixing screws are concealed for an aesthetic easy clean finish.
- Doors can be pivoted from the ceiling with a gap over the door of 11mm, 38mm or 50mm to provide clearance for ceiling projections, ventilation or aesthetic design options.
- Standard finishes are chrome or satin chrome.
- Ceiling brackets for fixed glass panels are available to match ceiling pivots with complementary options of 11mm, 38mm or 50mm clearance at the ceiling.
- Wall brackets are re-enforced and cantilevered to support fixed side panels.
- Doors open inward and outward.

