

Quantum[®]



TREND[®]
WINDOWS  & DOORS

Architectural Series

contents

Trend® Windows & Doors	2
Quantum XP® Windows	
Sashless Double Hung	3
Awning	5
Casement	7
Sliding	9
Bifold	11
Louvres	13
Quantum XP® Doors	
Sliding	15
Alfresco Stacker	17
Alfresco Bifold	19
Front Entry	21
Thermashield®	23
SoundMizer® Acoustics	24
Product Installation	25
Guarantee	25
Care & Maintenance	26

Trend® National Customer Assistance Centre

(between 8:30am - 4:30pm EST, M-F)

13 72 74

www.trendwindows.com.au

email: info@trendwindows.com.au

NOTE: Hardware displayed in photography may vary from state to state due to supplier or availability. Trend® Windows & Doors Pty Ltd reserve the right to make changes to product(s) without notice.

trend® windows & doors

Create a welcoming ambience and sense of style in your home with Trend® Windows & Doors.

Choose from the largest, most comprehensive range in Australia with more design and performance features than ever before.

Trend® offers experience, quality and service that you can rely on. Trend® understands that choosing the right windows and doors for your home is critical, so here are some pointers to assist you.

Quality & Durability

Windows and doors should be strong and well made, providing you with many years of effortless performance. All Trend® windows and doors carry the Australian Window Performance label.

Trend® will inspire you with the options available and provide you with the expertise to create a perfect environment in your home.

Design & Style

Colour, style, size and shape of windows and doors enhance the charm and character of your home, both inside and out. You can create exactly the look and feel you want for your home, with just the right amount of natural light.

Energy Efficiency

Enhancing the comfort of your home depends significantly on the amount of ventilation and insulation provided by your windows and doors.

A cool breeze in summer is refreshing and staying warm in winter is essential. With Australia's diverse climate it is important to consider the best design options for your location and individual needs.

Trend® can offer advice on how to save money on energy costs by choosing the appropriate sash style, glass type and style for your particular climatic conditions.

Safety & Security

Your family needs to feel safe and secure, so it is essential to use locks and frames that will deter unwanted entry and select the right type of glass.

Trend® can assist you with these decisions as Trend® products adhere to the highest standards of safety and security.

Your Individual Needs

You may have specific needs, such as arches, glazing bars or bay windows or a specific glass or hardware type.

Trend® provides you with complete design flexibility.

Bushfire Protection

Xtreme® bushfire protection that has been tested by CSIRO to BAL-40, which is fully compliant to AS1530.8.1 within AS3959-2009 is available.



Members of the Australian Window Association

sashless double hung



Quantum XP® sashless double hung windows offer timeless elegance equally in contemporary and more traditional homes.

The flexible design lets you adjust airflow to the season and your frame of mind. Counter balanced sashes allow for maximum ventilation. Interlocking top and bottom sashes also provide added weatherability.

All with the benefits of aluminium, low maintenance, durability and a broad range of powdercoat finishes.

- 1 Energy Efficiency Options**
To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.
- 2 Acoustic Options**
SoundMizer® acoustic solutions are available for sashless double hung windows.
- 3 Key Locks**
All sashless double hung windows are available with key lock as standard that can be keyed to match other windows. Vent locks are also available.
- 4 Frame**
Frame section is 100mm for a contemporary commercial appearance.
- 5 Weather Sealing**
All sashes are fitted with weatherpile seals to keep out dust and water.
- 6 Complementary Accessories**
 - 180° non-load bearing couplers. Two types are available for added mullion strength when required.
 - 135° and 90° non-load bearing corner couplers to suit bay and kitchen windows.
 - Adjustable aluminium storm mould.
 - Aluminium 180° and 90° mullion covers to hide load bearing posts.
- 7 Protective Wrapping**
Protective wrapping for delivery to site is standard for all Quantum XP® products.
- 8 Options**
 - Easy-to-fit flyscreens.
 - Wide range of powdercoat finishes are available.
 - Xtreme® BAL-40 bushfire protection is available.

clean & minimalistic design





awning window



When you're looking for quality and style make sure you're looking out at the world through Quantum XP® awning windows.

Maximising space and light with contemporary clean designs, awning windows are great for creating a sense of space. Perfect for showing off the view.

On a practical level, high quality winders stop windows slamming, while the hood protects against the elements.

- 1 Energy Efficiency Options
To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.
- 2 Acoustic Options
SoundMizer® acoustic solutions are available for awning windows.
- 3 Key Lock Scissor Winder
Awning window winder mechanism is designed specifically for high performance, security and reliability. Secura hardware is available in stainless steel or powdercoat finishes. 100mm restrictor openers are available for safety options. Key lock is standard for added security.
- 4 Frames
Quantum XP® awning window framing offers a commercial look. This robust 102mm frame allows for large fixed lite applications for greater viewing area.
- 5 Continuous Hinge Hood
The sash is protected from the weather by a continuous hinge hood.
- 6 Glazing
Awning window is available in 4mm thick glass to 24mm double glazing for energy efficiency applications.
- 7 Window Placement
Care should be taken with locating opening awning windows in pedestrian traffic areas.
- 8 Protective Wrapping
Protective wrapping for delivery to site is standard for all Quantum XP® products.
- 9 Options
 - Easy-to-fit flyscreens that can be fitted and removed from the inside.
 - Wide range of powdercoat finishes are available.
 - Xtreme® BAL-40 bushfire protection is available.

inspired vision





casement window




If you're planning to make a bold statement, Quantum XP® casement windows may be precisely what you're looking for. Their classic design brings character to any home.

Strong angular lines created by the premium 62mm sash gives a solid feel reminiscent of timber with all the strength and practicality of aluminium.

RENOWNED for
durability,
versatility &
affordability

- 1 Energy Efficiency Options**
To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.
- 2 Acoustic Options**
SoundMizer® acoustic solutions are available for casement windows.
- 3 Key Lock Scissor Winder**
Casement window winder mechanism is designed specifically for high performance, security and reliability. Secura hardware is available in stainless steel or powdercoat finishes. 100mm restrictor openers are available for safety options. Key lock is standard for added security.
- 4 Side Sash Latch**
Handle is operated by 180° rotation from open to close position and is concealed within the window frame. Operator pulls in sash for a tighter seal against the weather and improved security.
- 5 Opening**
Quantum XP® Casement Window allows 90° opening for wider viewing area and excellent ventilation control. The 90° opening makes it convenient for cleaning both sides of the sash.
- 6 Frames**
Quantum XP® casement window framing offers a commercial look. This robust frame allows for large fixed lite applications for greater viewing area.
- 7 Glazing**
Casement window is available in 4mm thick glass to 24mm double glazing for energy efficiency applications.
- 8 Window Placement**
Care should be taken with locating opening casement windows in pedestrian traffic areas.
- 9 Protective Wrapping**
Protective wrapping for delivery to site is standard for all Quantum XP® products.
- 10 Options**
 - Easy-to-fit flyscreens that can be fitted and removed from the inside.
 - Wide range of powdercoat finishes are available.
 - Xtreme® BAL-40 bushfire protection is available.



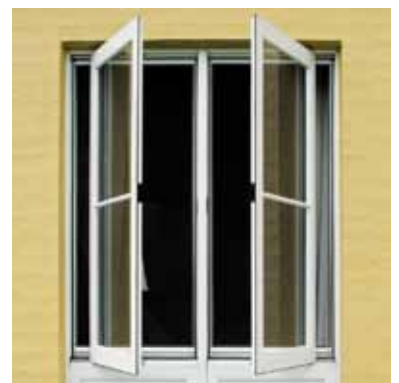

sliding window



With its patented Van Door sealing system, the Quantum XP® sliding window is the number one choice when quality matters. Giving your home a premium look, with clean uncluttered lines that perfectly frame your view.

Quantum XP® sliding windows guarantee a first class lifestyle that makes the most of warm summer evenings or winter sun.

Extra durable double rollers ensure the aluminium frames always glide smooth and effortlessly.

- 1 Energy Efficiency Options**
To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.
- 2 Acoustic Options**
SoundMizer® acoustic solutions are available for sliding windows.
- 3 Security**
Sliding window is available with an optional concealed integral vent lock, which allows the window to be key locked while partially open for ventilation. Optional key lock is also available.
- 4 Fire Safety Egress**
Optional fire egress security screen pin system is available, which allows for quick removal of barrier screens in the event of an emergency.
- 5 Frames**
Quantum XP® sliding window frames are 100mm with window sash 55mm wide.
- 6 Window Rollers**
Quantum XP® sliding window uses a heavy duty dual wheel system for smooth operation.
- 7 Glazing**
Sliding window is available in 4mm thick glass to 24mm double glazing for energy efficiency applications.
- 8 Protective Wrapping**
Protective wrapping for delivery to site is standard for all Quantum XP® products.
- 9 Options**
 - Easy-to-fit flyscreens that can be fitted and removed from the inside.
 - Available in colonial, federation and ovolo styles.
 - Wide range of powdercoat finishes are available.
 - Xtreme® BAL-40 bushfire protection is available.

vision first always





bifold window



Quantum XP® bifold windows let you bring the outside into any room.

Light and space flow inside the room as your windows fold away.

Always a favourite when space is a premium. They can be custom designed to your taste and style.

Stainless steel hardware ensures lasting good looks and durability.

1 Energy Efficiency Options

To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.

2 Acoustic Options

SoundMizer® acoustic solutions are available for bifold windows.

3 Frames

The weight of the bifold windows must be considered in the structural beam calculation of the overall structure.

The bifold window and frame are not structural elements and the head of the frame must be attached to the structural beam.

Minimum frame height is 1000mm.
Maximum frame height is 1600mm.
Maximum frame width is 6062mm.
Maximum window leaf size is 870mm.
Maximum weight in one direction is 180kg.

4 Window Hardware

Stainless steel hardware is provided as standard. Window hardware, hinges and drop bolts are available in two finishes- stainless steel and black powdercoat.

5 Protective Wrapping

Protective wrapping for delivery to site is standard for all Quantum XP® products.

6 Options

- Wide range of powdercoat finishes are available.
- Bushfire protection up to BAL-29.

NOTE: Available open out only.

extend your
living
space



Louvres



Louvres are the latest in window style. An architectural renaissance born from the recognition that louvres not only look cool they are cool - offering superior flow through ventilation. In this climate of change Trend® has introduced a new generation louvre design featuring improved sealing and durability.

Quantum XP® louvres give a super tight weather-proof seal setting new standards for this contemporary classic. Blades come in glass, timber or aluminium and can be installed as a single frame or in combination with doors or windows.

- 1 Energy Efficiency Options
To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.
- 2 Acoustic Options
SoundMizer® acoustic solutions are available for louvres.
- 3 Security
Key locks for louvres can be provided upon request. Optional security bars, which fit standard blade widths, are also available for additional security.
- 4 Handles
Ergonomic curved handles are supplied as standard, which are available in 25 colours. Optional "O-Ring" handles are available for high, out-of-reach applications. Low profile handles, for door insertions, are optional, as are handle locking bars for easier opening. Handles can be placed high or low and on the left or right.
- 5 Blades
Louvre blades are available in 152mm or 102mm height with 6mm toughened glass. Use of laminated glass is not recommended.
- 6 Frames
Louvres provide excellent ventilation. The frame is 130mm wide. The galleries can be used to divide internal spaces, be used for privacy screens or to maximise ventilation.
- 7 Options
 - Easy-to-fit flyscreens that can be fitted and removed from the outside.
 - Installed as single frame or combined with hinged doors, fixed or sliding windows.
 - Cedar, aluminium or toughened glass blades are available.
 - High performance, extended warranty aluminium blades (including timber powdercoat finish).
 - Frosted, etched or tinted toughened glass.

**lighten,
cool &
ventilate**



sliding door



You'll appreciate the difference Quantum XP® sliding doors bring to your home.

Quality construction and materials create one of the strongest sliding doors available.

Gliding smooth and effortlessly, blending outdoors seamlessly with indoors - these sliding walls of glass add a fresh dimension to any type of home from contemporary to more traditional designs.

Features include energy saving options, matching screen or barrier doors and a wide choice of colours.

superior
quality,
strength &
PRACTICALITY

- 1 Energy Efficiency Options
To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.
- 2 Acoustic Options
SoundMizer® acoustic solutions are available for sliding doors.
- 3 Locks
Sliding doors are fitted with double cylinder deadlock as standard.
- 4 Protected Rolling Track
An extruded aluminium splayed threshold protects both glass door and screen door rolling tracks.
- 5 Wheelchair Access
Aluminium threshold features an Easyrider™ sill, which is ideal for wheelchair access.
- 6 Heavy Duty Rollers
Sliding doors are fitted with heavy duty, double bogey, roller systems for smooth operation.
- 7 Security
Sliding door has a double parrot beak with a 2-point locking system. Striker plate is mounted with full fixing to jamb for added security.
- 8 Frames
Frame is 101.6mm wide and door is 50mm wide.
Maximum door height is 2700mm.
Maximum door panel width is 1500mm.
- 9 Interlockers
Five types of interlockers are available.
- 10 Screen Door
An external extruded aluminium sliding screen door can be fitted with spring loaded acetel wheels. Ensuring the screen door stays on the track and operates smoothly.
- 11 Safety Glazing
Toughened Safety A Grade glass with a visual motif at mid-point provided. Laminated glass is used in all non-standard door sizes. 18mm double glazing is available.
- 12 Complimentary Accessories
 - 180° non-load bearing couplers.
 - 135° non-load bearing corner couplers.
 - Adjustable aluminium storm mould.
 - Extruded aluminium 180° mullion covers to hide load bearing posts.
- 13 Options
 - Wide range of powdercoat finishes are available.
 - Xtreme® BAL-40 bushfire protection is available.





alfresco stacker door



Quantum XP® alfresco stacker doors offer top quality alfresco living.

Superior craftsmanship, materials and fittings ensure lasting good looks.

These glide-away glass walls provide broad expanses of glass that let light in while creating a stylish outdoor room for leisure or entertaining.

alfresco indoor & outdoor solutions

- 1 Energy Efficiency Options
To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.
- 2 Acoustic Options
SoundMizer® acoustic solutions are available for alfresco stacker doors.
- 3 Locks
Alfresco stacker doors are fitted with double cylinder deadlock as standard.
- 4 Protected Rolling Track
An extruded aluminium splayed threshold protects both glass door and screen door rolling tracks.
- 5 Wheelchair Access
Aluminium threshold features the Easyrider™ sill, which is ideal for wheelchair access.
- 6 Heavy Duty Rollers
Alfresco Stacker doors are fitted with heavy duty, double bogey, roller systems for smooth operation.
- 7 Frames
Frame is 101.6mm wide and sash is 50mm wide.
Maximum door height is 2700mm.
Maximum door width is 4473mm (up to 3 panel).
Maximum door width is 6390mm (up to 6 panel).
- 8 Security
Alfresco stacker door has a double parrot beak with a 2-point locking system. Striker plate is mounted with full fixing to jamb for added security.
- 9 Interlockers
Five types of interlockers are available.
- 10 Screen Door
An external extruded aluminium sliding screen door can be fitted with spring loaded acetal wheels. Ensuring the screen door stays on the track and operates smoothly.
- 11 Safety Glazing
Toughened Safety A Grade glass with a visual motif at mid-point provided. Laminated glass is used in all non-standard door sizes. 18mm double glazing is available.
- 12 Complimentary Accessories
 - 180° non-load bearing couplers.
 - 135° non-load bearing corner couplers.
 - Adjustable aluminium storm mould.
 - Extruded aluminium 180° mullion covers to hide load bearing posts.
- 13 Options
 - Wide range of powdercoat finishes are available.
 - Xtreme® BAL-40 bushfire protection is available.





alfresco bifold door



Quantum XP® bifold doors give you extra breathing space, folding the outside in and capturing more of the natural light. When compared to traditional doors, they give you the flexibility to open up some or all of a room while making more of your available space.

We can also custom build bifold doors to your design, giving you even greater scope to add character and style to your home.

Quality stainless steel hardware combined with durable maintenance free aluminium, guarantees years of trouble free use. And you can choose from a range of powder coated or timber grain finishes.

- 1 Energy Efficiency Options**
To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.
- 2 Acoustic Options**
SoundMizer® acoustic solutions are available for bifold doors.
- 3 Hardware**
Stainless steel hardware is provided as standard. Door hardware, hinges and drop bolts are available in two finishes- stainless steel and black powdercoat.
- 4 Frames**
The weight of the bifold doors must be considered in the structural beam calculation of the overall structure.
- 5 Safety Glazing**
Toughened Safety A Grade glass with a visual motif at mid-point provided. Laminated glass is used in all non-standard door sizes. Double glazing is available.
- 6 Protective Wrapping**
Protective wrapping for delivery to site is standard for all Quantum XP® products.
- 7 Options**
 - Wide range of powdercoat finishes are available.
 - Xtreme® BAL-40 bushfire protection is available.

NOTE: Available open out only.

The bifold door and frame are not structural elements and the head of the frame must be attached to the structural beam.

Maximum frame height is 2700mm.
Maximum frame width is 6062mm.
Maximum door leaf size is 870mm.
Maximum weight in one direction is 180kg.

ultimate alfresco series





f r o n t e n t r y



They say you never get a second chance to make a first impression.

Quantum XP® entry frames are all about creating a lasting first impression. Elegantly grand or stylishly minimalist, contemporary or traditional.

Whatever your preference, we'll help you create something special. Something that's more than just a front entry.

make a
lasting first
impression



thermashield system



Windows and doors that utilise the advanced properties of Thermashield® energy efficient systems, offer a much more precise way to shield your home from weather extremes.

The Thermashield® system makes it easy to evaluate the level of protection required for specific windows and doors in your home.

To get the best energy savings, and the most comfort, different windows and doors are required for different climates. In cold climate areas, Thermashield® can prevent heat loss, air leakage, and create warmer window surfaces, while significantly reducing solar heat gain in hot climate areas.

High-performance Thermashield® systems make buildings more energy efficient, more comfortable and reduce peak heating and cooling loads.



high-performance
energy
efficient
systems

soundmizer acoustics

SoundMizer®

With the constant need to combat extremes of noise, windows and doors can often be the weakest link in the isolation of noise from outside a home.

SoundMizer® products are high-performance, acoustic windows and doors designed to minimise troublesome noise.

All acoustic products are tested by industry laboratories and adhere to current Australian standards. Solutions are available for high-traffic areas including freeways, railway environments and airport surroundings.

Acoustic solutions up to Rw 46 can be achieved with single and secondary glazing elements for any noisy environment.



**ACOUSTIC
SOLUTIONS**
designed to
minimise
troublesome
noise



trend® guarantee

- (a) The following statement only applies to a consumer sale of goods or services as defined in the Australian Consumer Law:
- (i) Our Goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the Goods repaired or replaced if the Goods fail to be of acceptable quality and the failure does not amount to a major failure.
- (b) Trend guarantees the Goods supplied will be free against defects arising from faulty workmanship or materials for a period of seven (7) years (one (1) year for Goods considered by Trend® as moving parts) from date of delivery and guarantees that services will be rendered with due care and skill. The guarantees are subject to the following conditions being complied with by the Customer:
- (i) The Goods are installed (where Goods are not installed by Trend® and maintained in accordance with the manufacturer's recommendations (refer to Trend®'s Installation Guide and Care and Maintenance Guide, available at www.trendwindows.com.au or from Trend®'s Sales offices) and has not been subject to misuse, abuse or neglect;
 - (ii) Timber Goods are sealed (within one (1) month of delivery) with two coats of paint, varnish or sealer to both faces and edges including top and bottom. Exterior quality finishes in light reflective colours (NOT dark colours) must be applied to all Goods exposed to direct sunlight or the elements;
 - (iii) All solid construction timber doors are hung with three (3) 100mm hinges;
 - (iv) A warp in a door will not be considered a defect unless it exceeds 4mm for doors up to 2,150mm high, 6mm for door heights between 2,150mm and 2,400mm and 7mm for door heights above 2,400mm;
 - (v) Aluminium product surfaces that have been treated with a powdercoat finish provide a much higher resistance to scratching or scuffing and protect against normal weather conditions. However Trend® does not warrant against fading or colour change due to normal weather conditions that will cause any coloured surface to fade or darken gradually.
- (c) Notwithstanding clause 9(a), the liability of Trend® in respect of a breach of a consumer guarantee or any warranty made under these Terms and Conditions for any Goods not of a kind ordinarily acquired for personal, domestic or household use is limited, to the extent permitted by law and at the option of Trend® to:
- (i) in the case of supply of Goods;
 - (A) replacing the Goods or the supply of equivalent Goods;
 - (B) the repair of the Goods;
 - (C) the payment of the cost of replacing the Goods or of acquiring equivalent Goods; or
 - (D) the payment of the cost of having the Goods repaired.
 - (ii) in the case of supply of Services;
 - (A) the supplying of the Services again; or
 - (B) the payment of the cost of having the Services supplied again.
- (d) To the extent permitted by law, all other warranties whether implied or otherwise, not set out in these Terms and Conditions are excluded and Trend® is not liable in contract, tort (including, without limitation, negligence or breach of statutory duty) or otherwise to compensate the Customer for:
- (i) any increased costs or expenses;
 - (ii) any loss of profit, revenue, business, contracts or anticipated savings;
 - (iii) any loss or expense resulting from a claim by a third party; or
 - (iv) any special, indirect or consequential loss or damage of any nature whatsoever caused by Trend®'s failure to complete or delay in completing the order to deliver the Goods.
- (e) To claim the warranty provided under this clause, the Customer must, within 7 days of identifying the defect in the Goods, provide written notice of the defect to the supplier from whom the Goods were purchased or to the nearest Trend® location listed on the Trend® website.
- (f) Where Trend® determines that the Customer is entitled to the warranty under this clause and the Goods have not been affixed to property to the extent that Trend® cannot easily remove the Goods from the property, Trend® agrees to bear the cost of claiming the warranty.
- (g) The benefits provided to the Customer by the warranty are in addition to other rights and remedies available to the Customer under the law.

installation instructions

1. Fit flashing to window surround as required.
 2. Frame must be packed plumb, square and not twisted between the opening. Ensure the sill is fully supported, failure to do so may result in sill roll on windows.
 3. Secure aluminium windows by nailing through reveal. Timber windows should be secured by back nailing through stud, not face of frame to stud. Alternatively, on cavity brick construction use galvanised building lugs located at 450mm maximum centres.
 4. Keep sash closed whilst installing frames.
 5. Sill bricks should be at least 15mm clear of window frame to allow for settlement.
 6. Do not stand on the windows, or use them as a support for scaffolding, or slide material through the frame.
 7. Do not permit weight of eaves or arch bars to bear on aluminium or timber frames.
 8. Remove cement mortar dropping from windows immediately, taking care to avoid scratching glass and frames, as permanent damage can result.
 9. Timber windows should have a first coat of an appropriate paint, oil or stain applied within thirty (30) days of delivery. Do not paint timber in dark colours. Prior to sealing, avoid placing timber near gum trees, sawdust and metal filings, as staining may occur.
- No guarantee will be given if timber or aluminium painted surfaces come into contact with acid when cleaning brickwork.

care & maintenance



On site, windows and doors should be stored in a clean dry area free from cement, lime, paint, acid etc.

During installation they must be protected from building fall-out such as wet plaster, mortar, paint and welding splatter. Remove wet plaster, cement, mortar and other droppings immediately, using ample clean water and a sponge or rag, to avoid permanent staining or scratching of finished surfaces.

If removal is delayed and scraping becomes necessary the surface finish may suffer. Door tracks and window sills should be protected from planks, scaffolding and barrows, and kept clean of grit and dirt.

Acid used for cleaning brickwork must be prevented from dripping onto aluminium or timber surfaces. Should this fail the acid must be immediately washed off with ample clean water.

If stripable coatings or pressure sensitive tapes are used to protect exposed surfaces, care must be taken not to damage the finish during their removal. Prolonged exposure to sunlight can make them increasingly difficult to remove.





maintenance conditions

1. All powdercoated surfaces should be cleaned using a soft cloth or sponge with a solution of warm water.

Where the atmosphere is deemed to be non-hazardous eg. rural, the period between cleaning frequency can be extended up to twelve (12) months.

In industrial environments or environments with atmospheric pollution the normal frequency of cleaning should be at not more than three (3) monthly intervals. However, where there is high atmospheric pollution, such as a marine/coastal environment, cleaning should be conducted at monthly intervals.

2. Remove cement mortar dropping from windows immediately, taking care to avoid scratching glass and frames, as permanent damage can result. Trend® Windows & Doors will not be liable for any damage that may occur if the timber or aluminium painted surfaces come into contact with acid when cleaning brickwork.
3. Timber products **MUST BE** sealed (within one (1) month of delivery) with two coats of paint, varnish or sealer to both faces and edges including top and bottom. Exterior quality finishes in light reflective colours (not DARK colours) must be applied to all products exposed to direct sunlight or the elements.



contact

SYDNEY

44-52 Mandoon Road,
Girraween, NSW 2145
Tel: (02) 9840 2000
Fax: (02) 9840 2100

3/384 Eastern Valley Way,
Chatswood, NSW 2067
Tel: (02) 9882 1155
Fax: (02) 9882 1566

WOLLONGONG

Tel: (02) 4256 1966
Fax: (02) 4256 3863

NOWRA

Unit 1A, 175 Princes Highway,
South Nowra, NSW 2541
Tel: (02) 4423 1500
Fax: (02) 4423 5100

NEWCASTLE

56-60 Munibung Road,
Cardiff, NSW 2285
Tel: (02) 4956 7139
Fax: (02) 4956 9146

DUBBO

1/55 Douglas Mawson Drive,
Dubbo, NSW 2830
Tel: (02) 6884 4055
Fax: (02) 6884 4057

OURIMBAH

5 Catamaran Road,
Ourimbah, NSW 2258
Tel: (02) 4389 1402
Fax: (02) 4389 8460

PORT MACQUARIE

5 Merrigal Road,
Port Macquarie, NSW 2444
Tel: (02) 6581 5100
Fax: (02) 6581 4056

TAMWORTH

7-11 Hume Street,
Tamworth, NSW 2340
Tel: (02) 6765 4066
Fax: (02) 6765 2584

ACT

74 Sheppard Street,
Hume, ACT 2620
Tel: (02) 6260 1266
Fax: (02) 6260 1381

TASMANIA

GP Glass
26 Loone Lane,
Spreyton, TAS 7310
Tel: (03) 6427 3166
Fax: (03) 6427 3161

MELBOURNE

92 Canterbury Road,
Bayswater North, VIC 3153
Tel: (03) 9751 7000
Fax: (03) 9751 7010

192 Burwood Road,
Hawthorn, VIC 3122
Tel: (03) 9214 4000
Fax: (03) 9214 4040

Seaford, VIC 3198
Tel: (03) 9770 8888
Fax: (03) 9775 1811

REGIONAL MELBOURNE

72-74 Main Road,
Ballarat, VIC 3350
Tel: (03) 5338 7837
Fax: (03) 5331 3335

Geelong, VIC 3220
Mob: 0418 522 515
Fax: (03) 5261 4234

ADELAIDE

15-17 Indama Street,
Regency Park, SA 5010
Tel: (08) 8347 0866
Fax: (08) 8347 0522

SUNSHINE COAST

27-43 Skyreach Street,
Caboolture, QLD 4510
Tel: (07) 5428 9200
Fax: (07) 5428 9222

GOLD COAST

134 Lahrs Road,
Ormeau, QLD 4208
Tel: (07) 5549 4100
Fax: (07) 5549 4111

HERVEY BAY

6 Miller Street,
Urangan, QLD 4655
Tel: (07) 4125 3188
Fax: (07) 4125 2188

PRODUCTS NOT AVAILABLE IN WA

Trend® National Customer Assistance Centre

(between 8:30am - 4:30pm EST, M-F)

13 72 74

www.trendwindows.com.au

email: info@trendwindows.com.au