








# RHEEM 27 CONTINUOUS FLOW WATER HEATER

|  |   |   |  |  |
|--|---|---|--|--|
| <br>GAS | <br>5.8 STAR | <br>2 - 6 PEOPLE | <br>27 L/MIN DELIVERY | <br>10 YEAR WARRANTY <sup>1</sup> |
|--|---|---|--|--|

27L/min Delivery




## FEATURES

- **5.8 Star energy efficiency** – good for the environment, and saves on energy costs
- **27 Litre/Minute continuous hot water delivery** – ideal for families and large homes<sup>3,4</sup>
- **Solar ready** – compatible with Solar systems, without the need for any additional fittings
- **Reduced water wastage** – reduced flow during start-up
- **Remote Temperature Controller options** for added convenience and safety
- 50°C models available, requiring no tempering valve<sup>2</sup>
- Commercial models available offering temperature delivery of up to **82°C**<sup>2</sup>
- 10 Year warranty<sup>1</sup>

## WHY CHOOSE FROM THE RHEEM CONTINUOUS FLOW HOT WATER RANGE?

- Never runs out of hot water
- Range of capacities from 18 – 27Litres/Minute<sup>3,4</sup>
- Ability to deliver up to 54L/Minute by linking two units with the Rheem EZ Link system<sup>4</sup>
- Flamesafe<sup>®</sup> overheat protection
- Digital display for easy fault diagnosis and service
- Frost protected down to -20°C
- Compact size models, perfect for any location with limited space
- Full technical support through Rheem's National Service Network
- Available to suit Natural Gas or Propane



INSTALL A RHEEM<sup>®</sup>






# RHEEM 27 CONTINUOUS FLOW WATER HEATER

## CONTINUOUS FLOW HOT WATER WHEN YOU NEED IT

Continuous Flow water heaters deliver hot water that never runs out because they heat water when you need it, for as long as you need it. They work differently to traditional storage water heaters, only heating on demand rather than heating and storing water until needed. 5 Star energy efficient, Rheem Continuous Flow water heaters are good for the environment and they mount conveniently to the wall, taking up less space.

With a wide range of capacities, there is a Rheem Continuous Flow model for every budget and family.

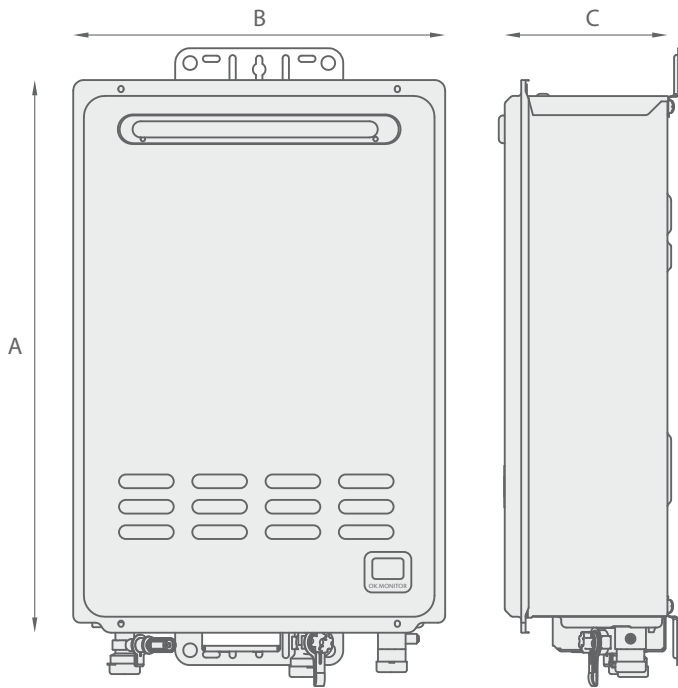

### MODEL RHEEM 27 CONTINUOUS FLOW

| OUTDOOR                         |                         |
|---------------------------------|-------------------------|
|                                 | 876027NF/PF 874027NF/PF |
|                                 | Natural Gas/<br>Propane |
| <b>Temperature (°C)</b>         | 50 60                   |
| Gas Energy Rating               | 5.8 Stars               |
| Flow Rate (L/Min at 25°C rise)  | 27L/Min                 |
| Minimum Operating Flow rate     | 2.0L/Min                |
| Gas Consumption (typical value) | 200 MJ/h                |
| Dimensions (mm)                 |                         |
| Height A                        | 600                     |
| Width B                         | 350                     |
| Depth C                         | 215                     |
| Approx Weight (kg)              | 23                      |
| Max. Water Supply Pressure      | 1000kPa                 |
| Min. Water Supply Pressure      | 140kPa                  |
| Cold Water Connection           | R ¾/20                  |
| Hot Water Connection            | R ¾/20                  |
| Gas Connection                  | R ¾/20                  |
| <b>Accessories</b>              |                         |
| Pipe Cover                      | 299830                  |
| Recess Box                      | 299831                  |
| Security Wall Mounting          | 299868                  |
| Security Cage                   | 299867                  |
| <b>Temp. Controllers</b>        |                         |
| Kitchen                         | 299850                  |
| Bathroom 1                      | 299851                  |
| Bathroom 2                      | 299852                  |
| <b>Deluxe Temp. Controllers</b> |                         |
| Kitchen                         | 299858                  |
| Bathroom 1                      | 299859                  |
| Bathroom 2                      | 299860                  |

<sup>1</sup> Continuous Flow Warranty Conditions  
10 Years Parts & Labour on Heat Exchanger,  
3 Years Parts & Labour warranty on all other components,  
for domestic (non-commercial) installations.

<sup>2</sup> 60°C and higher temperature models and some applications require a tempering valve  
in accordance with AS 3500.4.

<sup>3</sup> For details of models refer to Rheem Continuous Flow Gas Hot water brochure.

<sup>4</sup> At 25°C temperature rise

® Registered Trademark of Rheem Australia Pty Ltd.

™ Trademark of Rheem Australia Pty Ltd.



**Rheem Australia Pty Ltd.**  
1 Alan Street, Rydalmere, New South Wales 2116, Australia  
PO Box 6, Rydalmere, New South Wales 2116, Australia.  
Materials and data are subject to change without notice.

