



Technical Data Sheet

Specialist Primer

High performance water-based primer

Description

High performance aqueous primer for use on top of cured Dampfix PU (Polyurethane Waterproofing Membrane) and other specialist applications.

Viscous purple liquid.

Use only with approved products / systems

Recommended Uses

May be used on the surface of Dampfix PU prior to covering with approved products.

Compatible Substrates


- Dampfix PU
- Wall and Floor

Approved Compatible Products

- Asaflex 2 Part Tile Adhesive
- Dampfix Gold (min 1.2mm dry film thickness)

Important Note

This primer must only be used with the systems described in this datasheet. It will only work when used correctly as there are certain components that must be present for it to work. If there is any doubt contact Bostik Technical Services before commencing work.

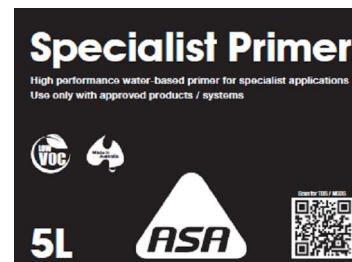

Application Instructions

Surface Preparation

Surface must be dry and free of contaminants (including dust, oil, grease, grit). The Dampfix PU to be covered must be cured for 3 – 7 days before applying primer.

Application

Use a brush or roller to apply a thin continuous film of primer to the cured surface. Apply at a rate of 5 – 6m² per litre, ensuring the entire area is covered.

Allow to become touch dry before covering.

If the primer has been dry for longer than 1 day, reapply a fresh coat and allow to dry before covering.

May only be covered with Asaflex two part tile adhesive, Dampfix Gold waterproofing membrane or other products approved by Bostik in writing.

Coverage

5 – 6m² per Litre

Drying Time

Approximately 3 – 4 hours at at 22°C and 50% RH. Will take longer when cooler/humid conditions and less time when warm / dry.

Clean-up

Remove immediately with clean water. If dry, remove mechanically. Avoid contact with porous materials as removal will be difficult

Important Information

Use only in approved applications.

- Products used with Specialist Primer require very specific components to be compatible.
- **Only Documents issued by the Bostik Technical Services Department can validate use on (or with) products other than those listed in this Technical Datasheet.**
- Read the Material Safety Datasheet before using
- Approved only for use on the top surface of cured Dampfix PU waterproofing membrane and not under or between coats.
- This primer is approved to be covered only with Asaflex two part tile adhesive, Dampfix Gold or other products specifically approved by Bostik in writing.
- When covering with Dampfix Gold ensure it is applied at a dry film thickness of least 1.2mm. If too thin, the Dampfix Gold may become tacky.
- All system components (including substrate) must be correctly installed and cured.
- This is not a waterproofing product nor will it rectify waterproofing issues.
- All waterproofing and tiling must be carried out to the relevant Australian Standards and good workmanship practices.
- Contact Bostik before work commences if there is any uncertainty regarding use or the suitability of the surface to be treated

Properties

Colour	Purple
Appearance:	Viscous liquid
VOC	6g/L

Specific gravity:	1.03 g/cm ³
Viscosity	5,000 cps (approx)

Storage & Shelf Life

Will keep for 12 months when stored unopened, between 5 – 30°C and protected from the elements (including direct sunlight).

Packaging

5L Pails

Health & Safety

SEE THE MATERIAL SAFETY DATA SHEET FOR ADDITIONAL INFORMATION.
EMERGENCY INFORMATION: 1800 033 111 (ALL HOURS)
 MSDS can be downloaded from www.bostik.com.au

Product Details

Item Number	Size	Colour
373877	5L	Purple



Scan for MSDS

The information in this Technical Data Sheet is intended for the assistance of purchasers and is of a general nature. It reflects the extent of our knowledge and experience of our products and is based on tests which we believe to be reliable. However, no guarantee of accuracy can be given due to the wide range of surfaces, environmental and field conditions and variations encountered in raw materials, manufacturing equipment and methods at the place where the work is performed. Some of these will be beyond our knowledge or control. We recommend purchasers carry out their own tests to determine the suitability of the product for their particular purposes. Bostik Australia Pty Ltd limits its liability to replacement of the products or refund of the purchase price, but this limitation does not affect consumers' rights which cannot by law be excluded.

**ALL SALES ARE EXPRESSLY LIMITED TO THE TERMS AND CONDITIONS OF SALE OF
BOSTIK AUSTRALIA PTY LTD**

Head Office: Bostik Australia Pty Ltd, 51-71 High Street, Thomastown Vic 3074
A.B.N. 79 003 893 838
Phone: (03) 9279 9333 Fax: (03) 9261 4744
Phone Construction/ASA: Toll free 1300 364 710

Branches: Sydney: 21 Tattersall Road, Kings Park NSW 2148
Brisbane: 2/64 Meakin Rd, Meadowbrook Qld 4131
Perth: 12 Thorpe Close, Welshpool WA 6016

Product Enquires: tiling.australia@bostik.com
construction.australia@bostik.com
voccertificates.australia@bostik.com

Product: Specialist Primer
Issue Date: August 2012
Issue No.: 01
Author: GS
Total Pages: 3



Quality
ISO 9001



Quality endorsed ISO9001 (Thomastown site)
TS16949 (Automotive).