



DESIGNED | to inspire

**RED SERIES** Direct Vent Gas Fireplaces





#### PFD40

The RED 40 works beautifully with non-traditional shapes, material and design elements. A 40-inch viewing area showcases elegant flames and linear style. Make it your own with many custom finishing options.

RED40 shown above with LED lights, scarlet media, absolute black granite refractory and surround, and standard safety mesh.



#### RED60

Take modern design to the next level. The RED 60 makes an impact in any space. A long, hypnotic ribbon flame rises through attractive modern media and dances along the 60-inch viewing area.

RED60 shown above with LED lights, crystal glass media, porcelain-ized steel refractory, and standard safety mesh front.



### **RED40 SEE-THROUGH**


Spread stunning style and warmth into two different spaces. The RED40 See-Through remains a staple of modern designs by Heat & Glo, and blends unique linear design elements with superior technology.

RED40-ST shown with black onyx media, porcelain-ized steel refractory, absolute black granite surround and standard safety mesh.



## ALWAYS IN STYLE

RED Series fireplaces explore cutting-edge designs and countless finishing options. LED accent lighting, modern media, surround and interior options let you create your own unique style.

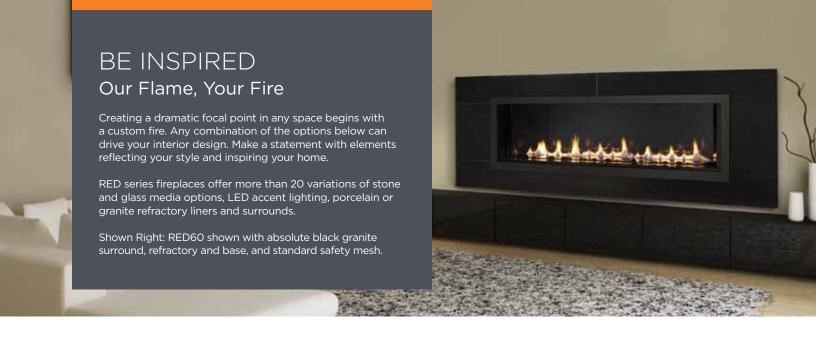


### **MEDIA OPTIONS**

The area around your flames can look many different ways. Choose the smooth, sleek look of black granite stone, or create a "fire & ice" effect with crystal glass rocks. The color contrasts are bold—and the look is amazing.

### MEDIA OPTIONS WITH LED ILLUMINATION









Scarlet

Emerald

Cobalt

Crystal

## USING THE CRYSTAL GLASS MEDIA you can choose up to 7 different colors of LED illumination







Crystal with red LED illumination



Crystal with green LED illumination



Crystal with blue LED illumination

### MEDIA OPTIONS WITHOUT LED ILLUMINATION








### **REFRACTORY OPTIONS**

The interior of your firebox comes alive with optional reflective black porcelain panels or highly polished black granite stone. Choose either of these options as an upgrade to customize your fire. Includes matching granite or porcelain base when no media is selected.



Black Porcelain refractory and base



Absolute Black Granite refractory and base

### SURROUND OPTIONS

Combining a black granite stone surround with a matching black granite refractory results in a true, seamless transition between firebox and surround. All RED Series fireplaces ship with a standard mesh frame.



Six-piece Stone Surround (Shown with required standard mesh) Absolute Black Granite



Standard Mesh Frame (Required)
One piece frame with mesh

### TAKE CONTROL

The WSK-21 wall control is included standard, or add an optional remote control for even more convenience.

CONTROL RECOMMENDATIONS										
	Wall Switch or Remote Control	IntelliFire or Standing Pilot	On/ Off	Pilot Activation	Temperature Readout	Thermostat Readout	Timer Mode	Battery Strength Indicator	Auto Battery Backup	
WSK-21 (Included)	Wall	Both	•							
SMART-STAT-HNG	Remote	Both	•		•	•	•			



WSK-21 Wall Control



Smart-Stat-HNG Remote Control

### INTELLIFIRE IGNITION SYSTEM

The IntelliFire™ Ignition System (IPI) is an advanced intermittent pilot ignition system. IPI constantly monitors ignition, ensures safe functioning and conserves up to \$10/month in energy costs. To learn more about IntelliFire Technology, scan the code to the right with your smartphone, or visit heatnglo.com.



## DIRECT VENT TECHNOLOGY

Direct Vent fireplaces remove 100% of combustion exhaust and odors outside of the home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality. To learn more about IntelliFire Technology, scan the code to the right with your smartphone, or visit heatnglo.com.



Lights			Media (I	f Lights)		Med	Media (If No Lights)			Refractory		
Lights	No Lights	Scarlet (Red)	Cobalt (Blue)	Emerald (Green)	Crystal (Clear)	Onyx (Black)	Opal (White)	None	Granite	Porcelain	None	Model name
•		•						•	•			RED40-LRG
•		•						•		•		RED40-LRP
•		•						•			•	RED40-LRN
•			•					•	•			RED40-LBG
•			•					•		•		RED40-LBP
•								•			•	RED40-LBN
•				•				•	•			RED40-LGG
•				•				•				RED40-LGP
•				•				•			•	RED40-LGN
•					•			•	•			RED40-LCG
•					•			•		•		RED40-LCP
•					•			•			•	RED40-LCN
	•								•			RED40-NOG
	•											RED40-NOP
	•										•	RED40-NON
	•								•			RED40-NWG
	•						•			•		RED40-NWP
	•										•	RED40-NWN
	•							•	•			RED40-NNG
	•							•				RED40-NNP
	•							•			•	RED40-NNN

Lig	jhts		Media (I	f Lights)		Me	dia (If No Ligi	hts)		Refractory		
Lights	No Lights	Scarlet (Red)	Cobalt (Blue)	Emerald (Green)	Crystal (Clear)	Onyx (Black)	Opal (White)	None	Granite	Porcelain	None	Model name
•		•						•	•			RED40ST-LRG
•		•						•		•		RED40ST-LRP
•		•						•			•	RED40ST-LRN
•			•					•	•			RED40ST-LBG
•			•					•		•		RED40ST-LBP
•			•					•			•	RED40ST-LBN
•				•				•	•			RED40ST-LGG
•				•				•		•		RED40ST-LGP
•				•				•			•	RED40ST-LGN
•					•			•				RED40ST-LCG
•					•			•		•		RED40ST-LCP
•					•			•			•	RED40ST-LCN
	•					•			•			RED40ST-NOG
	•									•		RED40ST-NOP
	•					•					•	RED40ST-NON
	•						•		•			RED40ST-NWG
	•						•			•		RED40ST-NWP
	•						•				•	RED40ST-NWN
	•							•	•			RED40ST-NNG
	•							•		•		RED40ST-NNP
	•							•			•	RED40ST-NNN

Lights			Media (I	f Lights)		Me	dia (If No Lig	hts)		Refractory		
Lights	No Lights	Scarlet (Red)	Cobalt (Blue)	Emerald (Green)	Crystal (Clear)	Onyx (Black)	Opal (White)	None	Granite	Porcelain	None	Model name
•		•						•	•			RED60-LRG
•		•						•		•		RED60-LRP
•		•						•			•	RED60-LRN
•			•					•	•			RED60-LBG
•			•					•		•		RED60-LBP
•			•					•				RED60-LBN
•				•				•	•			RED60-LGG
•				•				•		•		RED60-LGP
•				•				•			•	RED60-LGN
•					•			•	•			RED60-LCG
•					•			•		•		RED60-LCP
•					•			•				RED60-LCN
	•					•			•			RED60-NOG
	•					•				•		RED60-NOP
	•					•					•	RED60-NON
	•						•		•			RED60-NWG
	•						•			•		RED60-NWP
	•						•				•	RED60-NWN
	•							•	•			RED60-NNG
	•							•		•		RED60-NNP
	•							•			•	RED60-NNN

# MODERN MADE EASY - Customize your RED Series fireplace in 4 easy steps



# ACCENT LIGHTING

□YES\*

\*LED Accent Lighting for glass media options only

## MEDIA

CRYSTAL (Glass)

SCARLET (Glass)

EMERALD (Glass)

COBALT (Glass)

☐ OPAL (Stone)
☐ ONYX (Stone)
☐ GRANITE (Stone)

### REFRACTORY

BLACK POWDER CT\*
BLACK PORCELAIN
BLACK GRANITE

\*Standard Finish

## SURROUND


BLACK GRANITE
CUSTOM\*

\*Non-factory

# SIX-PIECE STONE SURROUND DIMENSIONS

MODEL	FRONT WIDTH	HEIGHT	DEPTH	MATERIAL
MODEL	Unit	Unit	Unit	
RED40/RED40 See-Through	68-3/4	29	3/4	Absolute Black Granite
RED60	88-3/4	33	3/4	

MODEL	А	В	С
RED40/RED40 See-Through	29	13	68-3/4
RED60	33	17	88-3/4



## **EFFICIENCIES**

#### **U.S. EFFICIENCIES**

**Steady State** - Since most homeowners use their fireplaces for an extended time while they are in the room, Steady State measures how efficiently your fireplace converts fuel to heat once it is warmed up and running in a "steady state".

**AFUE** - AFUE rating is more typically used with appliances, like your furnace, that continually cycle on and off to maintain a constant temperature.

### **CANADA EFFICIENCIES**


**EnerGuide (CSAP.4.1.-02) -** EnerGuide is a rating used in Canada to measure annual fireplace efficiency.

RATING	RED40	RED40-ST	RED60		
Steady	67.2% (NG),	69.7% (NG),	59.0% (NG),		
State	67.2% (LP)	69.7% (LP)	59.0% (LP)		
AFUE	52.4% (NG),	64.3% (NG),	57.2% (NG),		
	55.4% (LP)	60.0% (LP)	57.2% (LP)		

RATING	RED40	RED40-ST	RED60
EnerGuide	57.2% (NG),	66.4% (NG),	59.7% (NG),
(CSA P.4.1-02)	57.5% (LP)	61.5% (LP)	59.7% (LP)

### **RED SERIES SPECIFICATIONS**

MODEL	FRONT	WIDTH	BACK	WIDTH	HEI	GHT	DE	PTH	GLASS SIZE	BTU/HOUR INPUT
FIODEL	UNIT	FRAMING	UNIT	FRAMING	UNIT	FRAMING	UNIT	FRAMING	OLASS SIZE	Bro/Hook IIVI or
RED40	48-1/8	50-1/4	48-1/8	50-1/4	46-3/4	46-3/4	18-3/4	18-1/4	42-1/2 x 17	34,000 (NG), 34,000 (LP)
RED40-ST	48-1/8	50-1/4	48-1/8	50-1/4	46-3/4	46-3/4	18-1/8	17-1/4	42-1/2 x 17	34,000 (NG), 34,000 (LP)
RED60	68-1/8	70-3/8	68-1/8	70-3/8	50-3/4	51	18-1/8	18-1/4	62-1/2 x 21	44,000 (NG), 43,000 (LP)

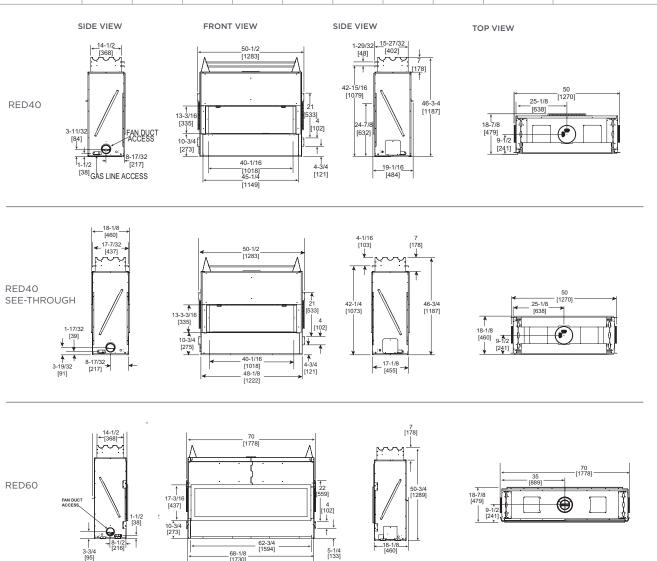

Dimensions above are in inches. Reference dimensions only. We recommend measuring individual units at installation. Assumes the use of 1/2" Sheetrock. NOTE: Combustible material should not be installed over the face. Make sure you do NOT cover the decorative door opening.

Refer to installation manual for detailed specifications on installing this product. Heat & Glo reserves the right to update units periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Pictures in this brochure are not a true representation of the fireplace and/or flames.

For complete information on this model, please contact us at:



No one builds a better fire

A brand of Hearth & Home Technologies Inc.® 7571 215th Street West, Lakeville, MN 55044 Web: heatnglo.com Phone: (888) 427-3973 (952) 985-6000 E-mail: info@heatnglo.com



youtube.com/HeatandGlo

HNG-1110U-1012

### LIMITED LIFETIME WARRANTY\*

The strongest in the industry, Heat & Glo provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

\*For full warranty details, go to www.heatnglo.com.
Fireplace glass and other surfaces get extremely HOT and can cause severe burns if touched. Do not remove the protective safety screen from the front of the glass. Keep a safe distance away. To learn more visit www.fireplaces.com/fireplacesafety



