



# Schlage Omnia™



## SCHLAGE BREEZE



### Use the Schlage Breeze App

- Add admins, users and passcodes
- Access codes - up to 150 custom and 150 scheduled
- Send virtual keys to guests, via text message
- Set auto locking and passage mode
- Use the Schlage Wi-Fi Bridge for remote access

### Pair the Schlage Omnia through the Schlage Breeze App

- Follow the instructions on the app
- Make sure you are on site
- Pair with all locks in proximity
- Must make sure the lock is ready to pair (simply touch lock keypad)

### Having Trouble Pairing?

Reset your Schlage Omnia Lock by following the instructions on the next page

### Download the Schlage Breeze App



Scan  
for iOS



Scan for  
Android




Scan for  
product info

For any enquiries, contact the Technical Support Hub on 1300 898 596 or email [techsupport.au@allegion.com](mailto:techsupport.au@allegion.com)

## How to reset your Schlage Omnia™ Smart Lock


### 1.

Remove the Schlage Omnia™ from your door by removing the two screws located on the interior body.

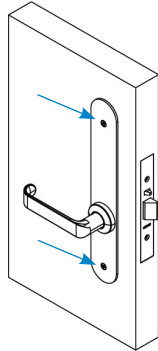

### 2.

Ensure the batteries are installed and the lock has power.




### 3.

Hold down the reset button located on the inside of the exterior body, for 5 seconds until you hear “Input initialisation code.”

**Note:** A long, pointed object will be required to reach the small button.

**Note:** If you hear “Please enter administrator code.” then you have not held down the button for long enough, please try again.

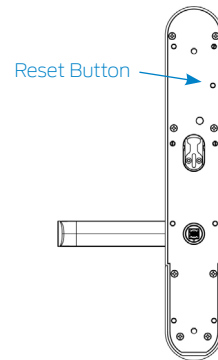


### 4.

Enter 000000#  
(six zeros then hash).




### 5.

You will hear “Deleting administrator successful.”  
You can now reinstall the Schlage Omnia™ on the door.



### 6.

Your Schlage Omnia™ Smart Lock has now been reset back to factory settings and can be paired to the Schlage Breeze app.



### 7.

Open the Schlage Breeze mobile app and follow the instructions to pair your Schlage Omnia™ Smart Lock.

