

# GLAZE

## Low Rise Platform Lift



**For up to 2m of travel**

Easy Living Home Elevators provide access solutions for residential and commercial applications. The SITES low rise platform wheelchair access lift has been developed with a focus on design for applications with a travel of up to 2000mm. Its glass and aluminium construction provides both modern aesthetics and strength, making the Sites platform lift, the perfect choice for all kinds of environments.

The SITES platform lift is suitable for both indoor and outdoor installations and is the ideal solution where ramps are not possible. The lift is operated by an easy to use control panel and no machine room is required. The safe and robust design complies with the requirements of the BCA and the latest Australian Safety and Quality Standards.

The Sites vertical platform is an extremely versatile product available in various types of finishes and can be manufactured to your requirements.

Very short lead times allow for quick installation.



**"in stock"**

ready to solve your  
accessibility solutions  
quickly

### Some of the impressive features include:

- > Glass panels fitted on the platform sides
- > Single wing powered gates
- > Optional Safety Bellows under the platform
- > Hold to run type controls
- > On board console
- > Incorporated power unit - no machine room required.




# GLAZE Low Rise Platform lift



<b>Compliant</b>	<b>BCA and Australian Standards AS1735.14 &amp; 15.</b>
<b>Max Carrying Capacity</b>	300kg
<b>Platform Size</b>	w 1120 x d 1500mm
<b>Max Travel</b>	2000mm (this dimension is critical to +/- 10mm)
<b>Min Shaft Dimensions</b>	w 1180 x d 1550mm Refer to Special Note below
<b>Pit Depth</b>	215 if travel < 1500mm 255 if travel > 1500mm
<b>Power Supply</b>	220 V, 20amp, single phase
<b>Controls Tension</b>	24 VCC
<b>Speed</b>	2m/min
<b>Gates &amp; Railings Height</b>	1100mm
<b>Clear Gate Width</b>	902mm
<b>Control</b>	Constant Pressure Control
<b>Machine Room Location</b>	On board
<b>Fixings</b>	The structure is fixed to the building at the pit floor and landing entrance

**SPECIAL NOTE** The structure proposed is of standard design. It is suitable to support the lift only and cannot be used as a structural member for the surrounding building.

## Machine Roomless

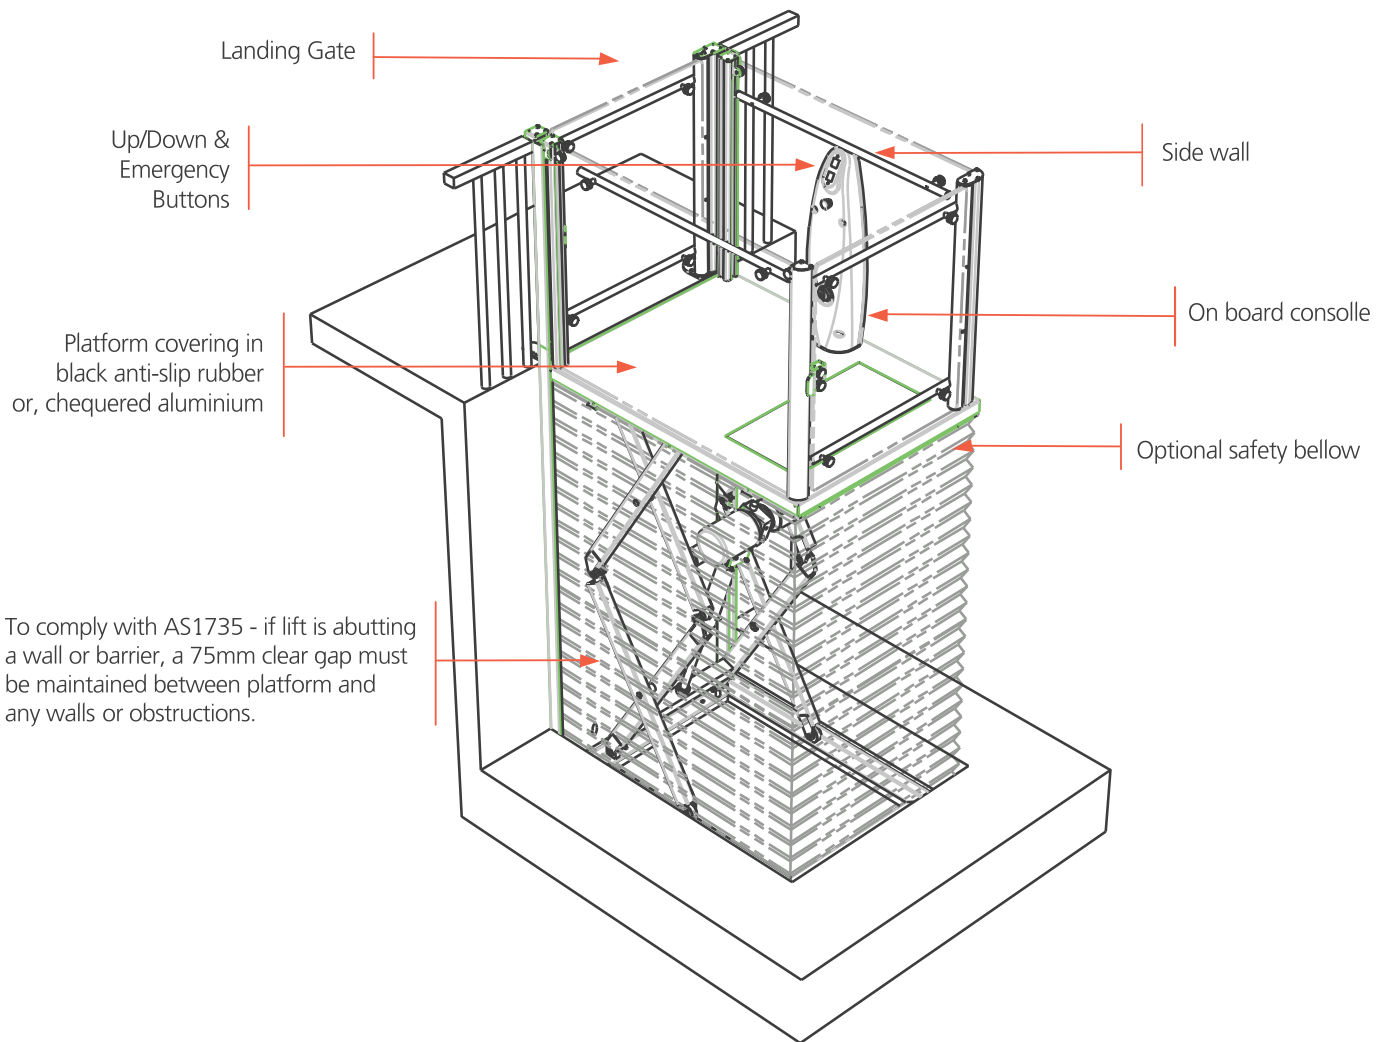

For further information on Easy Living Home Elevators products please visit our website at: [www.easy-living.com.au](http://www.easy-living.com.au) or come into our showroom at the following locations, by appointment.

**NSW**  
64 Penshurst St  
Willoughby NSW 2068  
T. 02. 8116 1500  
F. 02. 8116 1511

**VIC - SA - TAS**  
7 Hoddle St  
Collingwood VIC 3066  
T. 03. 9094 8600  
F. 03. 9094 8611

**QLD**  
17 Campbell St  
Bowen Hills QLD 4006  
T. 07. 3851 7500  
F. 07. 3851 7511

**WA**  
6/347-351 Great Eastern Hwy  
Redcliffe WA 6104  
T. 08. 9322 4688  
F. 08. 9322 4655

 **easy living**<sup>®</sup>  
**home elevators**  
*designed to impress*<sup>®</sup>

Note: Easy Living Home Elevators reserves the right to change the specifications without notice.