

"COLDSAVER" FREEZER RAPID ROLL DOOR

Another product from the DMF range

The COLDSAVER Rapid Roll Door is designed specifically for freezer applications operating at down to -30degC. It is a reliable and durable door, yet providing a simplicity that allows non specialist installation.

Many options are available as listed overleaf.

doors with intelligence

Suitable for

Freezers down to -30degC

Freezer Ante rooms

Coolrooms

Temperature sensitive areas

Hot rooms up to 70degC

Noisy areas



Custom-made to suit your application



www.dmf.com.au

Since 1967, DMF International has been creating only the best climate control door systems for the Australian and export markets. The COLDSAVER DOOR continues this great tradition.




MORE DETAIL TO EVALUATE YOUR SELECTION

- Door speeds up to 1.2m/sec
- Max sizes 4500H x 4500W
- Structure is extruded alum (Alloy 6063-T6) and bolted assembly meaning no weld joints that can rust
- Closed cell XPS with thickness of 15mm, coated in 900gsm fire resistant polymer
- Thermal transmittance reduced by heat bridging.
- Thermal insulation as low as $U = 0.40 \text{ W/sq.mt.K}$
- Sound insulation 14dB A
- Internal Deviflex heating system
- Soft flexible bottom rail to 3500mm
- 3 ph or single phase PLC programmable controller
- Soft start / stop and variable speed control

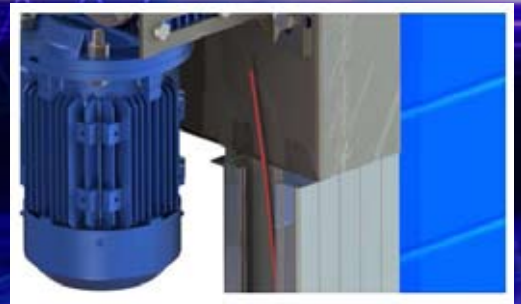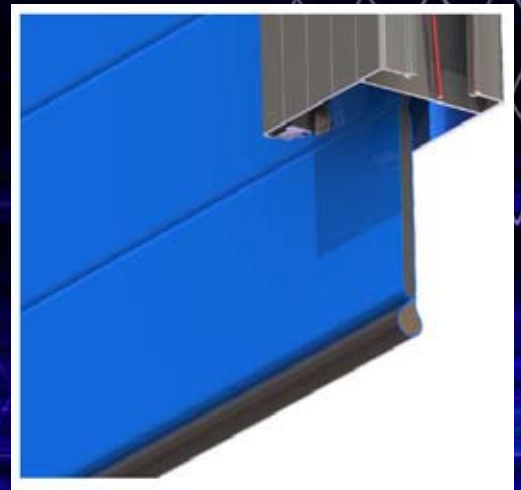

OPTIONS

- Many panel colours to select from
- Stainless steel 304
- Interlocking between up to 3 doors
- Roller dust covers
- Battery backup
- Powdercoated colour
- Activation



Pushbuttons Pullcords
Motion sensors Induction floor loops
Remote control Photo eye beams
Swipe cards and integration



DMF has a range of doors to assist in the control of temperature, dust, vermin and security, in areas such as food processing, warehousing, packaging, coolrooms and freezers.

doors with intelligence

www.dmf.com.au

DMF INTERNATIONAL PTY LTD
88 - 90 MAGOWAR RD GIRRAWEEEN
PO BOX 12 PENDLE HILL
SYDNEY NSW 2145 AUSTRALIA
Tel +61 2 96365466 Fax + 61 2 96881531

Your local distributor :